CEL

NEC's HIGH ISOLATION VOLTAGE SINGLE TRANSISTOR TYPE MULTI PHOTOCOUPLER SERIES

PS2501-1,-2,-4
PS2501L-1,-2,-4

FEATURES

- **HIGH ISOLATION VOLTAGE**
  BV: 5kV$_{r.m.s.}$ MIN
- **HIGH COLLECTOR TO EMITTER VOLTAGE**
  V_{CEO}: 80 V MIN
- **HIGH CURRENT TRANSFER RATIO**
  CTR: 300% TYP
- **HIGH SPEED SWITCHING**
  t_r = 3 μs, t_f = 5 μs TYP
- **LOW COST**
- **ISOLATED CHANNELS PER EACH PACKAGE**

DESCRIPTION

NEC's PS2501-1, -2, -4 and PS2501L-1, -2, -4 are optically coupled isolators containing a GaAs light emitting diode and an NPN silicon phototransistor. PS2501-1, -2, -4 are in a plastic DIP (Dual In-line Package) and PS2501L-1, -2, -4 are lead bending type (Gull-wing) for surface mount.

APPLICATIONS


Interface circuit for various instrumentations and control equipments


- **AC LINE / DIGITAL LOGIC**
- **DIGITAL LOGIC / DIGITAL LOGIC**
- **TWISTED PAIR LINE RECEIVER**
- **TELEPHONE / TELEGRAPH LINE RECEIVER**
- **HIGH FREQUENCY POWER SUPPLY FEEDBACK CONROL**
- **RELAY CONTACT MONITOR**
- **POWER SUPPLY MONITOR**

ELECTRICAL CHARACTERISTICS (T_A = 25°C)

PART NUMBER				PS2501-1, -2, -4 PS2501L-1, -2, -4		
	SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX
Diode	V_F	Forward Voltage, I_F = 10 mA	V		1.17	1.4
	I_R	Reverse Current, V_R = 5 V	μA			5
	C	Junction Capacitance, V= 0, f = 1.0 MHz	pF		50	
Transistor	I_{CEO}	Collector to Emitter Dark Current, Vce = 80 V, I_F = 0	nA			100
	BV_{CEO}	Collector to Emitter Breakdown Voltage, I_C = 1 mA, IB = 0	V	40	60	
	BV_{ECO}	Emitter to Collector Breakdown Voltage, I_E = 100 μA, I_B = 0	V	7	9	
Coupled	CTR	Current Transfer Ratio [1], I_F= 5 mA, V_{CE} = 5 V	%	80	300	600
	$V_{CE\ (sat)}$	Collector Saturation Voltage, I_F = 10 mA, I_C = 2 mA	V			0.3
	R_{1-2}	Isolation Resistance, V_{IN-OUT} = 1.0 kV	Ω	10^{11}		
	C_{1-2}	Isolation Capacitance, V = 0, f = 1.0 MHz	pF		0.5	
	t_r	Rise Time [2], V_{CC} = 10 V, I_C = 2 mA, R_L = 100 Ω	μs		3	
	t_f	Fall Time [2], V_{CC} = 10 V, I_C = 2 mA, R_L = 100 Ω	μs		5	

Notes:
1. CTR rank (PS2501-1, PS2501L-1 only)
2. Test Circuit for Switching
   K: 300 to 600 %
   L: 200 to 400 %
   M: 80 to 240 %
   D: 100 to 300 %
   H: 80 to 160 %
   W: 130 to 260 %
   Q: 100 to 200%
   N: 80 to 600 %

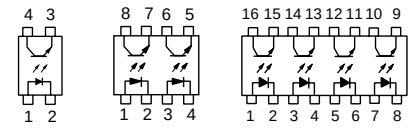

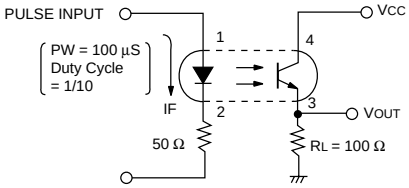


ABSOLUTE MAXIMUM RATINGS[1] (T_A = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS	
			PS2501-1 PS2501L-1	PS2501-2,4 PS2501L-2, 4
Diode				
I_F	Forward Current	mA	80	80
V_R	Reverse Voltage	V	6	6
ΔP_D/°C	Power Dissipation Derating	mW/°C	1.5	1.2
P_D	Power Dissipation	mW/Ch	150	120
$I_{F\ (PEAK)}$	Peak Forward Current (PW = 100 μs, Duty Cycle 1%)	A	1	1
Transistor				
V_{CEO}	Collector to Emitter Voltage	V	80	80
V_{ECO}	Emitter to Collector Voltage	V	7	7
I_C	Collector Current	mA	50	50
ΔP_C/°C	Power Dissipation Derating	mW/°C	1.5	1.2
P_C	Power Dissipation	mW/Ch	150	120
Coupled				
BV	Isolation Voltage [2]	$V_{r.m.s.}$	5000	5000
T_{STG}	Storage Temperature	°C	-55 to +150	-55 to +150
T_{OPT}	Operating Temperature	°C	-55 to +100	-55 to +100
T_{SOL}	Lead Temperature (Soldering 10 s)	°C	260	260
P_T	Total Power Dissipation	mW/Ch	250	200


Notes:
1. Operation in excess of any one of these parameters may result in permanent damage.
2. AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and ouput.

TYPICAL PERFORMANCE CURVES (T_A = 25 °C)

DIODE POWER DISSIPATION vs. AMBIENT TEMPERATURE

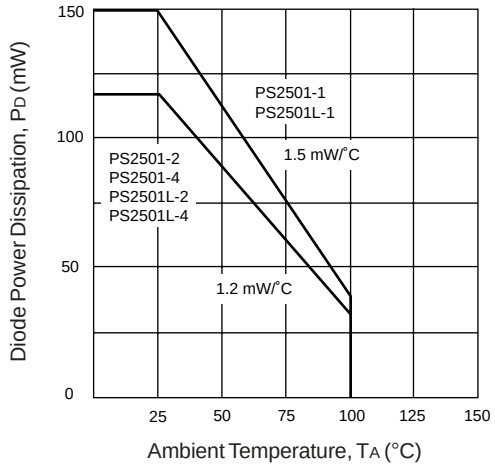


TRANSISTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE

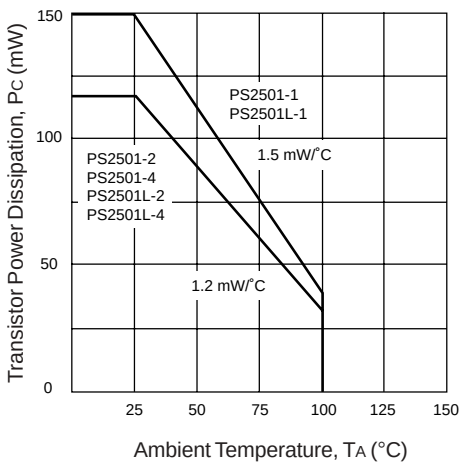


TYPICAL PERFORMANCE CURVES (T_A = 25 °C)


FORWARD CURRENT vs. FORWARD VOLTAGE

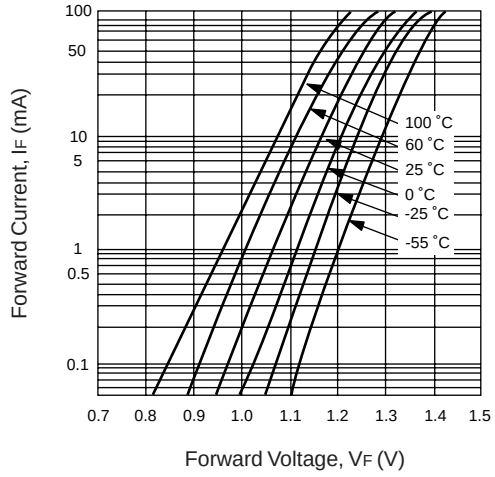


COLLECTOR CURRENT vs. COLLETOR to EMITTER VOLTAGE

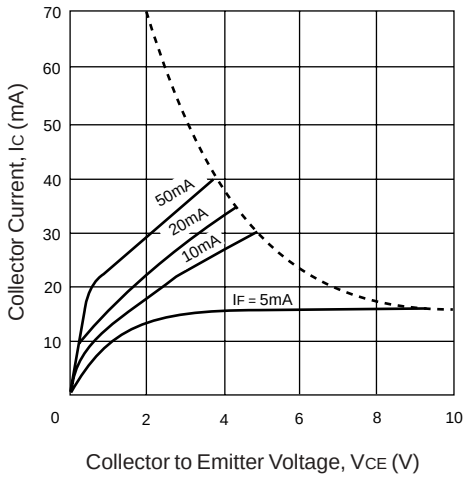


COLLECTOR TO EMITTER DARK CURRENT vs. AMBIENT TEMPERATURE

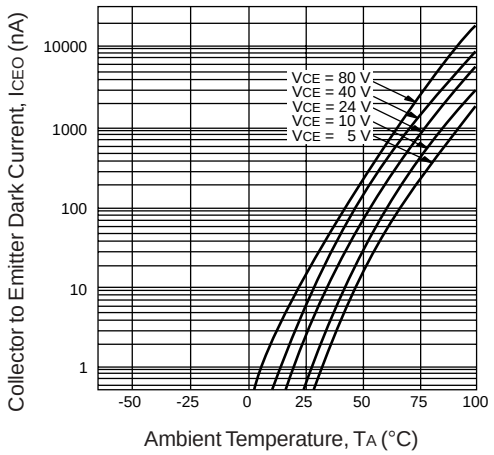


COLLECTOR CURRENT vs. COLLECTOR SATURATION VOLTAGE

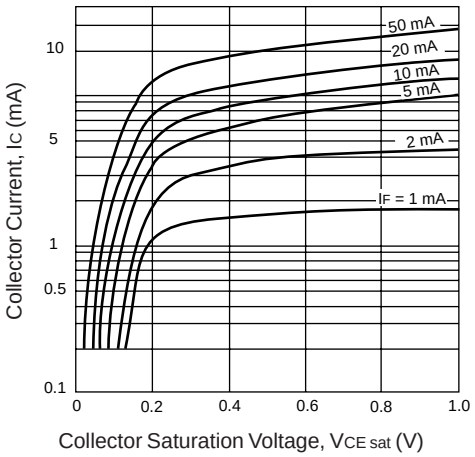

NORMALIZED OUTPUT CURRENT vs. AMBIENT TEMPERATURE

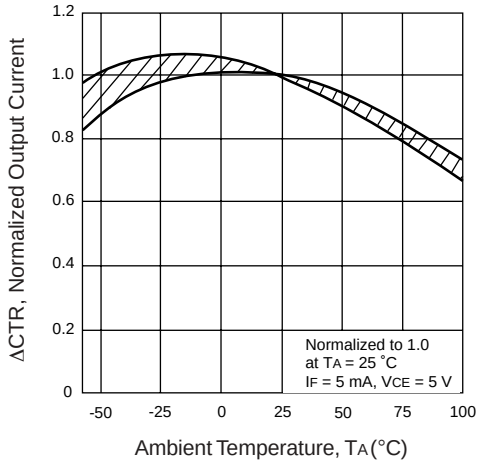


CURRENT TRANSFER RATIO vs. FORWARD CURRENT

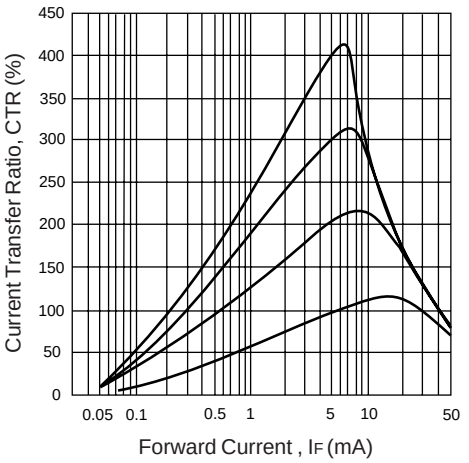


TYPICAL PERFORMANCE CURVES (T_A = 25 °C)


SWITCHING TIME vs. LOAD RESISTANCE

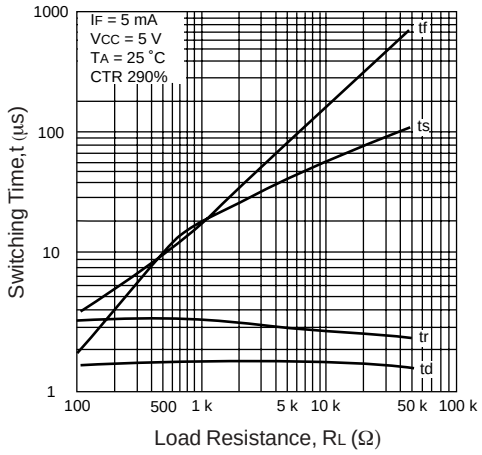


SWITCHING TIME vs. LOAD RESISTANCE

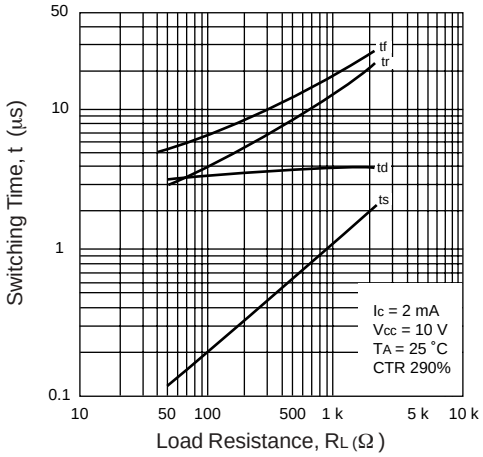

FREQUENCY RESPONSE

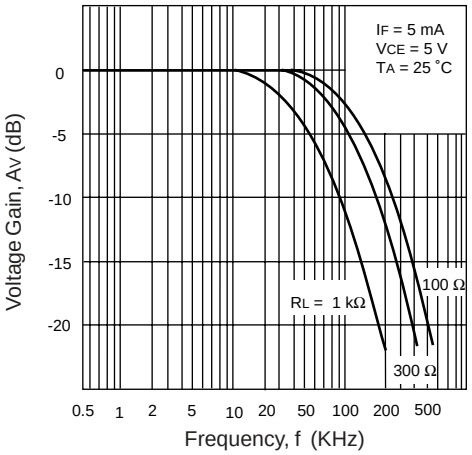


LONG TERM CTR DEGRADATION

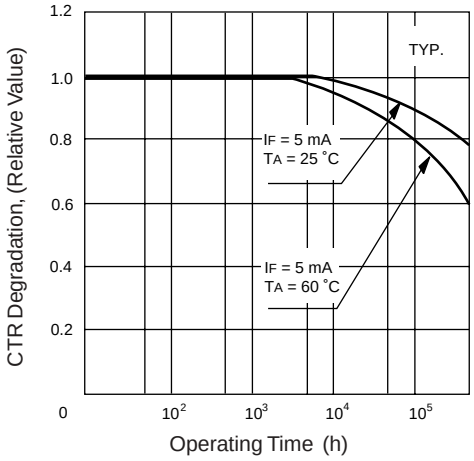


OUTLINE DIMENSIONS (Units in mm) **DIP (Dual In-line Package)**


PS2501-1

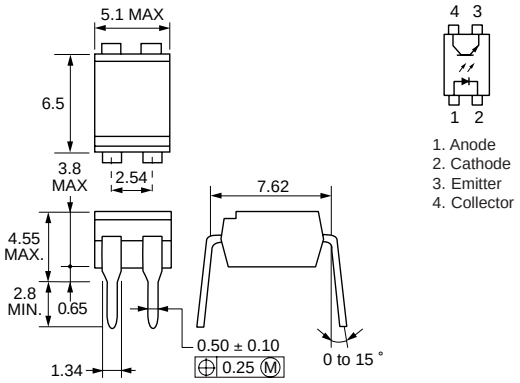

PS2501-2

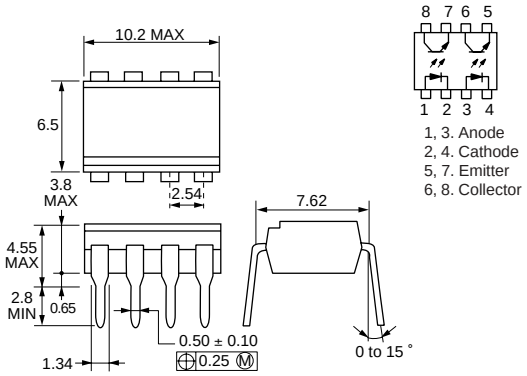


PS2501-4

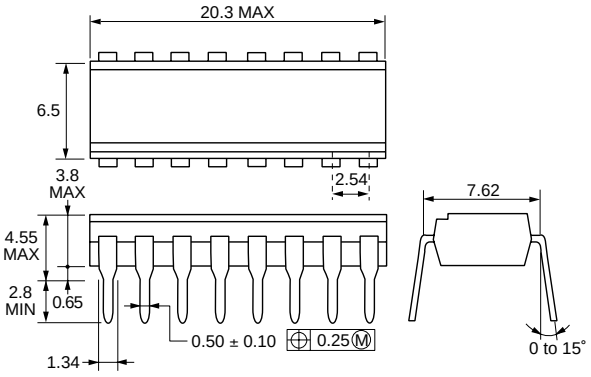


OUTLINE DIMENSIONS (Units in mm) **Lead Bending Type (Gull-wing)**


PS2501L-1

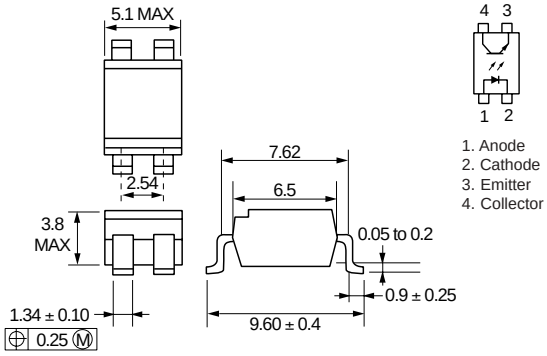

PS2501L-2

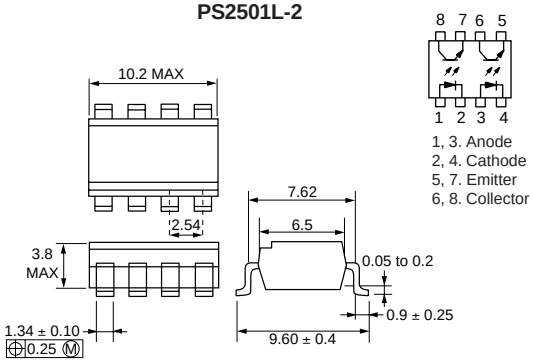


PS2501L-4

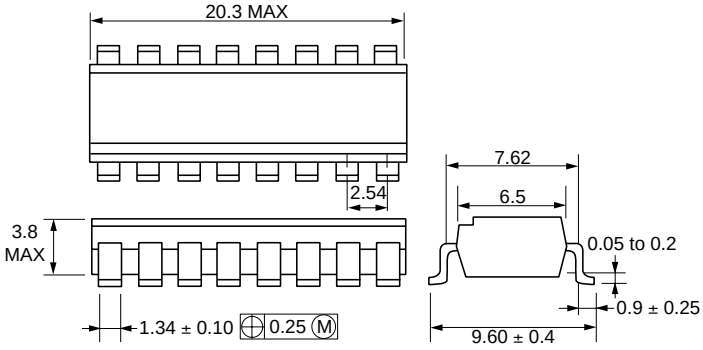


OUTLINE DIMENSIONS (Units in mm)

PS2501-1*

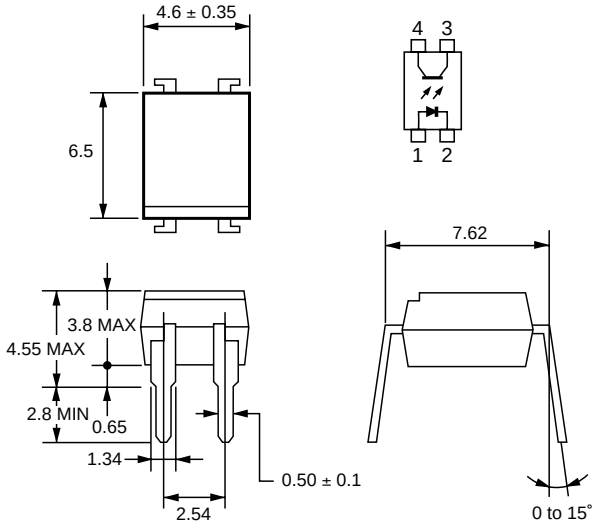

PS2501L-1*

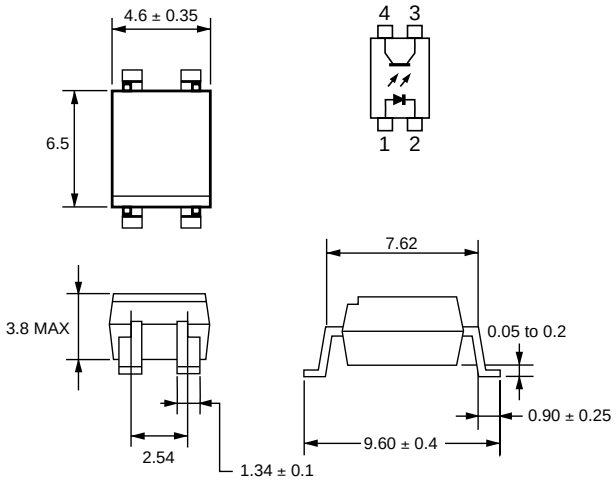

*These packages are manufactured using the new Phoenix manufacturing process, and are interchangeable with the standard PS2501-1 and PS2501L-1.

Life Support Applications
These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.