东 莞 市 亿 彩 电 子 科 技 有 限 公 司

DONG GUAN EVERCOLOR ELECTRONICS CO.,LTD.

规格书

SPECIFICATION

型号： MODEL:	**YC-ST150H08**
版本号： REV:	V1.0

客户承认 **APPROVED BY CUSTOMER**		
确认意见 COMMENTS	审核 CHECKED BY	批准 APPROVED BY

客户承认签章后敬请回传正本一份

Please kindly countersign the document and send it back for our record

东 莞 市 亿 彩 电 子 科 技 有 限 公 司
DONG GUAN EVERCOLOR ELECTRONICS CO.,LTD.

Technical Data Sheet
Opto Interrupter

YC-ST150H08

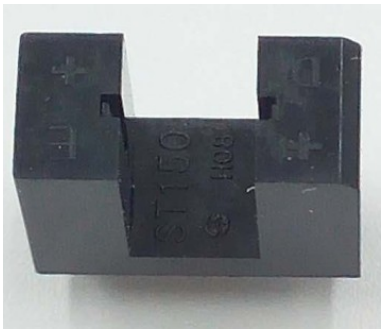

Features

- Fast response time
- High analytic
- Cut-off visible wavelength λp=940nm
- High sensitivity
- Pb free
- This product itself will remain within RoHS compliant version

Descriptions

The YC-ST150H08 consist of an infrared emitting diode and an NPN silicon phototransistor, encased side-by-side on converging optical axis in a black thermoplastic housing .The phototransistor receives radiation from the IR only .This is the normal situation. But when an object is between the IR and PT, phototransistor could not receives the radiation. For additional component information, please refer to IR and PT.

Applications

- Mouse Copier
- Switch Scanner
- Floppy disk driver
- Non-contact Switching
- For Direct Board

Device Selection Guide

Device No.	Chip Material	LENS COLOR
IR	GaAlAs	Water clear
PT	Silicon	Water clear

YC-ST150H08

■ Package Dimensions

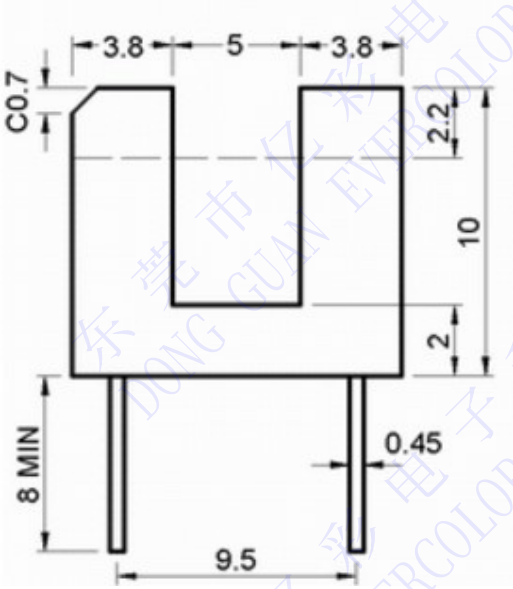

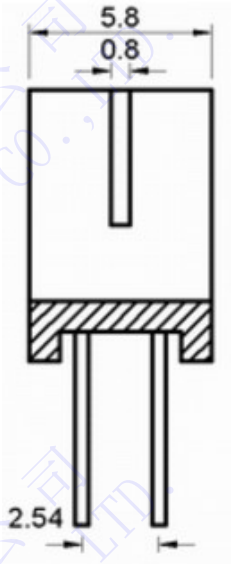

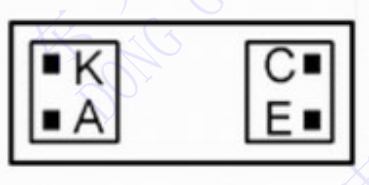



注：引脚长度可定制

1.All dimensions are in millimeters
2.Tolerances unless dimensions ±0.25mm
3.Lead spacing is measured where the lead emerge from the package

YC-ST150H08

■ Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25℃ Free Air Temperature	Pd	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current (*1) Pulse width ≦100 μs, Duty cycle=1%	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	75	mW
	Collector Current	I_C	20	mA
	Collector-Emitter Voltage	B V_{CEO}	30	V
	Emitter-Collector Voltage	B V_{ECO}	5	V
Operating Temperature		Topr	-25~+85	°C
Storage Temperature		Tstg	-40~+100	°C
Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds)		Tsol	260	°C

(＊1) tw=100 μsec., T=10 msec. (＊2) t=5 Sec

■ Electro-Optical Characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	V_F	---	1.2	1.5	V	I_F=20mA
	Reverse Current	I_R	---	---	10	μA	V_R=5V
	Peak Wavelength	λ_P	---	940	---	nm	I_F=20mA
	View Angle	2θ1/2	---	40	---	Deg	I_F=20mA
Output	Dark Current	I_{CEO}	---	---	100	nA	V_{CE}=20V,Ee=0mW/cm^2
	C-E Saturation Voltage	V_{CE}(sat)	---	---	0.4	V	I_C=2mA ,Ee=1mW/cm^2
Transfer Characteristics	Collect Current	I_C(ON)	0.5	---	---	mA	V_{CE}=5V I_F=20mA
	Rise time	t_r	---	15	---	μsec	V_{CE}=5V I_C=1mA R_L=1KΩ
	Fall time	t_f	---	15	---	μsec	

YC-ST150H08

Typical Electrical-Optical Characteristics Curves for IR

Fig.1 Forward Current vs. Ambient Temperature

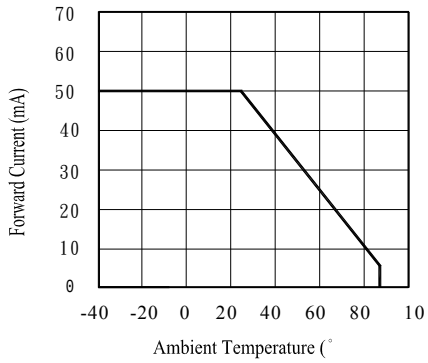

Fig.2 Spectral Distribution Wavelength

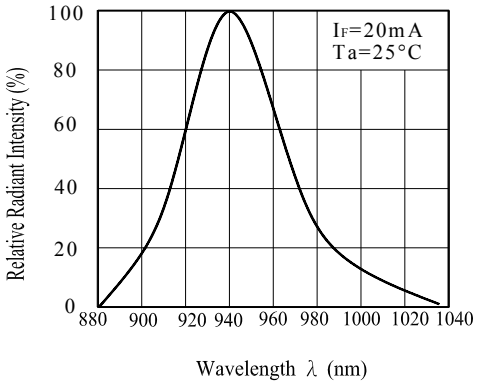

Fig.3 Ie-Radiant Intensity vs. I_F- Forward Current

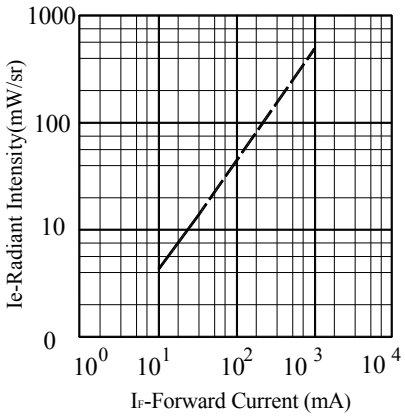

Fig.4 Relative Radiant Intensity vs. Angular Displacement

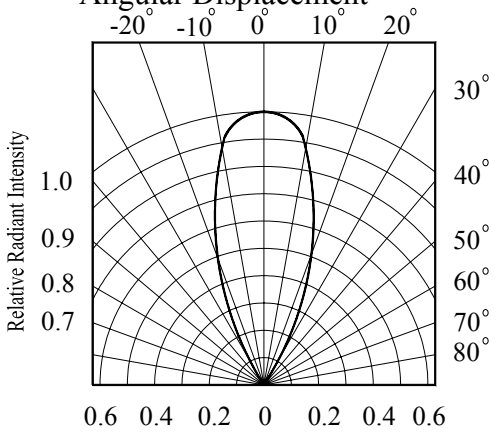

Fig.5 Ie-Radiant Intensity vs. Ambient Temperature(°C)

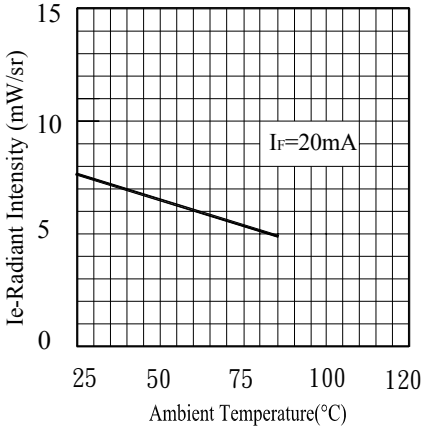

Fig.6 Relative Forward Voltage vs. Ambient Temperature(°C)

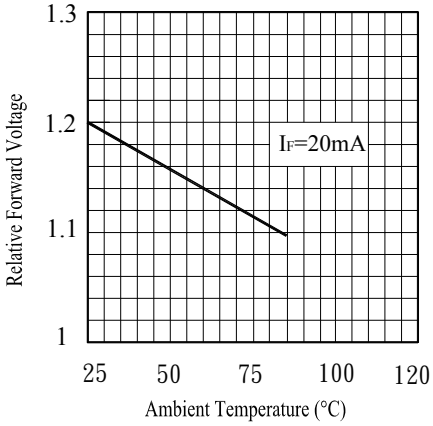

Typical Electrical-Optical Characteristics Curves for PT

Fig.1 Collector Power Dissipation vs. Ambient Temperature

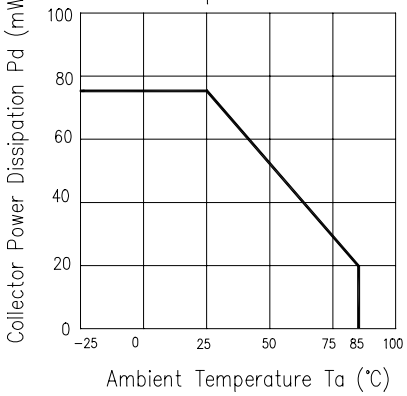

Fig.2 Collector Dark Current vs.Ambient Temperature

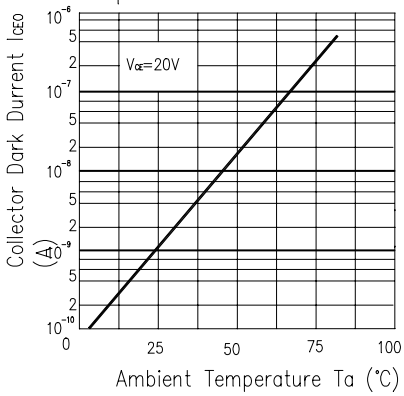

Fig.3 Relative Collector Current vs. Ambient Temperature

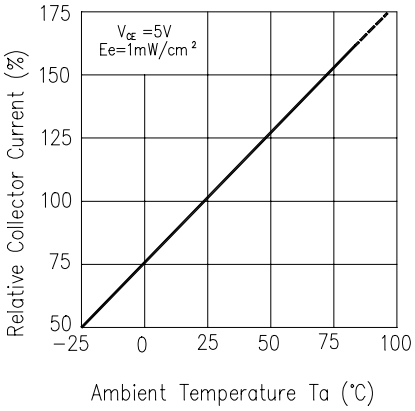

Fig.4 Collector Current vs. Irradiance

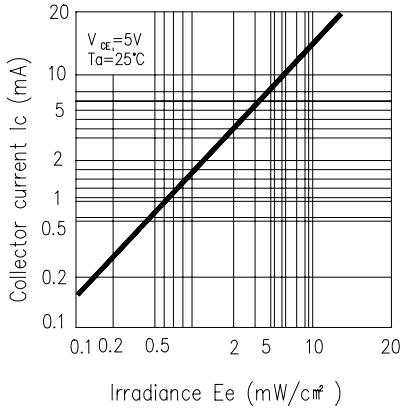

Fig.5 Spectral Sensitivity

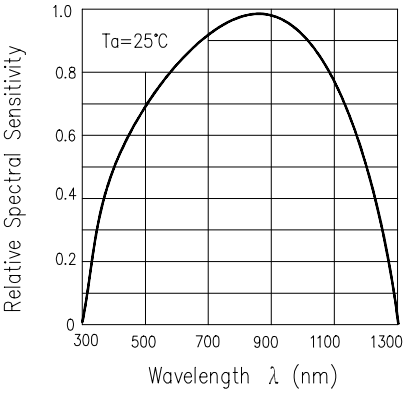

Fig.6 Collector Current vs. Collector Current Ic (mA)

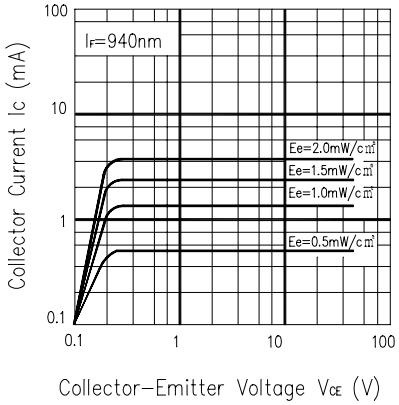

YC-ST150H08

Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.
Confidence level：90%
LTPD：10%

NO.	Item	Test Condition	Test Hours/ Cycle	Sample Size	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5°C	10sec	22 PCs	Attenuation of Light Current value>20%	0/1
2	Temperature Cycle	H : +100°C 15 mins ↕ 5 min L : -40°C 15 mins	300 cycle	22 PCs		0/1
3	Thermal Shock	H : +100°C 5 min ↕ 10 sec L : -10°C 5 min	300 cycle	22 PCs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 PCs		0/1
5	Low Temperature Storage	TEMP. : -40°C	1000 hrs	22 PCs		0/1
6	DC Operating Life	V_{CE}=5V I_F=20mA	1000 hrs	22 PCs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 PCs		0/1

YC-ST150H08

Packing Quantity Specification

250Pcs/Bag,4Bag/Box,10Boxes/Carton

Label Form Specification

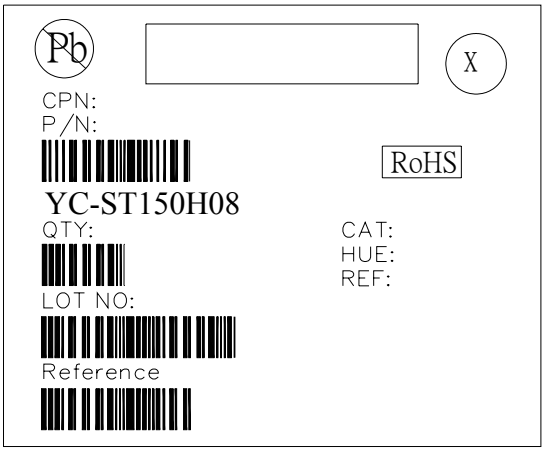

CPN: Customer's Production Number
P/N : Production Number
QTY: Packing Quantity
CAT: Ranks
HUE: Peak Wavelength
REF: Reference
LOT No: Lot Number
X: Month
Reference: Identify Label Number

Notes

1.All dimensions are in millimeters
2.Tolerances unless dimensions ±0.25mm
3.Lead spacing is measured where the lead emerge from the package
4.Above specification may be changed without notice. Dong Guan YICAI will reserve authority on material change for above specification
5.These specification sheets include materials protected under copyright of Dong Guan YICAI corporation . Please don't reproduce or cause anyone to reproduce them without Dong Guan YICAI 's consent
6.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. Dong Guan YICAI assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.