
Threshold Switch

TCA 105

Bipolar IC

Features

- Wide range of supply voltage, 4.5 to 30 V
- High output current, 50 mA
- TTL-compatible
- Triggerable with DC signal



P-DIP-6-1




P-DSO-6


	Type	Ordering Code	Package
S	TCA 105	Q67000-A527	P-DIP-6-1
S	TCA 105 B	Q67000-A587	P-DIP-6-1
S	TCA 105 G	Q67000-A988	P-DSO-6 (SMD)

The TCA 105 contains an oscillator stage, a threshold switch, and two anti-valent output stages. The IC is especially suitable for application in proximity switches, light reflection switches, and other contactless switching applications.


TCA 105, TCA 105 B

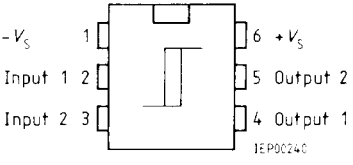


TCA 105 G

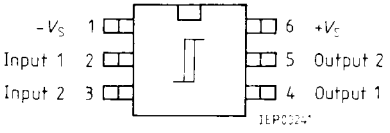


Pin Configuration
(top view)



Test Circuit

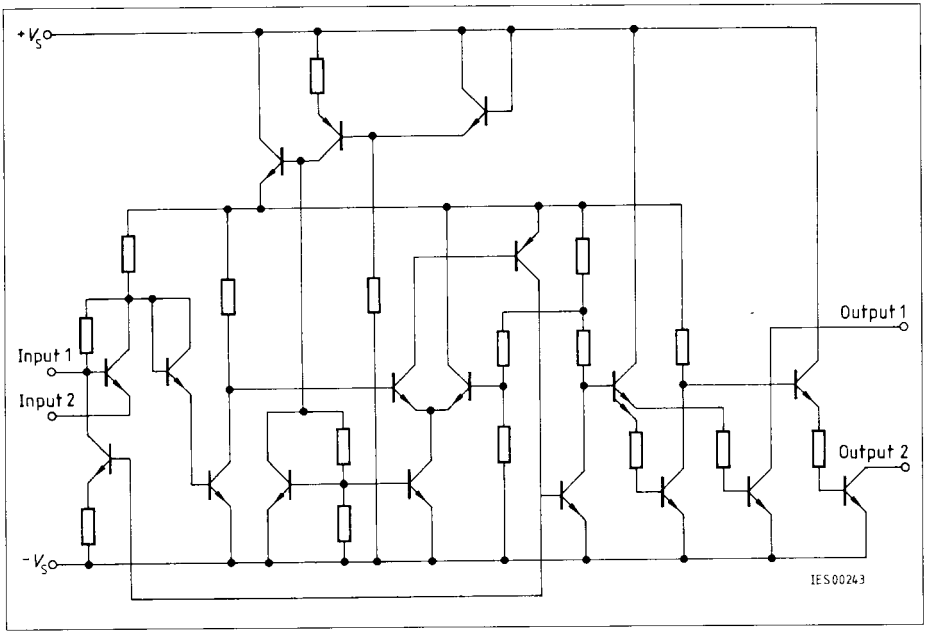


Circuit Diagram

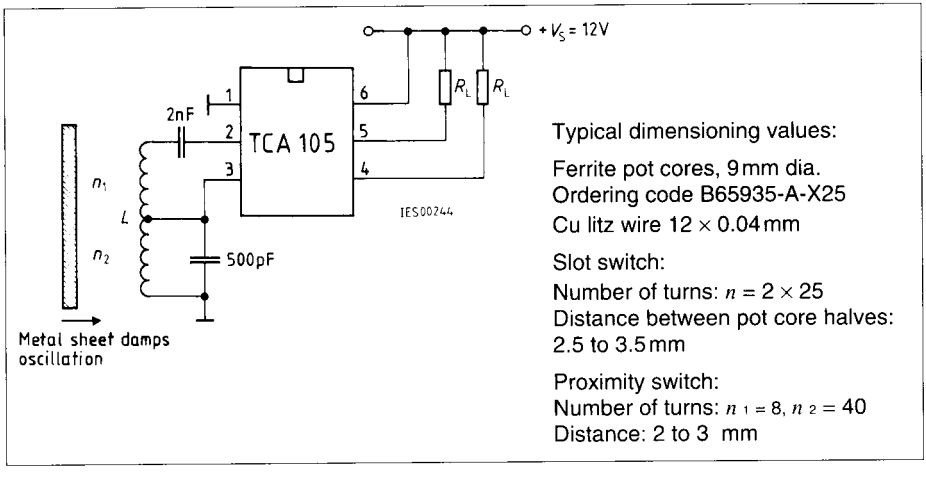


Application Example
Inductive Slot Switch or Proximity Switch

Applications Examples

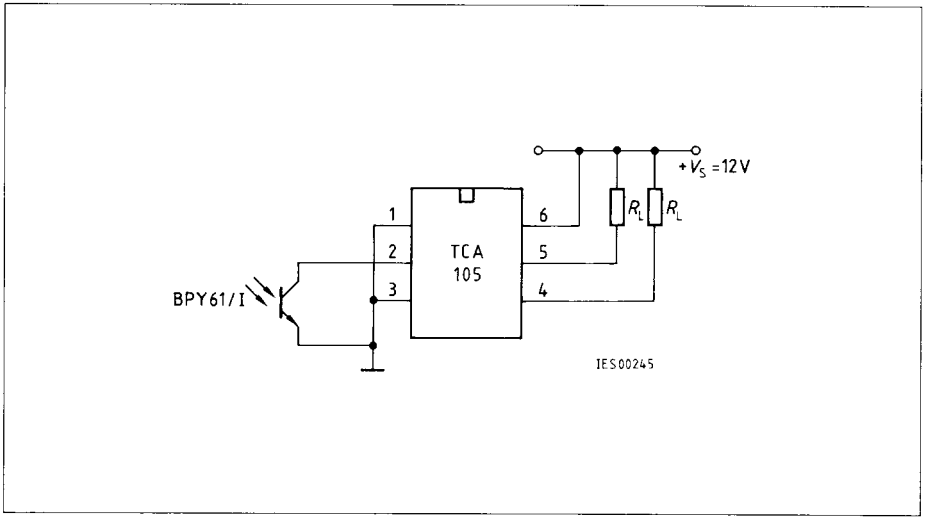

Light-Operated Switch (switching amplifier for phototransistor BPY 61)

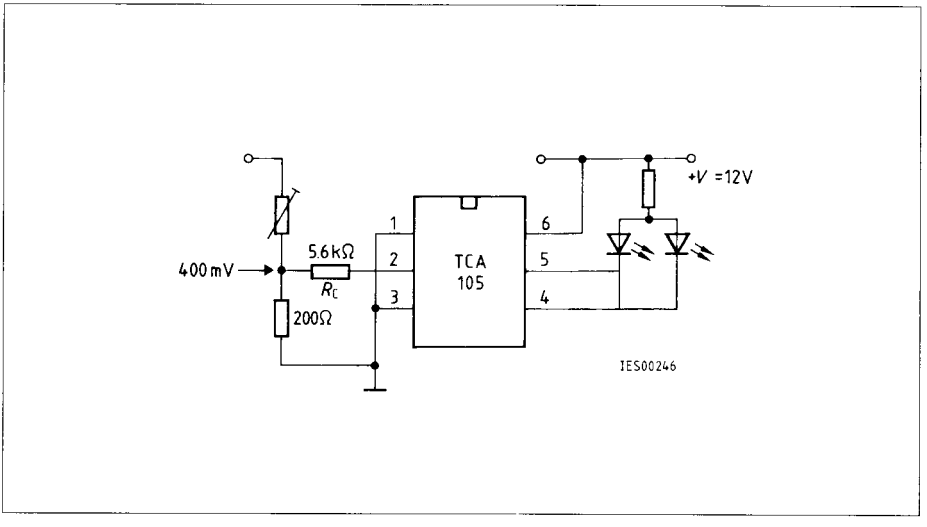

Voltage Monitor

Absolute Maximum Ratings

Parameters	Symbol	Limit Values		Unit
		TCA 105	TCA 105 B	
Supply voltage	V_S	30	20	V
Output voltage (pin 4, pin 5)	V_Q	30	20	V
Output current	I_Q	50	50	mA
Switching frequency	f_S	40	40	kHz
Input voltage	V_I	≥ 0 [1]	≥ 0 [1]	V
Junction temperature	T_j	150	150	°C
Storage temperature range	T_{stg}	– 55 to 125	– 55 to 125	°C
Thermal resistance (system – air)				
TCA 105, TCA 105 B	$R_{th\,SA}$	115	115	K/W
TCA 105 G	$R_{th\,SA}$	200		K/W

Operating Range

Supply voltage	V_S	4.75 to 30	4.75 to 20	V
Ambient temperature	T_A	– 25 to 85	– 25 to 85	°C
Oscillating frequency	f_{OSC}	1 to 4.5	1 to 4.5	MHz

[1] Negative input voltages are not permitted

Characteristics


Static measurement, pins 3 and 1 interconnected

V_S = 12 V, T_A = 25 °C, R_C = 5.6 kΩ

Parameters	Symbol	Limit Values			Unit
		min.	typ.	max.	
Supply current	I_S		3.4	5	mA
Input threshold voltage with compensation resistor R_C	V_I	300	400	480	mV
Input threshold current	I_I		– 60		µA
Hysteresis	V_{hy}	20	35	50	mV
L-output voltage I_Q = 16 mA	V_{QL}		0.25	0.35	V
H-output voltage	V_{QH}	corresponds to V_S			
Reverse current, V_S = 30 V and/or 20 V	I_{QH}			60	µA
L-output voltage I_Q = 50 mA	V_{QL}		0.7	1.15	V
Switching time in TTL operation I_Q = 16 mA	t		3		µs


Current Consumption
Supply Current versus
Supply Voltage

$T_A = 25\ ^\circ C$; $R_L = \infty$

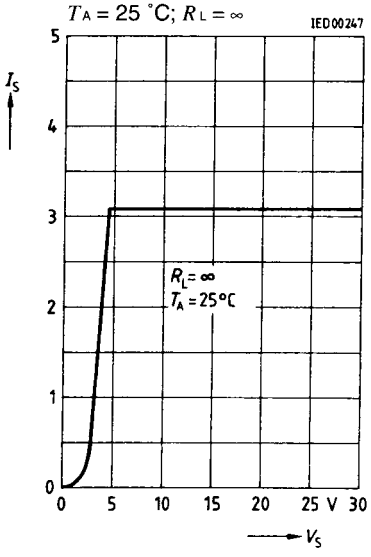


L-Output Voltage versus
Output Current

$T_A = 25\ ^\circ C$; $V_S = 12$ V

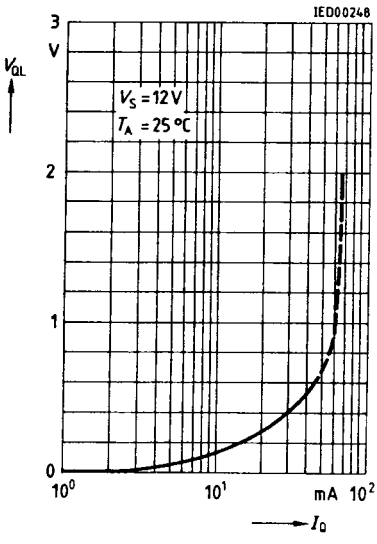


Switching Threshold
Input Voltage versus
Ambient Temperature

$V_S = 12$ V; $R_C = 0$

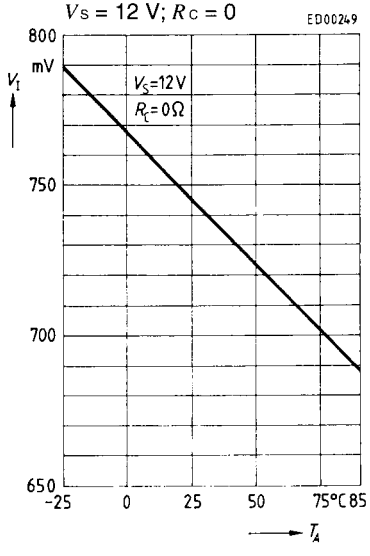


Input Current versus
Ambient Temperature

$V_S = 12$ V; $R_C = 5.6$ kΩ

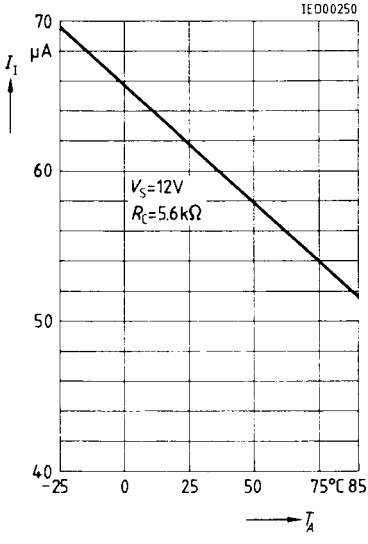


Switching Threshold Input Voltage versus Ambient Temperature

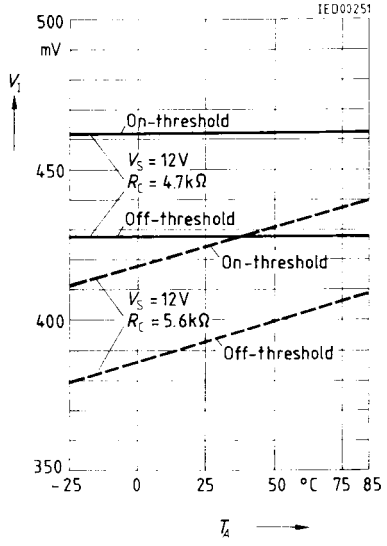

Switching Threshold Input Voltage versus Supply Voltage

T_A = 25 °C; R_C = 5.6 kΩ

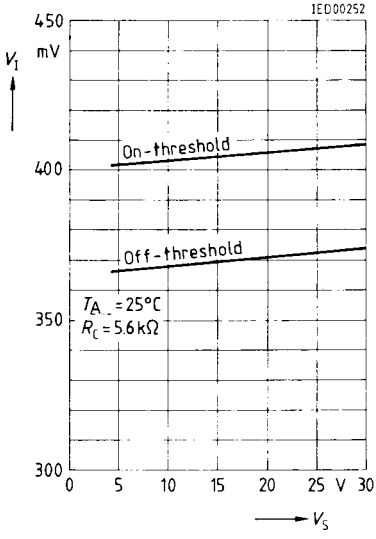

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.