
N-Channel 60-V (D-S), 175°C MOSFET

PRODUCT SUMMARY		
$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
60	0.018	60

175°C Rated
Maximum Junction Temperature
TrenchFET®
Power MOSFETs

TO-220AB




Top View

SUP60N06-18


DRAIN connected to TAB

TO-263



Top View

SUB60N06-18

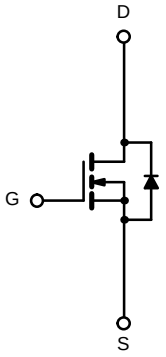

N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS (T_C = 25°C UNLESS OTHERWISE NOTED)				
Parameter		**Symbol**	**Limit**	**Unit**
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current (T_J = 175°C)	T_C = 25°C	I_D	60	A
	T_C = 100°C		39	
Pulsed Drain Current		I_{DM}	120	
Avalanche Current		I_{AR}	60	
Repetitive Avalanche Energy[a]	L = 0.1 mH	E_{AR}	180	mJ
Power Dissipation	T_C = 25°C (TO-220AB and TO-263)	P_D	120[b]	W
	T_A = 25°C (TO-263)[c]		3.7	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	–55 to 175	°C

THERMAL RESISTANCE RATINGS				
Parameter		**Symbol**	**Limit**	**Unit**
Junction-to-Ambient	PCB Mount (TO-263)[c]	R_{thJA}	40	°C/W
	Free Air (TO-220AB)		62.5	
Junction-to-Case		R_{thJC}	1.25	

Notes:
a. Duty cycle ≤ 1%.
b. See SOA curve for voltage derating.
c. When mounted on 1" square PCB (FR-4 material).

For SPICE model information via the Worldwide Web: http://www.vishay.com/www/product/spice.htm


SPECIFICATIONS (T_J = 25°C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 µA	60			V
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_{DS} = 1 mA	2.0		4.0	
Gate-Body Leakage	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 60 V, V_{GS} = 0 V			1	µA
		V_{DS} = 60 V, V_{GS} = 0 V, T_J = 125°C			50	
		V_{DS} = 60 V, V_{GS} = 0 V, T_J = 175°C			150	
On-State Drain Current[a]	$I_{D(on)}$	V_{DS} = 5 V, V_{GS} = 10 V	60			A
Drain-Source On-State Resistance[a]	$r_{DS(on)}$	V_{GS} = 10 V, I_D = 30 A		0.014	0.018	Ω
		V_{GS} = 10 V, I_D = 30 A, T_J = 125°C		0.024	0.030	
		V_{GS} = 10 V, I_D = 30 A, T_J = 175°C		0.031	0.036	
Forward Transconductance[a]	g_{fs}	V_{DS} = 15 V, I_D = 30 A		49		S
Dynamic[b]						
Input Capacitance	C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		2000		pF
Output Capacitance	C_{oss}			400		
Reversen Transfer Capacitance	C_{rss}			115		
Total Gate Charge[c]	Q_g	V_{DS} = 30 V, V_{GS} = 10 V, I_D = 60 A		39	60	nC
Gate-Source Charge[c]	Q_{gs}			12		
Gate-Drain Charge[c]	Q_{gd}			10		
Turn-On Delay Time[c]	$t_{d(on)}$	V_{DD} = 30 V, R_L = 0.5 Ω I_D ≃ 60 A, V_{GEN} = 10 V, R_G = 2.5 Ω		12	30	ns
Rise Time[c]	t_r			11	30	
Turn-Off Delay Time[c]	$t_{d(off)}$			25	50	
Fall Time[c]	t_f			15	30	
Source-Drain Diode Ratings and Characteristics (T_C = 25°C)[b]						
Continuous Current	I_S				60	A
Pulsed Current	I_{SM}				120	
Forward Voltage[a]	V_{SD}	I_F = 60 A, V_{GS} = 0 V			1.6	V
Reverse Recovery Time	t_{rr}	I_F = 60 A, di/dt = 100 A/µs		60		ns
Peak Reverse Recovery Current	$I_{RM(REC)}$			6.0		A
Reverse Recovery Charge	Q_{rr}			0.4		µC


Notes:
a. Pulse test; pulse width ≤ 300 µs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.
c. Independent of operating temperature.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Output Characteristics

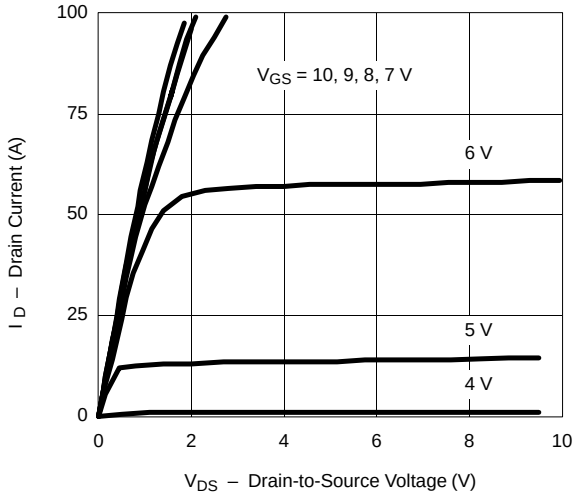


Transfer Characteristics

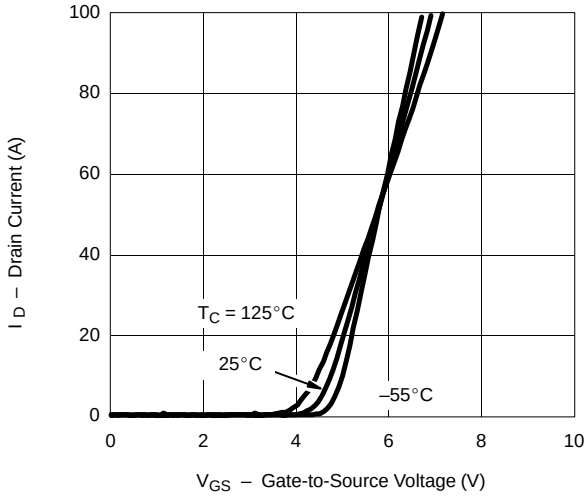


Transconductance

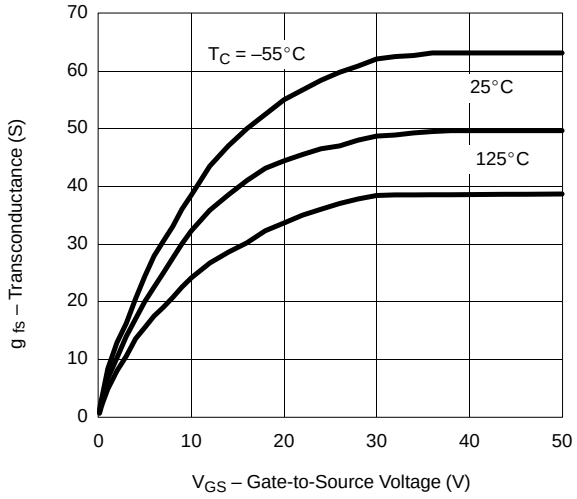


On-Resistance vs. Drain Current

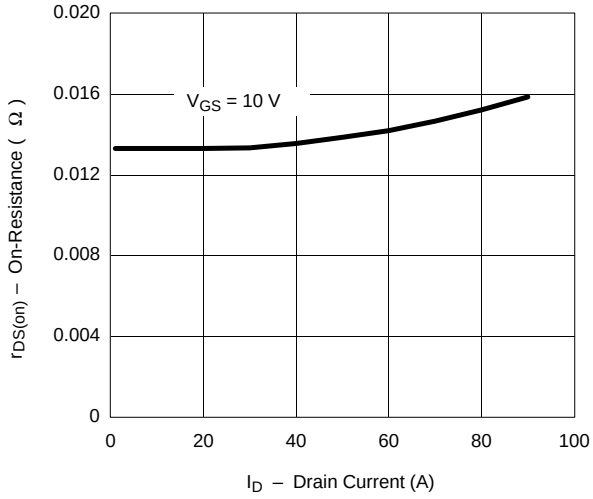

Capacitance

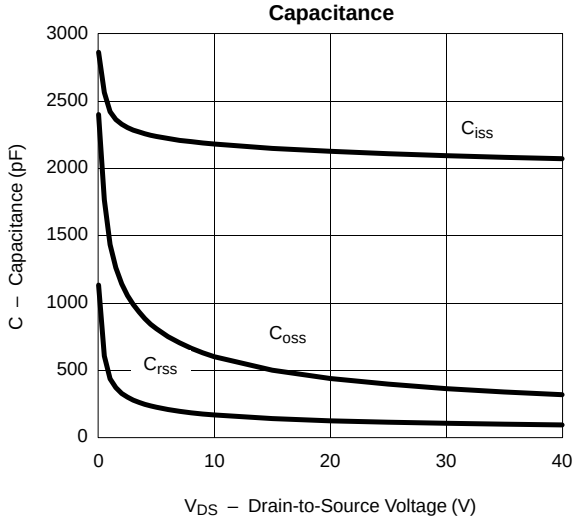


Gate Charge

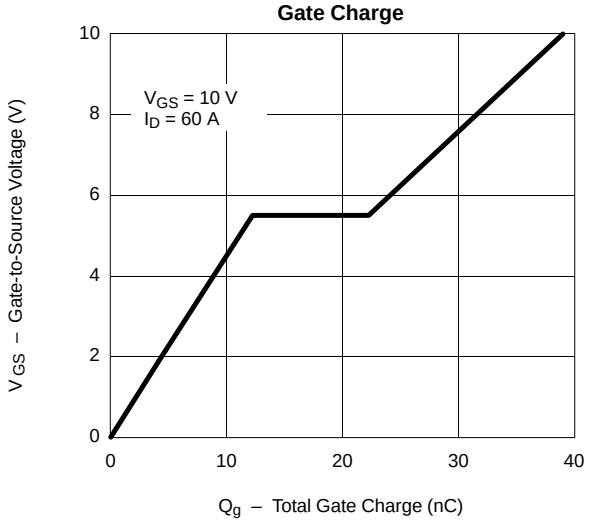


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

On-Resistance vs. Junction Temperature

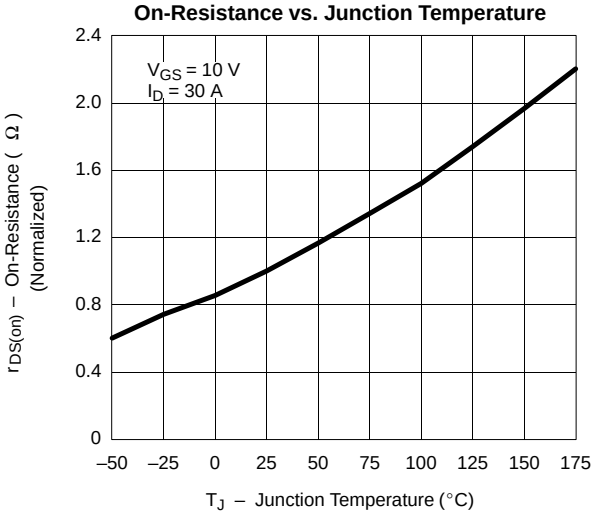


Source-Drain Diode Forward Voltage

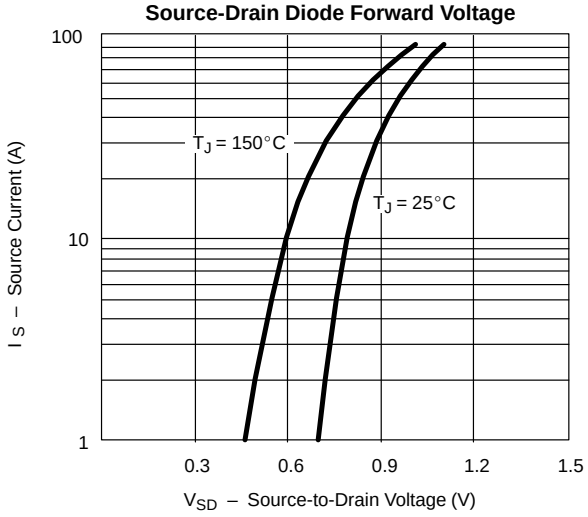


THERMAL RATINGS


Maximum Avalanche and Drain Current vs. Case Temperature

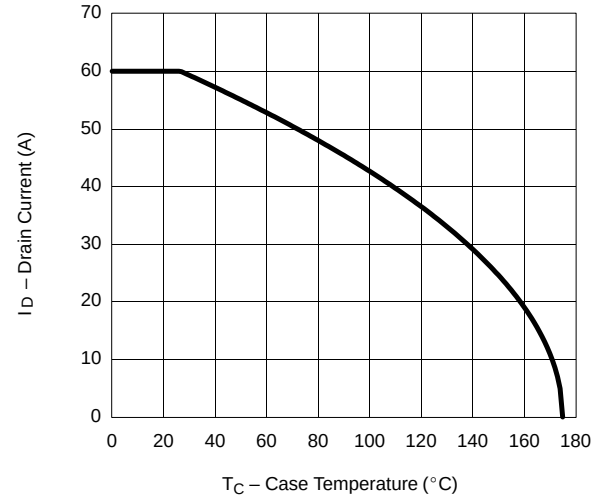

Safe Operating Area

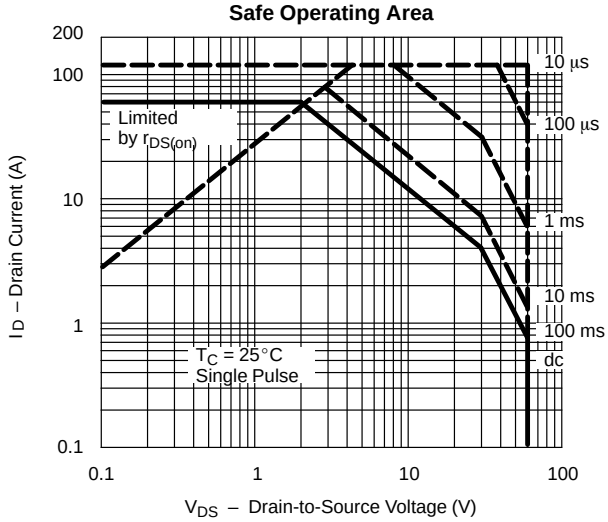

Normalized Thermal Transient Impedance, Junction-to-Case

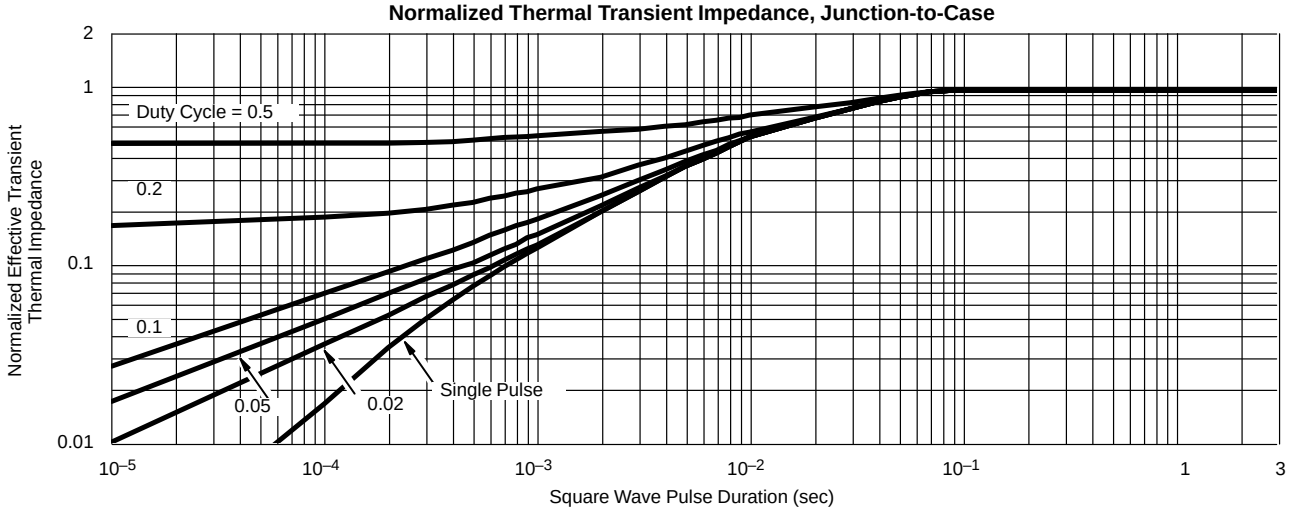

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

SUP60N06-18-E3 SUB60N06-18-E3 SUP60N06-18 SUB60N06-18

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.