BC638, BC640, BC640-16

High Current Transistors


PNP Silicon


Features

- Pb−Free Packages are Available*

ON Semiconductor®

http://onsemi.com





TO−92
CASE 29
STYLE 14

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage BC638 BC640	V_{CEO}	 −60 −80	Vdc
Collector-Base Voltage BC638 BC640	V_{CBO}	 −60 −80	Vdc
Emitter-Base Voltage	V_{EBO}	−5.0	Vdc
Collector Current − Continuous	I_C	−0.5	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	 625 5.0	 mW mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	 1.5 12	 W mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to +150	°C


Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction−to−Case	$R_{\theta JC}$	83.3	°C/W

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MARKING DIAGRAMS

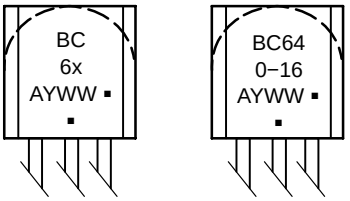

BC6x = Device Code
x = 3 or 4
BC640−16 = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
▪ = Pb−Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

© Semiconductor Components Industries, LLC, 2005

ORDERING INFORMATION

Device	Package	Shipping
BC638	TO−92	5000 Units / Box
BC638G	TO−92 (Pb−Free)	5000 Units / Box
BC638ZL1	TO−92	2000 Units / Ammo Box
BC638ZL1G	TO−92 (Pb−Free)	2000 Units / Ammo Box
BC640	TO−92	5000 Units / Box
BC640G	TO−92 (Pb−Free)	5000 Units / Box
BC640ZL1	TO−92	2000 Units / Ammo Box
BC640ZL1G	TO−92 (Pb−Free)	2000 Units / Ammo Box
BC640−16	TO−92	5000 Units / Box
BC640−16G	TO−92 (Pb−Free)	5000 Units / Box

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector − Emitter Breakdown Voltage (I_C = −10 mAdc, I_B = 0)	BC638	$V_{(BR)CEO}$	−60	−	−	Vdc
	BC640		−80	−	−	
Collector − Base Breakdown Voltage (I_C = −100 μAdc, I_E = 0)	BC638	$V_{(BR)CBO}$	−60	−	−	Vdc
	BC640		−80	−	−	
Emitter − Base Breakdown Voltage (I_E = −10 μAdc, I_C = 0)		$V_{(BR)EBO}$	−5.0	−	−	Vdc
Collector Cutoff Current (V_{CB} = −30 Vdc, I_E = 0)		I_{CBO}	−	−	−100	nAdc
(V_{CB} = −30 Vdc, I_E = 0, T_A = 125°C)			−	−	−10	μAdc
ON CHARACTERISTICS (Note 1)						
DC Current Gain (I_C = −5.0 mAdc, V_{CE} = −2.0 Vdc)		h_{FE}	25	−	−	−
(I_C = −150 mAdc, V_{CE} = −2.0 Vdc)	BC638		40	−	160	
	BC640		40	−	160	
	BC640−16		100	−	250	
(I_C = −500 mA, V_{CE} = −2.0 V)			25	−	−	
Collector − Emitter Saturation Voltage (I_C = −500 mAdc, I_B = −50 mAdc)		$V_{CE(sat)}$	−	−0.25	−0.5	Vdc
			−	−0.5	−	
Base − Emitter On Voltage (I_C = −500 mAdc, V_{CE} = −2.0 Vdc)		$V_{BE(on)}$	−	−	−1.0	Vdc
DYNAMIC CHARACTERISTICS						
Current Gain − Bandwidth Product (I_C = −50 mAdc, V_{CE} = −2.0 Vdc, f = 100 MHz)		f_T	−	150	−	MHz
Output Capacitance (V_{CB} = −10 Vdc, I_E = 0, f = 1.0 MHz)		C_{ob}	−	9.0	−	pF
Input Capacitance (V_{EB} = −0.5 Vdc, I_C = 0, f = 1.0 MHz)		C_{ib}	−	110	−	pF

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle 2.0%.

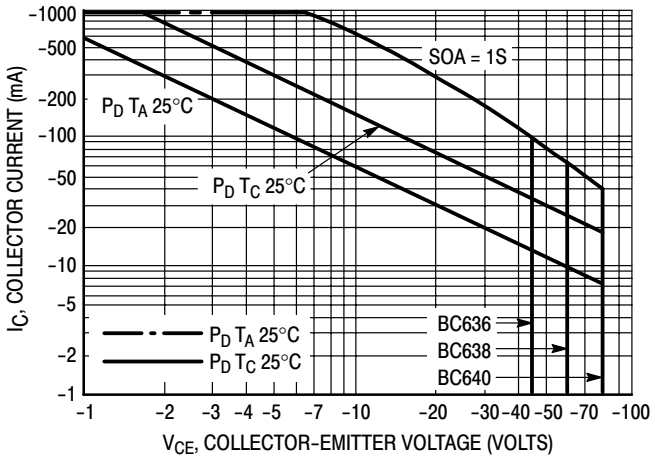


Figure 1. Active Region Safe Operating Area

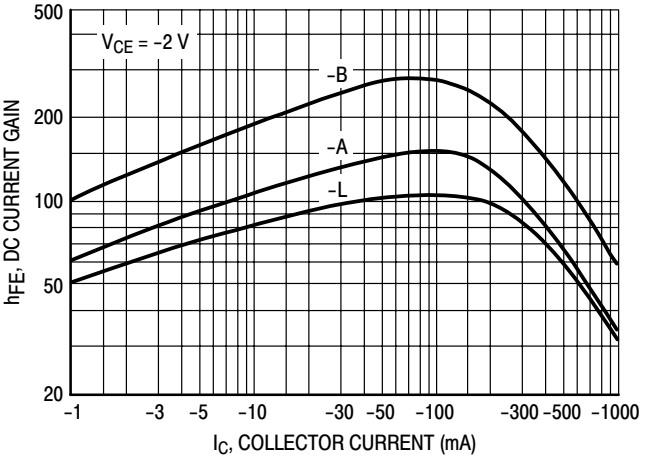


Figure 2. DC Current Gain

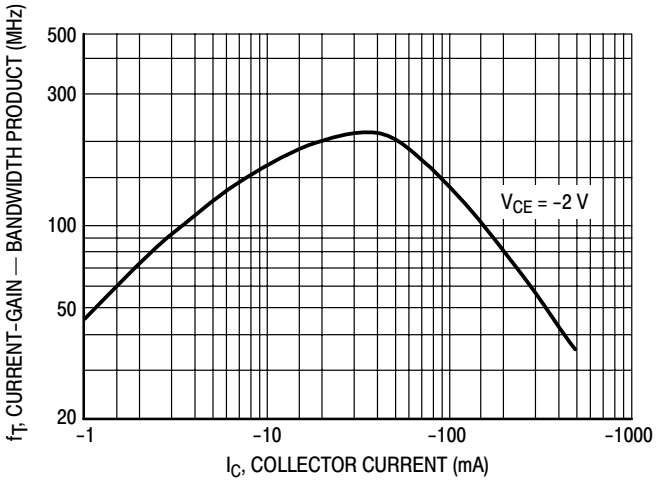


Figure 3. Current Gain Bandwidth Product

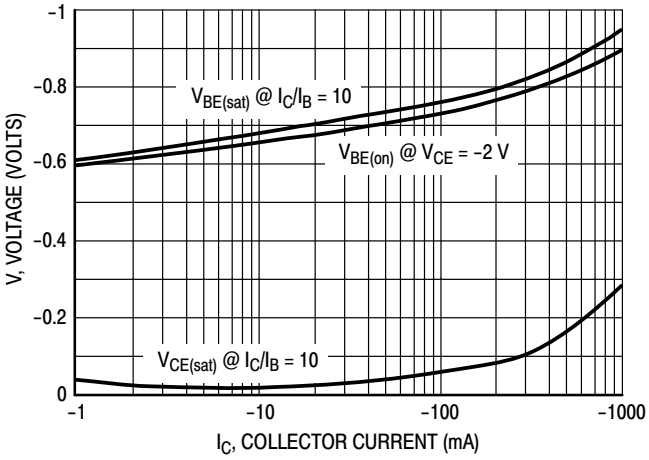


Figure 4. “Saturation” and “On” Voltages


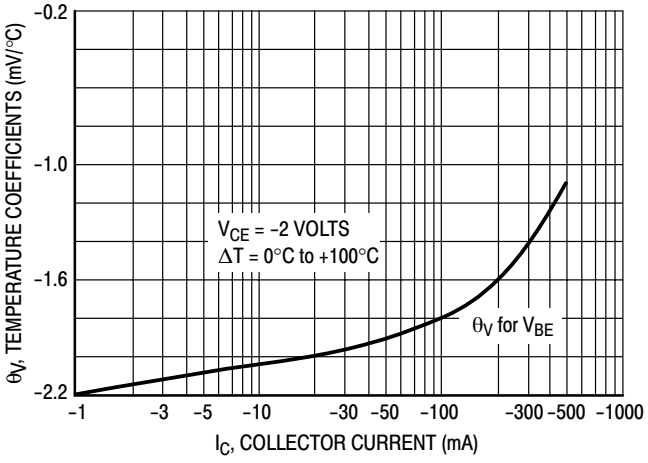


Figure 5. Temperature Coefficients

PACKAGE DIMENSIONS

TO−92 (TO−226)
CASE 29−11
ISSUE AL

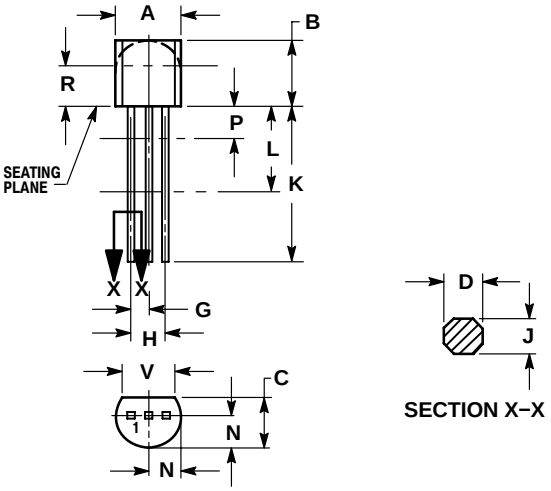

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	---	12.70	---
L	0.250	---	6.35	---
N	0.080	0.105	2.04	2.66
P	---	0.100	---	2.54
R	0.115	---	2.93	---
V	0.135	---	3.43	---

STYLE 14:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082−1312 USA
Phone: 480−829−7710 or 800−344−3860 Toll Free USA/Canada
Fax: 480−829−7709 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2−9−1 Kamimeguro, Meguro−ku, Tokyo, Japan 153−0051
Phone: 81−3−5773−3850

ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.