VN10KM ■ VN2222KM


Siliconix

N-Channel Enhancement Mode
MOSPOWER

APPLICATIONS
- Switching Regulators
- Converters
- Motor Drivers

PIN 1 – Source
PIN 2 – Gate
PIN 3 & TAB – Drain

TO–237



PRODUCT SUMMARY

Part Number	BV_{DSS} Volts	$r_{DS(ON)}$ (ohms)	Package
VN10KM	60	5	TO–237
VN2222KM	60	7.5	TO–237


For Additional Curves
See Section 5: VNMK06

ABSOLUTE MAXIMUM RATINGS (T_C = 25° C unless otherwise noted)

	Parameter	VN10KM	VN2222KM	Units
V_{DS}	Drain-Source Voltage	60	60	V
V_{DGR}	Drain-Gate Voltage (R_{GS} = 1 MΩ)	60	60	V
I_D @ T_C = 25° C	Continuous Drain Current	±0.3	±0.25	A
I_D @ T_C = 100° C	Continuous Drain Current	±0.2	±0.16	A
I_{DM}	Pulsed Drain Current[1]	±1	±1	A
V_{GS}	Gate-Source Voltage	+15, −0.3	+15, −0.3	V
P_D	Max Continuous Power Dissipation	1	1	
P_D	Max Pulse[2] Power Dissipation	3.9	3.9	W
Junction to Case	Linear Derating Factor	0.031	0.031	W/° C
Junction to Ambient	Linear Derating Factor	0.008	0.008	W/° C
T_J Tstg	Operating and Storage Temperature Range	−55 To +150	−55 To +150	° C
Lead Temperature	(1/16" from case for 10 secs.)	300	300	° C

1 **Pulse Test:** Pulsewidth ≤ 300μsec, Duty Cycle ≤ 2%
2 1 Sec Continuous Power Single Pulse

Power Derating

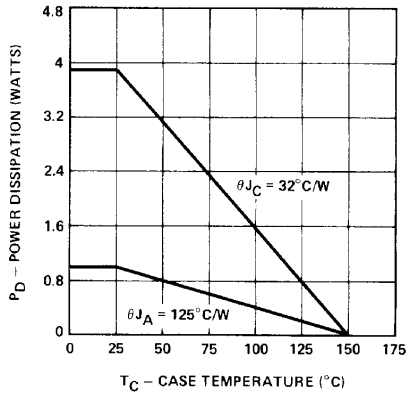

ELECTRICAL CHARACTERISTICS (T_C = 25° C unless otherwise noted)

STATIC

Parameter		Type	Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS}	Drain-Source Breakdown Voltage	All	60	120		V	V_{GS} = 0 I_D = 100 μA
$V_{GS(th)}$	Gate-Threshold Voltage	VN10KM VN2222KM	0.8 0.6	1.5 1.5	2.5 2.5	V	V_{DS} = V_{GS}, I_D = 1 mA
I_{GSSF}	Gate-Body Leakage Forward	All		1	100	nA	V_{GS} = 15V, V_{DS} = 0
I_{DSS}	Zero Gate Voltage Drain Current	All		0.1	10	μA	V_{DS} = 45V , V_{GS} = 0
$I_{D(on)}$	On-State Drain Current[1]	All	0.75	1.5		A	$V_{DS} \geq 2V_{DS(ON)}$, V_{GS} = 10V
$V_{DS(on)}$	Static Drain-Source On-State Voltage[1]	All		1.2	1.5	V	V_{GS} = 5V , I_D = 0.2A
		VN10KM VN2222KM		2 3	2.5 3.75	V	V_{GS} = 10V , I_D = 0.5A
$R_{DS(on)}$	Static Drain-Source On-State Resistance[1]	All		6	7.5	Ω	V_{GS} = 5V , I_D = 0.2A
		VN10KM VN2222KM		4 6	5 7.5	Ω	V_{GS} = 10V , I_D = 0.5A
$R_{DS(on)}$	Static Drain-Source On-State Resistance[1]	VN10KM		7.2	9	Ω	V_{GS} = 10V, I_D = 0.5A, T_C = 125° C
		VN2222KM		10.8	13.5	Ω	V_{GS}=10V, I_D=0.5A, T_C=125° C


DYNAMIC

g_{fs}	Forward Transductance[1]	All	100	200		mS	$V_{DS} \geq 2V_{DS(ON)}$, I_D = 0.5A
C_{iss}	Input Capacitance	All		40	60	pF	V_{GS} = 0 , V_{DS} = 25V f = 1 MHz
C_{oss}	Output Capacitance	All		17	25	pF	
C_{rss}	Reverse Transfer Capacitance	All		3	5	pF	
t_{ON}	Turn-On Time ime	All		7	10	ns	V_{DD} = 15V , $I_D \cong$ 0.6A R_g = 25Ω , R_L = 23Ω (MOSFET switching times are essentially independent of operating temperature.)
						ns	
t_{OFF}	Turn-Off Time Time	All		7	10	ns	
						ns	

THERMAL RESISTANCE

R_{thJC}	Junction-to-Case	All		26	32	°C/W	
R_{thJA}	Junction-to-Ambient	All			125	°C/W	Free Air Operation

BODY-DRAIN DIODE RATINGS AND CHARACTERISTICS

I_S	Continuous Source Current (Body Diode)	VN10KM			−0.3	A	Modified MOSPOWER symbol showing the integral P-N Junction rectifier 
		VN2222KM			−0.25	A	
I_{SM}	Source Current[1] (Body Diode)	All			−1	A	
V_{SD}	Diode Forward Voltage[1]	VN10KM		−0.85		V	T_C=25° C, I_S=−0.3A, V_{GS} = 0
		VN2222KM		−0.85		V	T_C=25° C, I_S=−0.25A, V_{GS} = 0

1 **Pulse Test:** Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%

Data Sheet Curves: VNMK06

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.