FAIRCHILD SEMICONDUCTOR®

June 2006

FDS8962C
Dual N & P-Channel PowerTrench® MOSFET

Features

- **Q1:** N-Channel
  7.0A, 30V $R_{DS(on)}$ = 0.030Ω @ V_{GS} = 10V
  $R_{DS(on)}$ = 0.044Ω @ V_{GS} = 4.5V
- **Q2:** P-Channel
  -5A, -30V $R_{DS(on)}$ = 0.052Ω @ V_{GS} = -10V
  $R_{DS(on)}$ = 0.080Ω @ V_{GS} = -4.5V
- Fast switching speed
- High power and handling capability in a widely used surface mount package

General Description

These dual N- and P-Channel enhancement mode power field effect transistors are produced using Fairchild Semiconductor's advanced PowerTrench process that has been especially tailored to minimize on-state ressitance and yet maintain superior switching performance.

These devices are well suited for low voltage and battery powered applications where low in-line power loss and fast switching are required.





Absolute Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter		Q1	Q2	Units
V_{DSS}	Drain-Source Voltage		30	-30	V
V_{GSS}	Gate-Source Voltage		±20	±20	V
I_D	Drain Current – Continuous	(Note 1a)	7	-5	A
	– Pulsed		20	-20	
P_D	Power Dissipation for Dual Operation		2		W
	Power Dissipation for Single Operation	(Note 1a)	1.6		
		(Note 1b)	1		
		(Note 1c)	0.9		
T_J, T_{STG}	Operating and Storage Junction Temperature Range		-55 to +150		°C
Thermal Characteristics					
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	78		°C/W
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	40		°C/W

Package Marking and Ordering Information

Device Marking	Device	Reel Size	Tape width	Quantity
FDS8962C	FDS8962C	13”	12mm	2500 units

©2005 Fairchild Semiconductor Corporation

Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Units
Off Characteristics							
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS} = 0 V, I_D = 250 μA V_{GS} = 0 V, I_D = -250 μA	Q1 Q2	30 -30			V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C I_D = -250 μA, Referenced to 25°C	Q1 Q2		25 -23		mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 24 V, V_{GS} = 0 V V_{DS} = -24 V, V_{GS} = 0 V	Q1 Q2			1 -1	μA
I_{GSSF}	Gate-Body Leakage, Forward	V_{GS} = 20 V, V_{DS} = 0 V	All			100	nA
I_{GSSR}	Gate-Body Leakage, Reverse	V_{GS} = -20 V, V_{DS} = 0 V	All			-100	nA
On Characteristics (Note 2)							
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250 μA V_{DS} = V_{GS}, I_D = -250 μA	Q1 Q2	1 -1	1.9 -1.7	3 -3	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C I_D = -250 μA, Referenced to 25°C	Q1 Q2		-4.5 4.5		mV/°C
$R_{DS(on)}$	Static Drain-Source On-Resistance	V_{GS} = 10 V, I_D = 7 A V_{GS} = 10 V, I_D = 7 A, T_J = 125°C V_{GS} = 4.5 V, I_D = 6 A	Q1		21 29 26	30 46 44	mΩ
		V_{GS} = -10 V, I_D = -5 A V_{GS} = -10 V, I_D = -5 A, T_J = 125°C V_{GS} = -4.5 V, I_D = -4 A	Q2		42 57 65	52 78 80	
$I_{D(on)}$	On-State Drain Current	V_{GS} = 10 V, V_{DS} = 5 V V_{GS} = -10 V, V_{DS} = -5 V	Q1 Q2	20 -20			A
g_{FS}	Forward Transconductance	V_{DS} = 5 V, I_D = 7 A V_{DS} = -5 V, I_D =-5 A	Q1 Q2		25 10		S
Dynamic Characteristics							
C_{iss}	Input Capacitance	Q1 V_{DS} = 15 V, V_{GS} = 0 V, f = 1.0 MHz	Q1 Q2		575 528		pF
C_{oss}	Output Capacitance	Q2 V_{DS} = -15 V, V_{GS} = 0 V, f = 1.0 MHz	Q1 Q2		145 132		pF
C_{rss}	Reverse Transfer Capacitance		Q1 Q2		65 70		pF
R_G	Gate Resistance	V_{GS} = 15 mV, f = 1.0 MHz	Q1 Q2		2.1 6.0		Ω
Switching Characteristics (Note 2)							
$t_{d(on)}$	Turn-On Delay Time	Q1 V_{DD} = 15 V, I_D = 1 A, V_{GS} = 10V, R_{GEN} = 6 Ω Q2 V_{DD} = -15 V, I_D = -1 A, V_{GS} = -10V, R_{GEN} = 6 Ω	Q1 Q2		8 7	16 14	ns
t_r	Turn-On Rise Time		Q1 Q2		5 13	10 24	ns
$t_{d(off)}$	Turn-Off Delay Time		Q1 Q2		23 14	37 25	ns
t_f	Turn-Off Fall Time		Q1 Q2		3 9	6 17	ns
Q_g	Total Gate Charge	Q1 V_{DS} = 15 V, I_D = 7 A, V_{GS} = 10 V Q2 V_{DS} = -15 V, I_D = -5 A,V_{GS} = -10 V	Q1 Q2		10.7 9.6	26 13	nC
Q_{gs}	Gate-Source Charge		Q1 Q2		1.7 2.2		nC
Q_{gd}	Gate-Drain Charge		Q1 Q2		2.1 1.7		nC

Electrical Characteristics T_A = 25°C unless otherwise noted (Continued)

Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Units
Drain–Source Diode Characteristics and Maximum Ratings							
I_S	Maximum Continuous Drain-Source Diode Forward Current		Q1 Q2			1.3 -1.3	A
V_{SD}	Drain-Source Diode Forward Voltage	V_{GS} = 0 V, I_S = 1.3 A (Note 2) V_{GS} = 0 V, I_S = -1.3 A (Note 2)	Q1 Q2		0.75 -0.88	1.2 -1.2	V
t_{rr}	Diode Reverse Recovery Time	Q1 I_F = 7 A, d_{iF}/d_t = 100 A/µs	Q1 Q2		19 19		nS
Q_{rr}	Diode Reverse Recovery Charge	Q2 I_F = -5 A, d_{iF}/d_t = 100 A/µs	Q1 Q2		9 6		nC

Notes:

Notes:

1. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a) 78°/W when mounted on a 0.5 in^2 pad of 2 oz copper



b) 125°/W when mounted on a .02 in^2 pad of 2 oz copper



c) 135°/W when mounted on a minimum pad.

Scale 1 : 1 on letter size paper

2. Pulse Test: Pulse Width < 300µs, Duty Cycle < 2.0%

Typical Characteristics: Q1 (N-Channel)

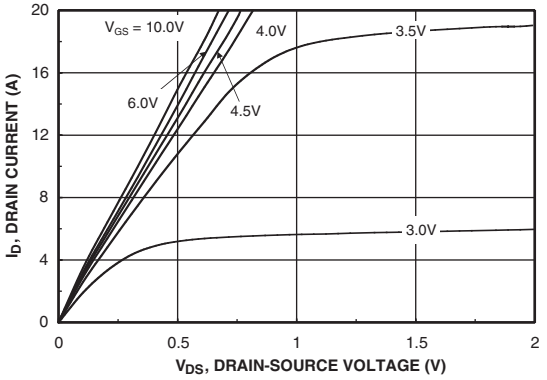

Figure 1. On-Region Characteristics.

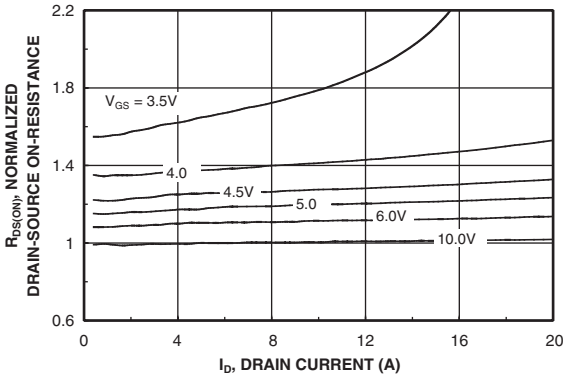

Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

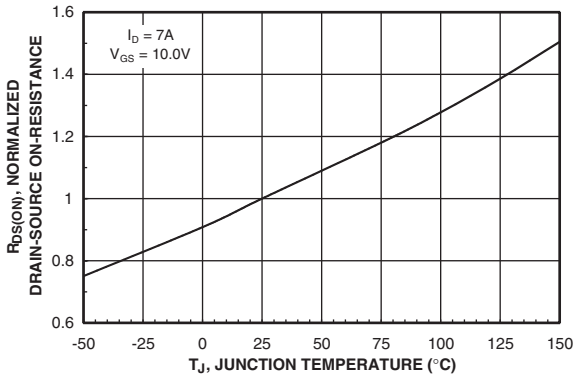

Figure 3. On-Resistance Variation with Temperature.

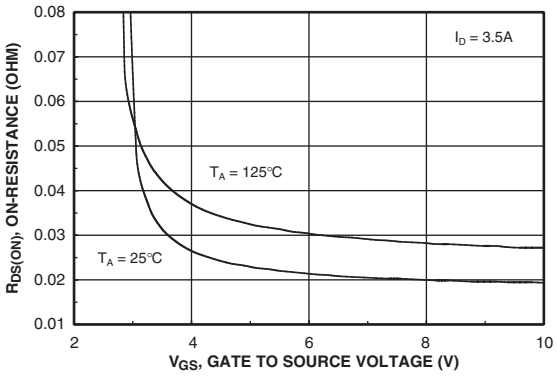

Figure 4. On-Resistance Variation with Gate-to-Source Voltage.

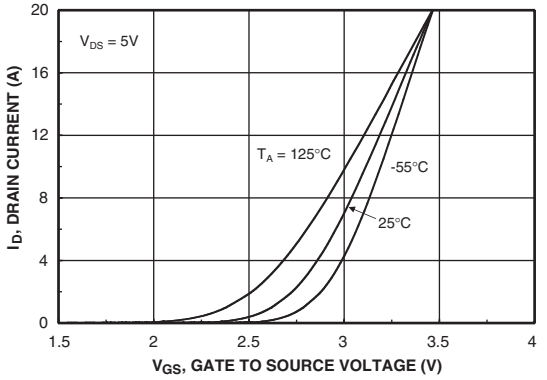

Figure 5. Transfer Characteristics.

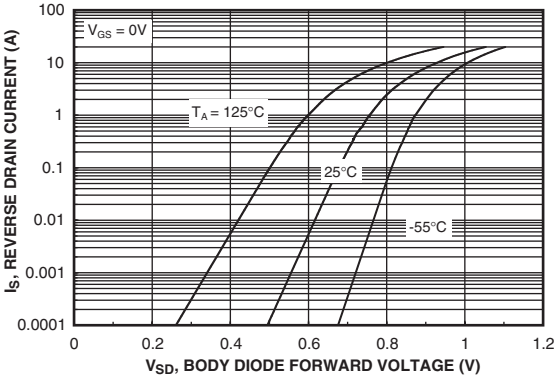

Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics: Q1 (N-Channel)

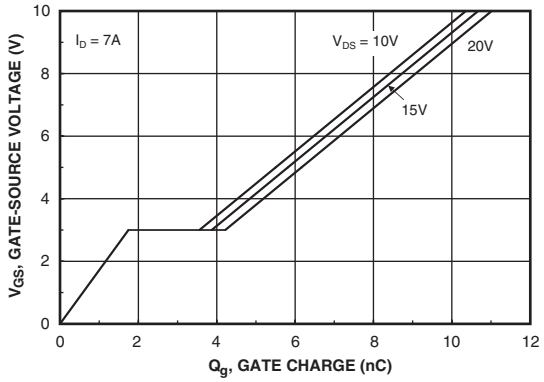

Figure 7. Gate Charge Characteristics.

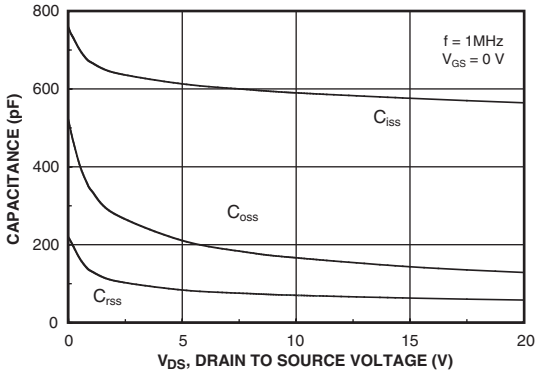

Figure 8. Capacitance Characteristics.

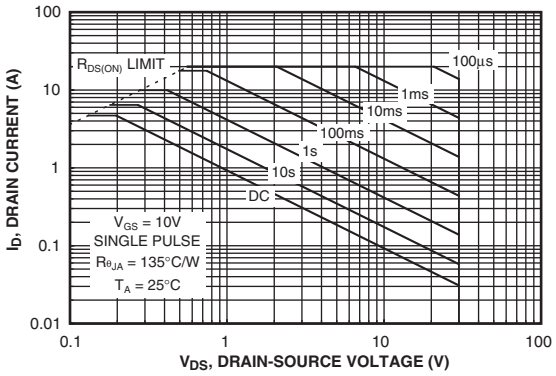

Figure 9. Maximum Safe Operating Area.

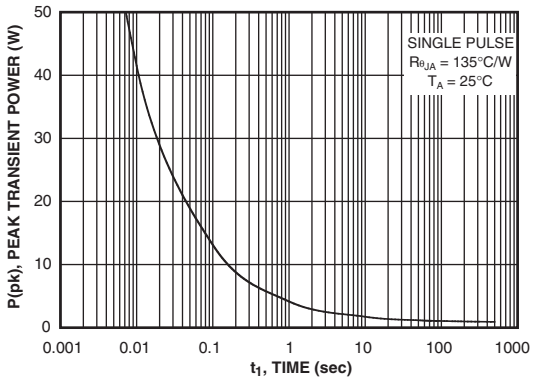

Figure 10. Single Pulse Maximum Power Dissipation.

Typical Characteristics: Q2 (P-Channel)

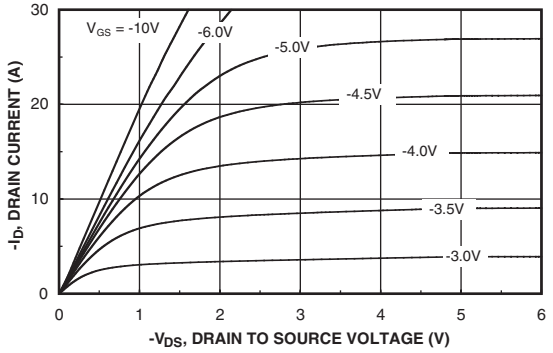

Figure 11. On-Region Characteristics.

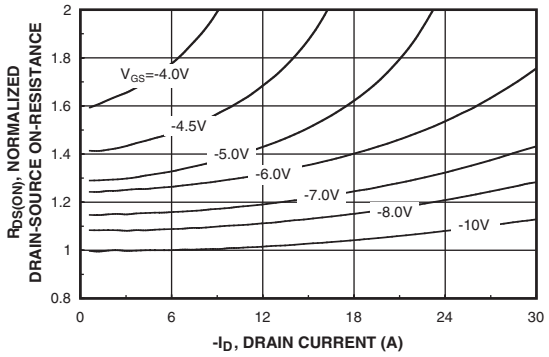

Figure 12. On-Resistance Variation with Drain Current and Gate Voltage.

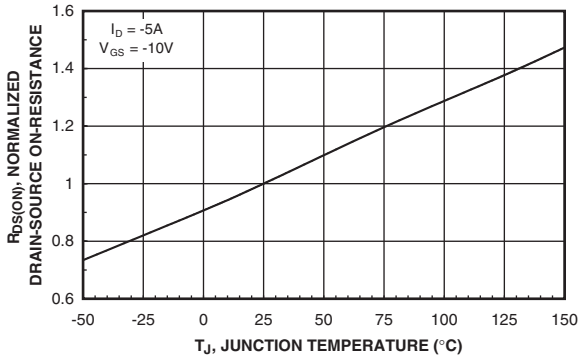

Figure 13. On-Resistance Variation with Temperature.

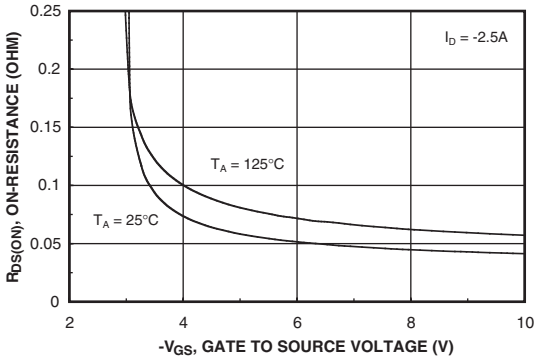

Figure 14. On-Resistance Variation with Gate-to-Source Voltage.

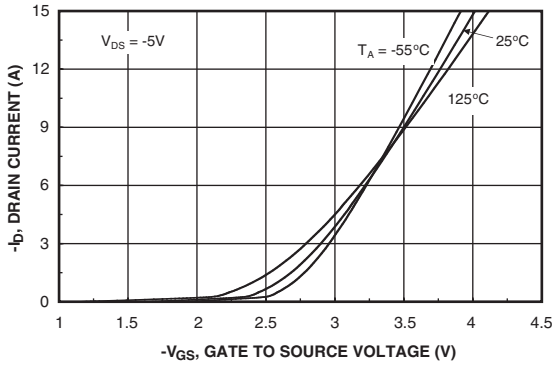

Figure 15. Transfer Characteristics.

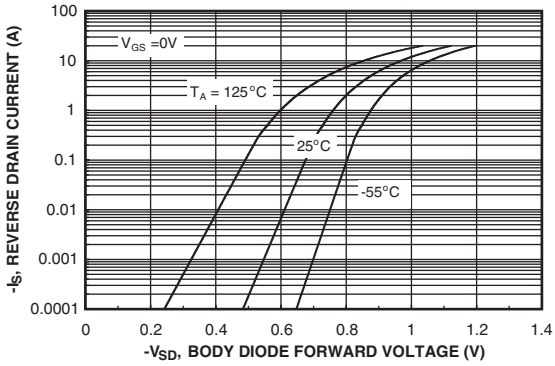

Figure 16. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics: Q2 (P-Channel)

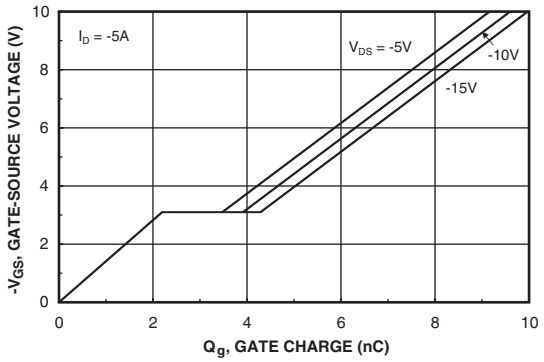

Figure 17. Gate Charge Characteristics.

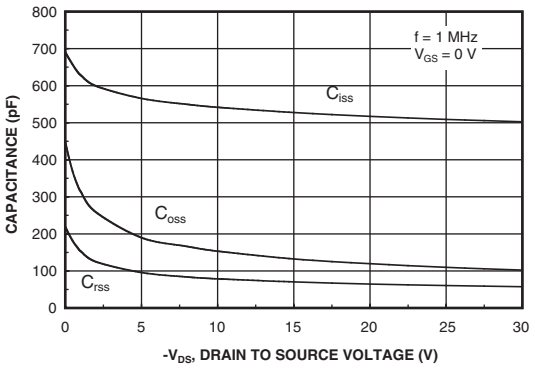

Figure 18. Capacitance Characteristics.

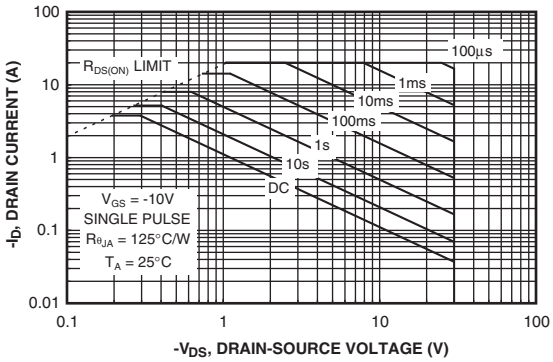

Figure 19. Maximum Safe Operating Area.

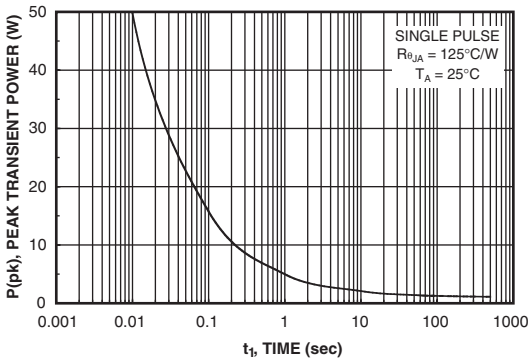

Figure 20. Single Pulse Maximum Power Dissipation.

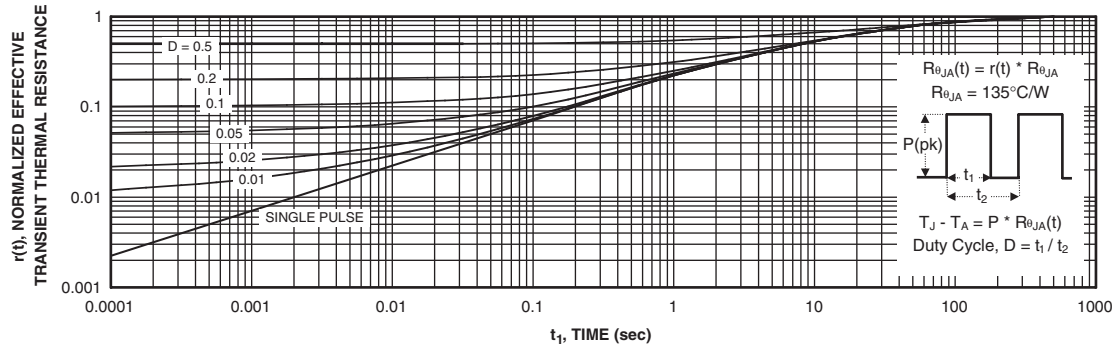

Figure 21. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1c.
Transient thermal response will change depending on the circuit board design.

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST®	ISOPLANAR™	PowerEdge™	SuperFET™
ActiveArray™	FASTr™	LittleFET™	PowerSaver™	SuperSOT™-3
Bottomless™	FPS™	MICROCOUPLER™	PowerTrench®	SuperSOT™-6
Build it Now™	FRFET™	MicroFET™	QFET®	SuperSOT™-8
CoolFET™	GlobalOptoisolator™	MicroPak™	QS™	SyncFET™
CROSSVOLT™	GTO™	MICROWIRE™	QT Optoelectronics™	TCM™
DOME™	HiSeC™	MSX™	Quiet Series™	TinyLogic®
EcoSPARK™	I^2C™	MSXPro™	RapidConfigure™	TINYOPTO™
E^2CMOS™	*i-Lo*™	OCX™	RapidConnect™	TruTranslation™
EnSigna™	ImpliedDisconnect™	OCXPro™	µSerDes™	UHC™
FACT™	IntelliMAX™	OPTOLOGIC®	ScalarPump™	UniFET™
FACT Quiet Series™		OPTOPLANAR™	SILENT SWITCHER®	UltraFET®
Across the board. Around the world.™		PACMAN™	SMART START™	VCX™
The Power Franchise®		POP™	SPM™	Wire™
Programmable Active Droop™		Power247™	Stealth™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.