Bulletin PD-20561 rev. F 06/06

International
IOR Rectifier

8TQ...
8TQ...S

SCHOTTKY RECTIFIER

8 Amp

$I_{F(AV)}$ = 8 Amp
V_R = 80 - 100V

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	8	A
V_{RRM} range	80 - 100	V
I_{FSM} @tp = 5 µs sine	850	A
V_F @8 Apk, T_J = 125°C	0.58	V
T_J range	- 55 to 175	°C


Description/ Features


The 8TQ.. Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175° C T_J operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

8TQ...






TO-220

8TQ... S





D^2PAK

Voltage Ratings

	Part number	8TQ080	8TQ100
V_R	Max. DC Reverse Voltage (V)	80	100
V_{RWM}	Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

	Parameters	8TQ	Units	Conditions	
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	8	A	50% duty cycle @ T_C = 157° C, rectangular wave form	
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	850	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied
		230		10ms Sine or 6ms Rect. pulse	
E_{AS}	Non-Repetitive Avalanche Energy	7.50	mJ	T_J = 25 °C, I_{AS} = 0.50 Amps, L = 60 mH	
I_{AR}	Repetitive Avalanche Current	0.50	A	Current decaying linearly to zero in 1 µsec Frequency limited by T_J max. V_A = 1.5 x V_R typical	

Electrical Specifications

	Parameters	8TQ	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop (1) * See Fig. 1	0.72	V	@ 8A	T_J = 25 °C
		0.88	V	@ 16A	
		0.58	V	@ 8A	T_J = 125 °C
		0.69	V	@ 16A	
I_{RM}	Max. Reverse Leakage Current (1) * See Fig. 2	0.55	mA	T_J = 25 °C	V_R = rated V_R
		7	mA	T_J = 125 °C	
C_T	Max. Junction Capacitance	500	pF	V_R = 5V_{DC} (test signal range 100Khz to 1Mhz) 25 °C	
L_S	Typical Series Inductance	8	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V_R)	10000	V/ µs		

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

	Parameters		8TQ	Units	Conditions
T_J	Max. Junction Temperature Range		-55 to 175	°C	
T_{stg}	Max. Storage Temperature Range		-55 to 175	°C	
R_{thJC}	Max. Thermal Resistance Junction to Case		2.0	°C/W	DC operation * See Fig. 4
R_{thCS}	Typical Thermal Resistance, Case to Heatsink		0.50	°C/W	Mounting surface, smooth and greased
wt	Approximate Weight		2(0.07)	g(oz.)	
T	Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)	
		Max.	12(10)		
	Marking Device		8TQ100		Case Style TO-220
			8TQ100S		Case Style D^2Pak

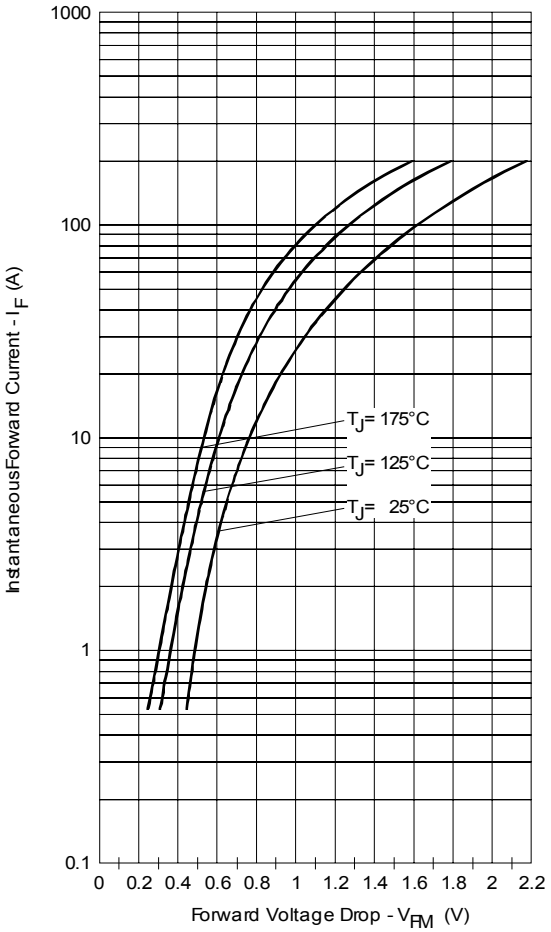


Fig. 1 - Maximum Forward Voltage Drop Characteristics

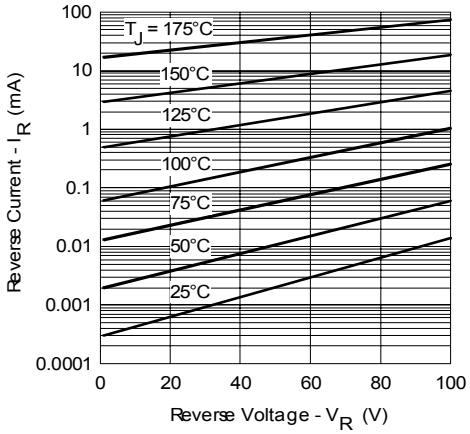


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

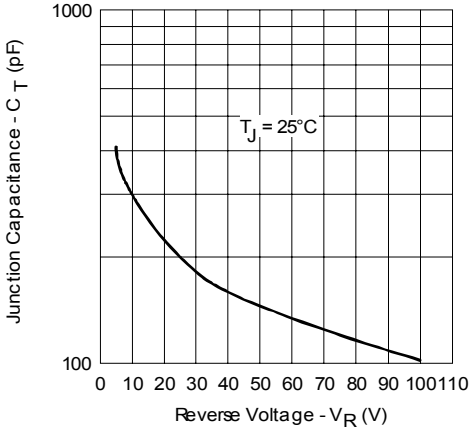


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

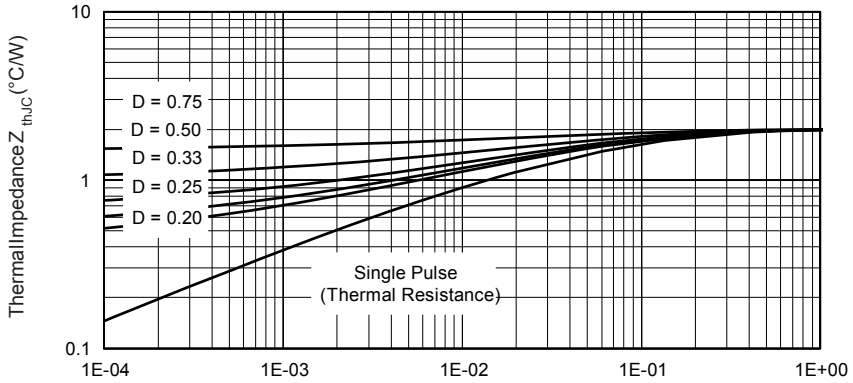


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

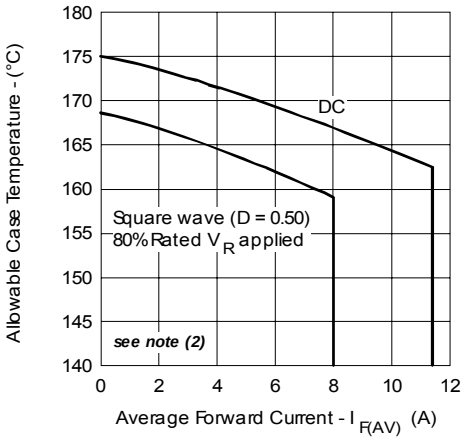


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

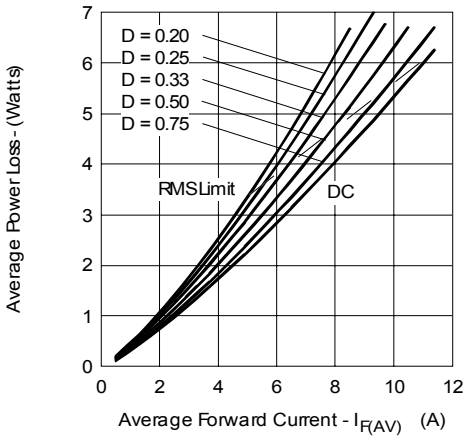


Fig. 6 - Forward Power Loss Characteristics

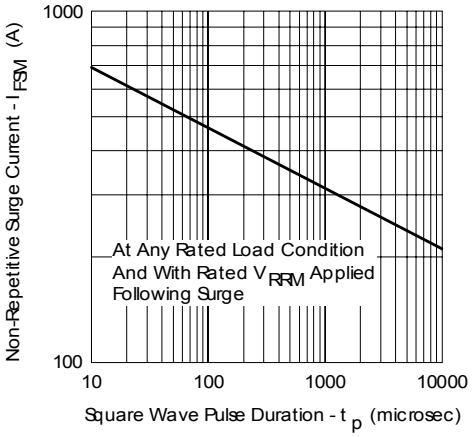


Fig. 7 - Maximum Non-Repetitive Surge Current


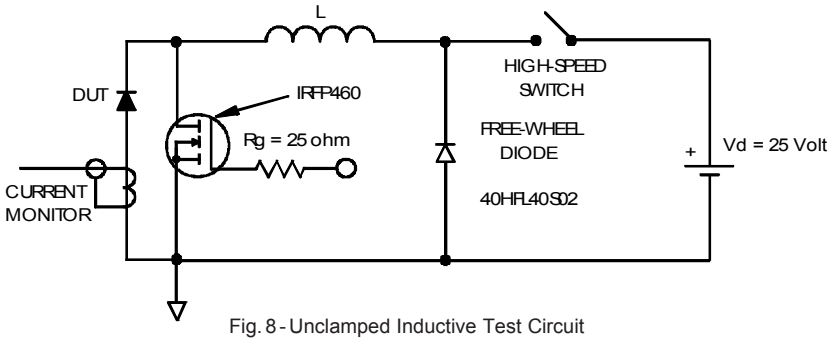


Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = 80% rated V_R

Outline Table

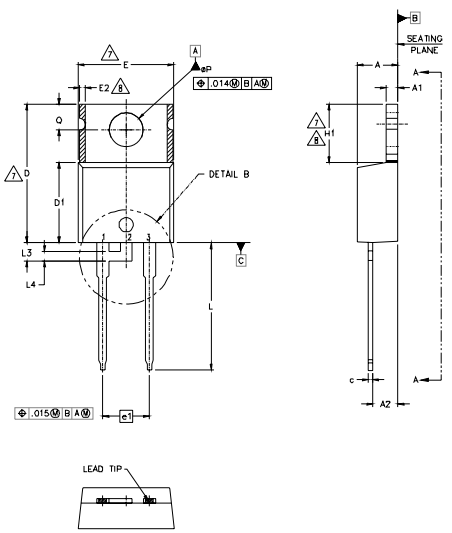


NOTES:
1.- DIMENSIONING AND TOLERANCING AS PER ASME Y14.5 M- 1994.
2.- DIMENSIONS ARE SHOWN IN INCHES [MILLIMETERS].
3.- LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.
4.- DIMENSION D, D1 & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
5.- DIMENSION b1, b3 & c1 APPLY TO BASE METAL ONLY.
6.- CONTROLLING DIMENSION : INCHES.
7.- THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS E,H1,D2 & E1
8.- DIMENSION E2 X H1 DEFINE A ZONE WHERE STAMPING AND SINGULATION IRREGULARITIES ARE ALLOWED.
9.- OUTLINE CONFORMS TO JEDEC TO-220, D2 (min) WHERE DIMENSIONS ARE DERIVED FROM THE ACTUAL PACKAGE OUTLINE.

SYMBOL	DIMENSIONS				NOTES
	MILLIMETERS		INCHES		
	MIN.	MAX.	MIN.	MAX.	
A	3.56	4.83	.140	.190	
A1	0.51	1.40	.020	.055	
A2	2.03	2.92	.080	.115	
b	0.38	1.01	.015	.040	
b1	0.38	0.97	.015	.038	5
b2	1.14	1.78	.045	.070	
b3	1.14	1.73	.045	.068	5
c	0.36	0.61	.014	.024	
c1	0.36	0.56	.014	.022	5
D	14.22	16.51	.560	.650	4
D1	8.38	9.02	.330	.355	
D2	11.68	12.88	.460	.507	7
E	9.65	10.67	.380	.420	4,7
E1	6.86	8.89	.270	.350	7
E2	–	0.76	–	.030	8
e	2.54 BSC		.100 BSC		
e1	5.08 BSC		.200 BSC		
H1	5.84	6.86	.230	.270	7,8
L	12.70	14.73	.500	.580	
L1	–	6.35	–	.250	3
L3	1.78	2.13	.070	.084	
L4	0.76	1.27	.030	.050	3
øP	3.53	3.73	.139	.147	
Q	2.54	3.05	.100	.120	

LEAD ASSIGNMENTS
DIODES
1+2.- CATHODE
3.- ANODE

Conform to JEDEC outline TO-220AC
Dimensions in millimeters and (inches)

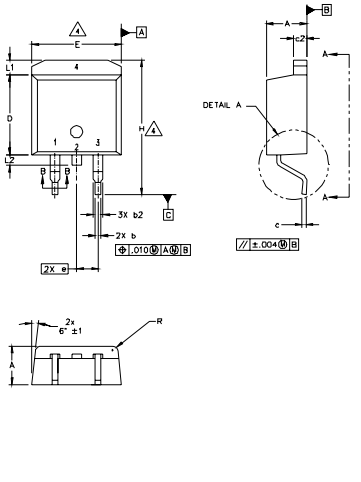

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M–1994
2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES]
3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [.005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
4. DIMENSION b1 AND c1 APPLY TO BASE METAL ONLY.
5. CONTROLLING DIMENSION: INCH.

SYMBOL	DIMENSIONS				NOTES
	MILLIMETERS		INCHES		
	MIN.	MAX.	MIN.	MAX.	
A	4.06	4.83	.160	.190	
A1	0.00	0.254	.000	.010	
b	0.51	0.99	.020	.039	
b1	0.51	0.89	.020	.035	4
b2	1.14	1.78	.045	.070	
c	0.38	0.74	.015	.029	
c1	0.38	0.58	.015	.023	4
c2	1.14	1.65	.045	.065	
D	8.51	9.65	.335	.380	3
D1	6.86		.270		
E	9.65	10.67	.380	.420	3
E1	6.22		.245		
e	2.54 BSC		.100 BSC		
H	14.61	15.88	.575	.625	
L	1.78	2.79	.070	.110	
L1		1.65		.065	
L2	1.27	1.78	.050	.070	
L3	0.25 BSC		.010 BSC		
L4	4.78	5.28	.188	.208	
m	17.78		.700		
m1	8.89		.350		
n	11.43		.450		
o	2.08		.082		
p	3.81		.150		
R	0.51	0.71	.020	.028	
θ	90°	93°	90°	93°	

LEAD ASSIGNMENTS

HEXFET
1.– GATE
2, 4.– DRAIN
3.– SOURCE

IGBTs, CoPACK
1.– GATE
2, 4.– COLLECTOR
3.– EMITTER

DIODES
1.– ANODE *
2, 4.– CATHODE
3.– ANODE


* PART DEPENDENT.

Conform to JEDEC outline D^{2}Pak (SMD-220)
Dimensions in millimeters and (inches)

Part Marking Information


TO-220AC

EXAMPLE: THIS IS A 8TQ100
LOT CODE 1789
ASSEMBLED ON WW 19, 2001
IN THE ASSEMBLY LINE "C"

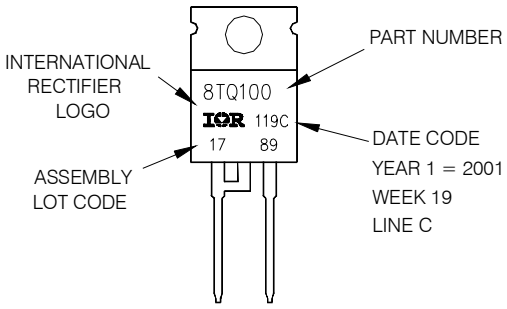


D²Pak

EXAMPLE: THIS IS A 8TQ100S
LOT CODE 8024
ASSEMBLED ON WW 02, 2000

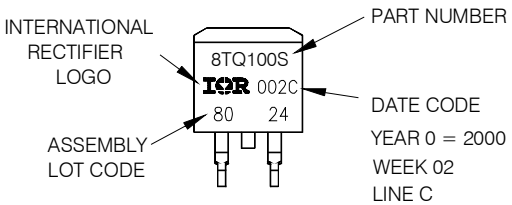

Tape & Reel Information

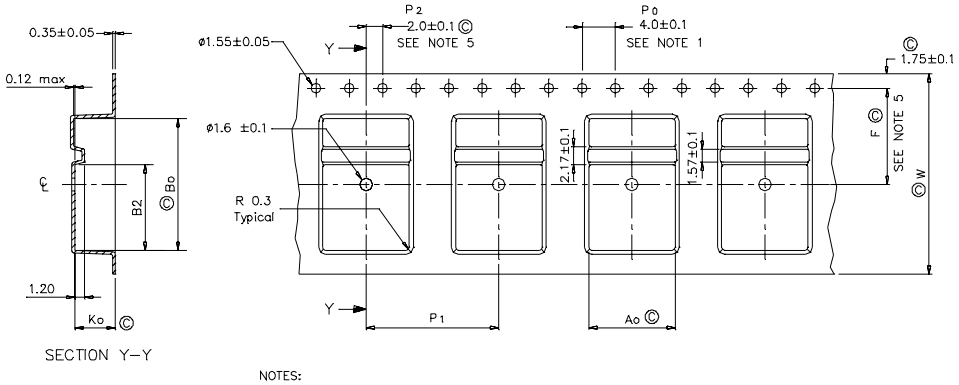


Ao	10.50 +/- 0.1
Bo	15.80 +/- 0.1
B2	10.25 +/- 0.1
Ko	4.90 +/- 0.1
F	11.50 +/- 0.1
P1	16.00 +/- 0.1
W	24.00 +/- 0.3

NOTES:
1.0 10 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ±.02
2.0 CAMBER NOT TO EXCEED 1mm In 100mm
3.0 MATERIAL: CONDUCTIVE BLACK STYRENIC ALLOY
4.0 Ko MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
6.0 VENDOR: (OPTIONAL)
7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10^6 OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
10.0 © CRITICAL

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code

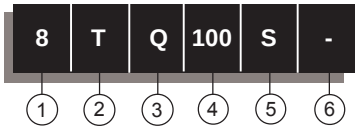

1 - Current Rating (8 = 8A)

2 - Package
T = TO-220

3 - Schottky "Q" Series

4 - Voltage Ratings
080 = 80V
100 = 100V

5 - • none = TO-220
• S = D^2Pak

6 - • none = Standard Production
• PbF = Lead-Free

Tube Standard Pack Quantity : 50 pieces

```
8TQ100
******************************************
*     This model has been developed by     *
*    Wizard SPICE MODEL GENERATOR (1999)   *
*  (International Rectifier Corporation)   *
*    Contain Proprietary Information       *
******************************************
* SPICE Model Diode is composed by a       *
* simple diode plus paralled VCG2T         *
******************************************
.SUBCKT 8TQ100 ANO CAT
D1 ANO 1 DMOD (0.07089)
*Define diode model
.MODEL DMOD D(IS=1.15938021883115E-03A,N=1.95244918720315,BV=120V,
+ IBV=5.37891460505463A,RS= 0.00127602,CJO=9.9895753025115E-09,
+ VJ=2.30070034831946,XTI=2, EG=0.758916909331649)
******************************************
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=-90.2420977904848)
GP1 ANO CAT VALUE={-ABS(I(VX))*(EXP((((1.635248E-02/-90.2421)*((V(2,CAT)*1E6)/(I(VX)+1E-6)-
1))+1)*4.011038E-03*ABS(V(ANO,CAT)))-1)}
******************************************
.ENDS 8TQ100


Thermal Model Subcircuit
.SUBCKT 8TQ100  5 1

CTHERM1       5    4      1.45E+00
CTHERM2       4    3      4.54E+00
CTHERM3       3    2      1.09E+01
CTHERM4       2    1      1.01E+02

RTHERM1       5    4      2.49E+00
RTHERM2       4    3      5.20E-04
RTHERM1       3    2      5.43E-01
RTHERM1       2    1      3.05E-02


.ENDS 8TQ100
```

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 06/06

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.