Complementary Silicon Plastic Power Transistors

. . . designed for use in general purpose amplifier and switching applications.

- Collector–Emitter Saturation Voltage —
  V_{CE} = 1.2 Vdc (Max) @ I_C = 3.0 Adc
- Collector–Emitter Sustaining Voltage —
  $V_{CEO(sus)}$ = 80 Vdc (Min.) BD241B, BD242B
  = 100 Vdc (Min.) BD241C, BD242C
- High Current Gain — Bandwidth Product
  f_T = 3.0 MHz (Min) @ I_C = 500 mAdc
- Compact TO–220 AB Package

NPN
BD241B
BD241C*
PNP
BD242B
BD242C*

***Motorola Preferred Device**

3 AMPERE
POWER TRANSISTORS
COMPLEMENTARY
SILICON
80, 100 VOLTS
40 WATTS



CASE 221A–06
TO–220AB

MAXIMUM RATINGS

Rating	Symbol	BD241B BD242B	BD241C BD242C	Unit
Collector–Emitter Voltage	V_{CEO}	80	100	Vdc
Collector–Emitter Voltage	V_{CES}	90	115	Vdc
Emitter–Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous Peak	I_C	3.0 5.0		Adc Adc
Base Current	I_B	1.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 0.32		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.125	°C/W

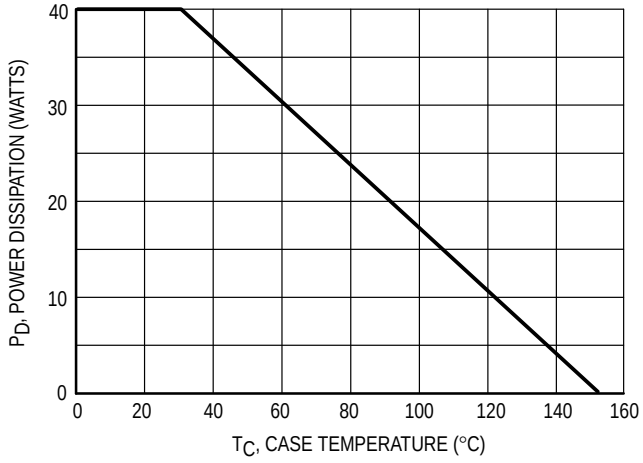

Figure 1. Power Derating

Preferred devices are Motorola recommended choices for future use and best overall value.

REV 7

© Motorola, Inc. 1995

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS					
Collector–Emitter Sustaining Voltage[1] (I_C = 30 mAdc, I_B = 0)	BD241B, BD242B BD241C, BD242C	V_{CEO}	80 100		Vdc
Collector Cutoff Current (V_{CE} = 60 Vdc, I_B = 0)	BD241B, BD241C, BD242B, BD242C	I_{CEO}		0.3	mAdc
Collector Cutoff Current (V_{CE} = 80 Vdc, V_{EB} = 0) (V_{CE} = 100 Vdc, V_{EB} = 0)	BD241B, BD242B BD241C, BD242C	I_{CES}		200 200	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}		1.0	mAdc
ON CHARACTERISTICS[1]					
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc) (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)		h_{FE}	25 10		
Collector–Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 600 Adc)		$V_{CE(sat)}$		1.2	Vdc
Base–Emitter On Voltage (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$		1.8	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product[2] (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0		MHz
Small–Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		h_{fe}	20		

1 Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
2 $f_T = |h_{fe}| \bullet f_{test}$.

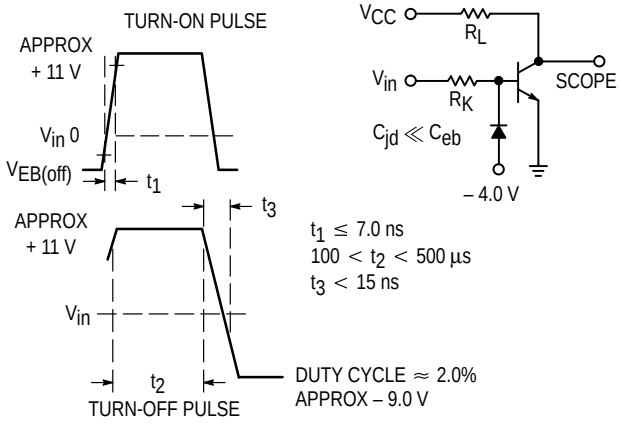

Figure 2. Switching Time Equivalent Circuit

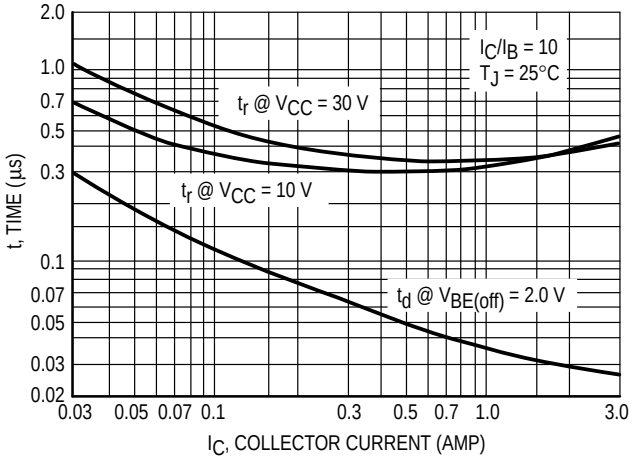

Figure 3. Turn–On Time

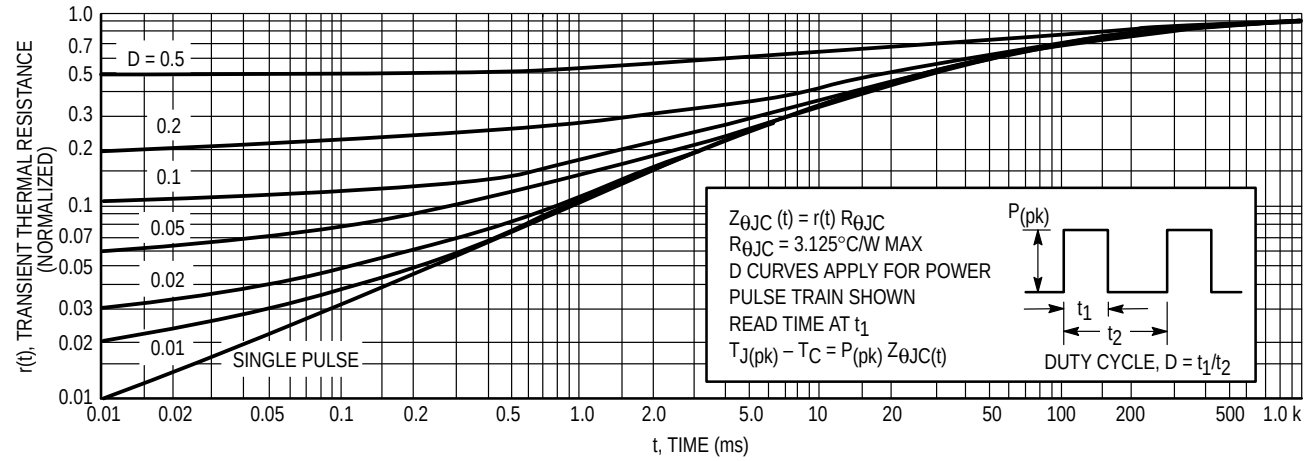

Figure 4. Thermal Response

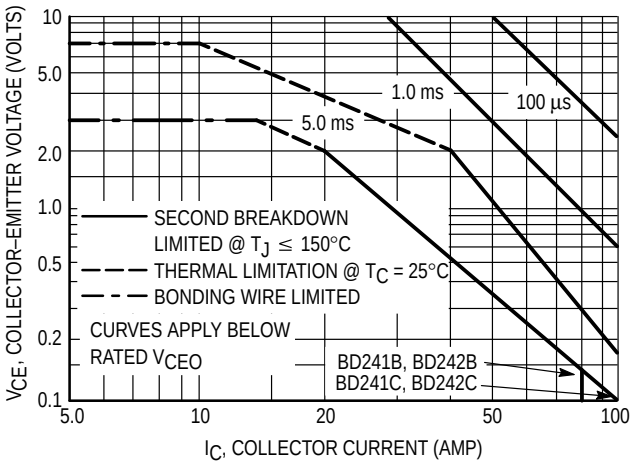

Figure 5. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150°C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$, $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

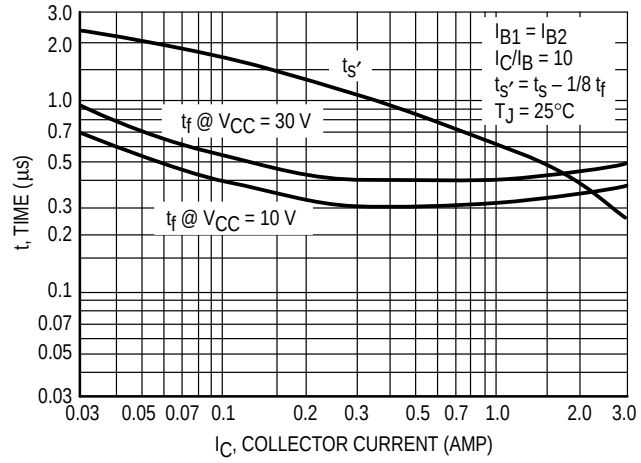

Figure 6. Turn–Off Time

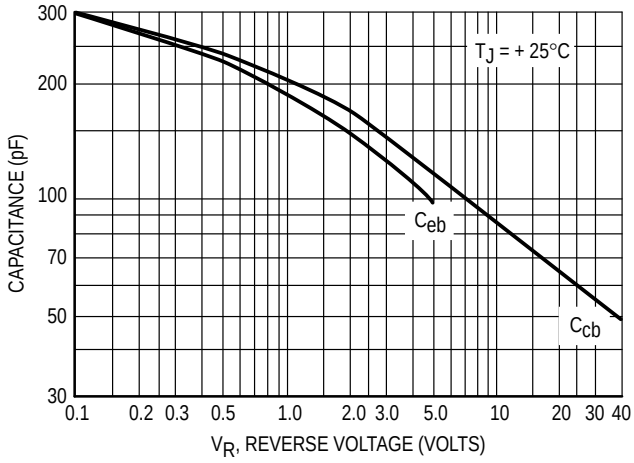

Figure 7. Capacitance

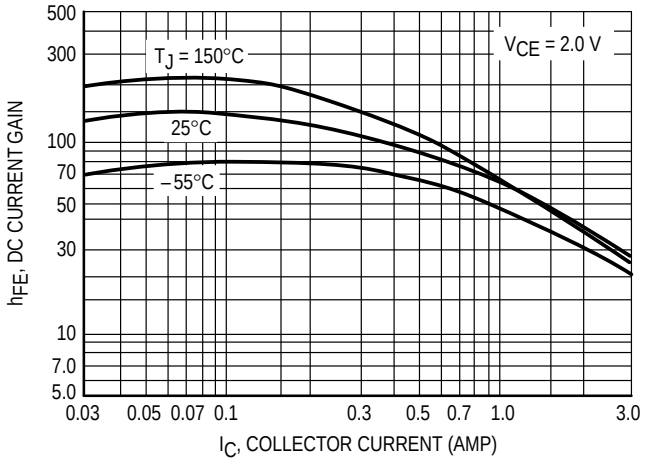

Figure 8. DC Current Gain

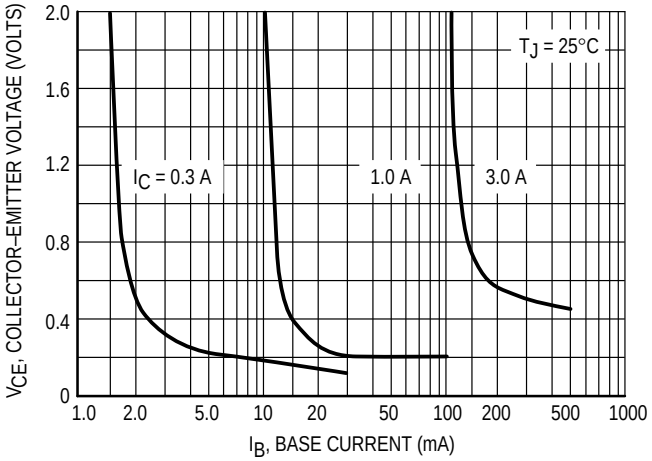

Figure 9. Collector Saturation Region

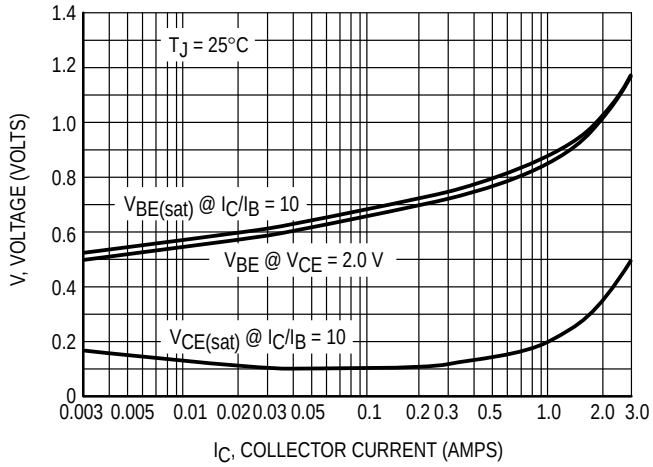

Figure 10. “On” Voltages

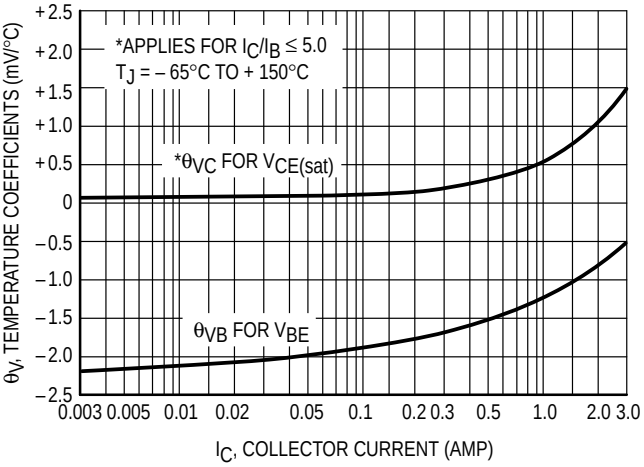

Figure 11. Temperature Coefficients

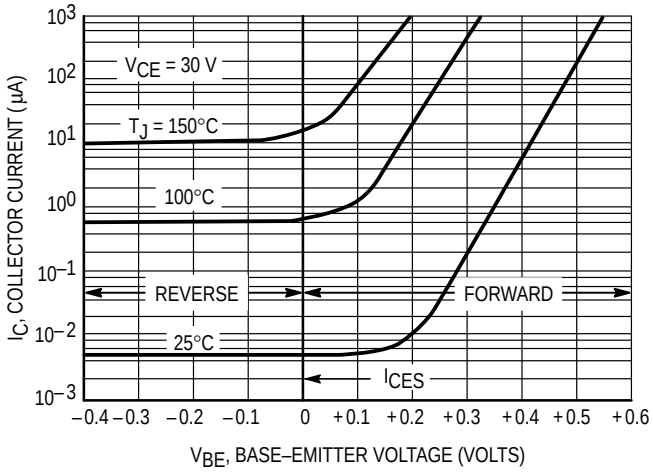

Figure 12. Collector Cut–Off Region

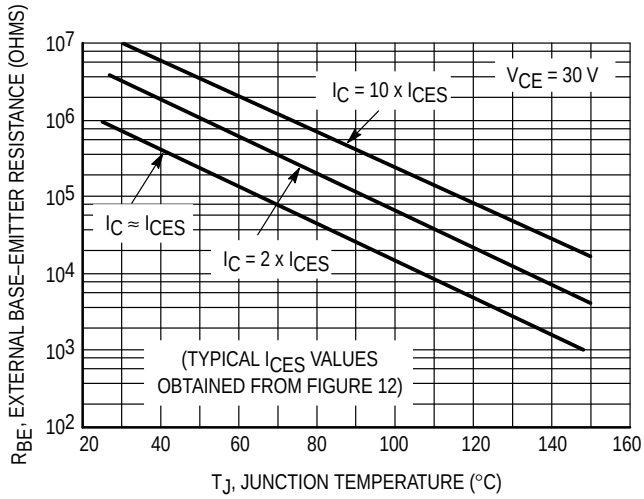

Figure 13. Effects of Base–Emitter Resistance

PACKAGE DIMENSIONS

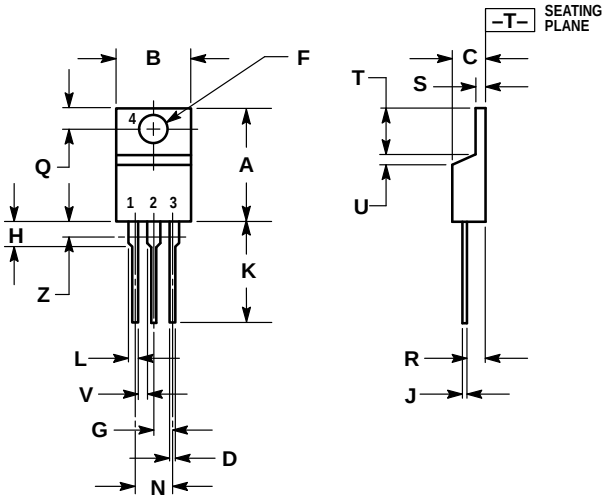

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	—	1.15	—
Z	—	0.080	—	2.04

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A–06
TO–220AB
ISSUE Y

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:
USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244–6609
INTERNET: http://Design–NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, Toshikatsu Otsuki,
6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–3521–8315

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.