
TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA8415P

STEPPING MOTOR CONTROLLER / DRIVER

The TA8415P is general purpose unipolar stepping motor controller / driver, applicable to 3 / 4 phase motors and 1, 1−2, 2 phase excitation drive by initial setting of control terminals.

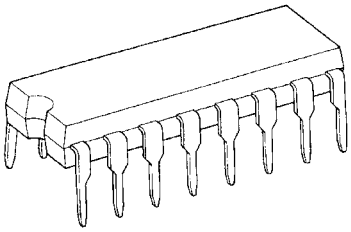


DIP16-P-300-2.54A

Weight: 1.11 g (Typ.)

FEATURES

- 1 chip stepping motor controller / driver.
- 3 or 4 phase and 1, 1−2, 2 phase excitation drive are available.
- CW / CCW rotation and 1 clock or 2 clock drive are available.
- Hysteresis is provided with clock, CW / CCW, reset inputs for noise protection.
- Output enable, initial detect are available.
- Output current up to 400mA (MAX.)

BLOCK DIAGRAM

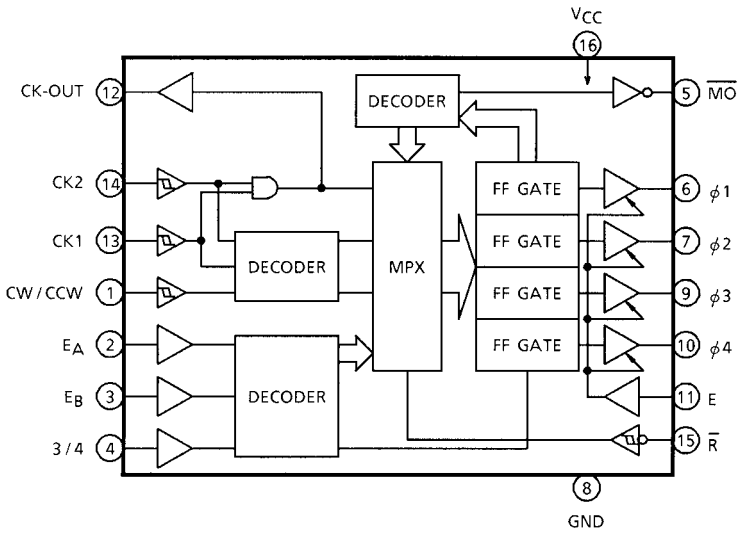

PIN FUNCTION

PIN No.	SYMBOL	PIN NAME	FUNCTIONAL DESCRIPTION	
1	CW / CCW	Clock Wise / Counter Clock Wise	Direction Control Input Function Table A	
2	E_A	Excitation A	Phase Excitation Mode Input	Truth Table B
3	E_B	Excitation B		
4	3 / 4	3 Phases / 4 Phases	Phase Control Input	
5	$\overline{MO}$	Monitor Out	$\overline{MO}$ = “L” at Initial State	
6	φ1	φ1 Out	φ1 Output	
7	φ2	φ2 Out	φ2 Output	
8	GND	GND	GND	
9	φ3	φ3 Out	φ3 Output	
10	φ4	φ4 Out	φ4 Output	
11	E	Output Enable	Outputs are Enable at E = “H”	
12	CK−OUT	Clock−Out	Clock Output	
13	CK1	Clock I_n−1	Clock Input 1	Truth Table A
14	CK2	Clock I_n−2	Clock Input 2	
15	$\overline{R}$	Reset	Reset Input	
16	V_{CC}	V_{CC}	V_{CC}	

TRUTH TABLE A

CK1	CK2	CW / CCW	FUNCTION
↓	H	L	CW
↑	L	L	Inhibit
H	↓	L	CCW
L	↑	L	Inhibit
↓	H	H	CCW
↑	L	H	Inhibit
H	↓	H	CW
L	↑	H	Inhibit


TRUTH TABLE B

E_A	E_B	3 / 4 (Note)	FUNCTION	
L	L	L	4 Phases	1 Phase Excitation
H	L	L		2 Phase Excitation
L	H	L		1−2 Phase Excitation
H	H	L	Test Mode φ1~φ4 ON	
L	L	H	3 Phases	1 Phase Excitation
H	L	H		2 Phase Excitation
L	H	H		1−2 Phase Excitation
H	H	H	Test Mode φ1~φ4 ON	


Note: Conversion of Phase Excitation Mode must be made after the Reset Mode is established.

SCHEMATIC OF INPUTS AND OUTPUTS


E_A, E_B, 3/4, E




CK1, CK2, CW/CCW, $\overline{R}$



$\phi 1 \sim \phi 4$



$\overline{MO}$, CK-OUT



MAXIMUM RATINGS (Ta = 25°C Unless otherwise noted)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	−0.3~7.0	V
Output Sustaining Voltage	$V_{CE\,(SUS)}\varphi$	−0.3~28	V
Output Current (ϕn)	$I_{OUT}\varphi$	400	mA
Output Current ($\overline{MO}$, CK−OUT)	I_{OUT} $\overline{MO}$ CK−OUT	10	mA
Input Voltage	V_{IN}	−0.3~V_{CC} + 0.3	V
Input Current	I_{IN}	±1	mA
Power Dissipation	P_D	1.2	W
Operating Temperature	T_{opr}	−30~85	°C
Storage Temperature	T_{stg}	−55~150	°C

RECOMMENDED OPERATION CONDITION (Ta = −30~85°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN	TYP.	MAX	UNIT
Supply Voltage		V_{CC}	—	4.5	5.0	5.5	V
Output Sustaining Voltage		$V_{CE\,(SUS)}\varphi$	—	0	—	26	V
Output Current φn	"L" Level	$I_{OUT}\varphi$	—	—	—	200	mA
Output Current $\overline{MO}$, CK−OUT	"H" Level	I_{OH}	—	—	—	−0.4	mA
	"L" Level	I_{OL}	—	—	—	8	
Input Voltage		V_{IN}	—	0	—	V_{CC}	V
Clock Frequency		f_{CLOCK}	—	0	—	100	kHz
Power Dissipation		P_D	—	—	—	0.6	W

ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC			SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN	TYP.	MAX	UNIT
Input Voltage	"H" Level		V_{IH}	—	—	2.0	—	—	V
	"L" Level		V_{IL}		—	—	—	0.8	
Input Current	"H" Level		I_{IH}	—	V_{CC} = 5.5 V, V_{IH} = 5.5 V	—	—	10	μA
	"L" Level		I_{IL}		V_{CC} = 5.5 V, V_{IL} = 0.4 V	—	—	−0.4	mA
Hysteresis			ΔV_T	—	—	—	150	—	mV
Supply Current			I_{CC}	—	—	—	—	100	mA
Output Leakage Current ϕn			$I_{OH\varphi}$	—	V_{CC} = 5.5 V, V_{OUT} = 26 V	—	—	100	μA
Output Voltage	"H" Level	$\overline{MO}$ CK-OUT	V_{OH}	—	V_{CC} = 4.5 V, I_{OH} = −0.4 mA	2.4	—	—	V
					V_{CC} = 5.0 V, I_{OH} = −10 μA	4.0	—	—	
	"L" Level	$\overline{MO}$ CK-OUT	V_{OL}	—	V_{CC} = 4.5 V, I_{OL} = 8 mA	—	—	0.4	
		φn	$V_{OUT\varphi}$	—	V_{CC} = 4.5 V, I_{OUT} = 400 mA t = 100 ms	—	—	1.1	
				—	V_{CC} = 4.5 V, I_{OUT} = 200 mA t = 100 ms	—	—	0.6	

SWITCHING CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC			SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN	TYP.	MAX	UNIT
Propa-gation Delay Time	"H" Level	CK-φn	t_{pLH}	—	—	—	2.0	—	μs
		CK-CK-OUT				—	1.0	—	
		CK-$\overline{MO}$				—	2.8	—	
		E-φn				—	1.0	—	
		R-φn				—	2.0	—	
	"L" Level	CK-φn	t_{pHL}			—	1.4	—	
		CK-CK-OUT				—	0.7	—	
		CK-$\overline{MO}$				—	2.1	—	
		E-φn				—	1.2	—	
		$\overline{R}$ -φn				—	1.0	—	
		R-MO				—	2.0	—	
Maximum Clock Frequency			f_{max}	—	—	—	250	—	kHz
Set Up Time CK, CW / CCW			t_{set-up}	—	—	—	0.1	—	
Hold Time CK, CW / CCW			t_{hold}	—	—	—	0.1	—	
Minimum Clock Pulse Width			$t_{w\,(CK)}$	—	—	—	1.0	—	
Minimum Reset Pulse Width			$t_{w\,(R)}$	—	—	—	1.0	—	
Maximum Clock Rise Time			t_r (CK)	—	—	—	10	—	μs

TIMING CHART
3 PHASES METHOD


1 PHASE EXCITATION CW

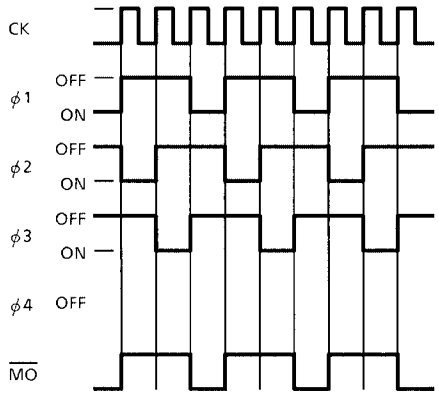


1 PHASE EXCITATION CCW

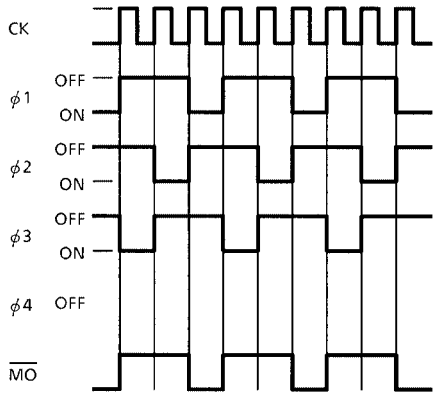


2 PHASE EXCITATION CW

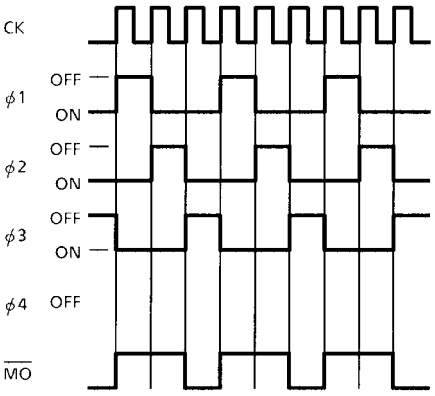


2 PHASE EXCITATION CCW

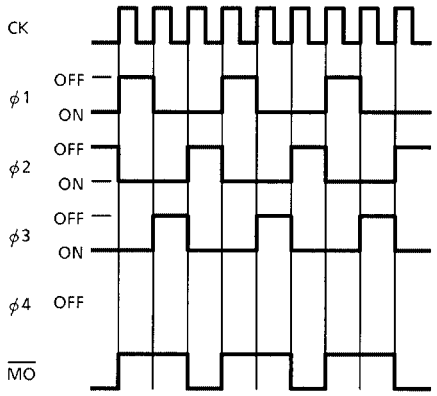

1−2 PHASE EXCITATION CW

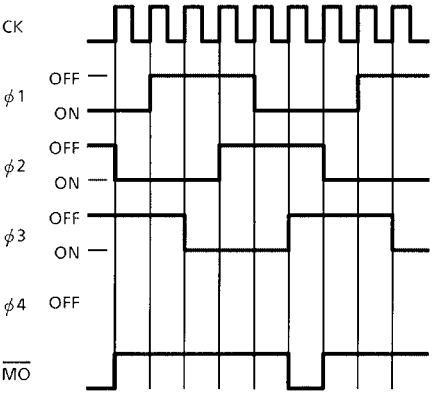


1−2 PHASE EXCITATION CCW

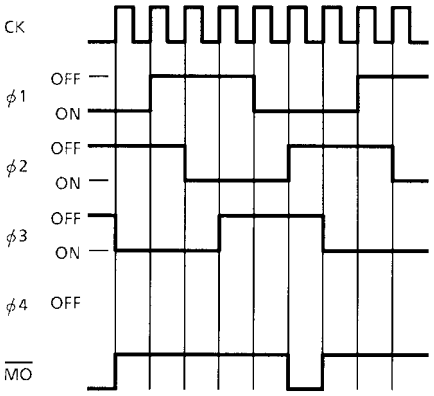


4 PHASES METHOD


1 PHASE EXCITATION CW

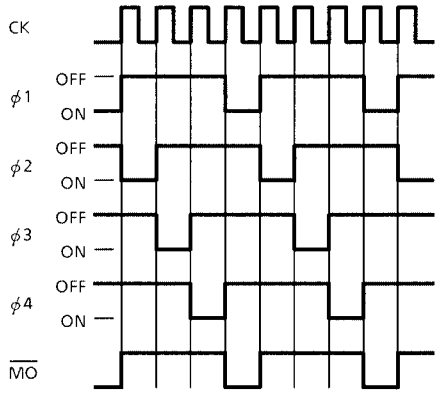


1 PHASE EXCITATION CCW

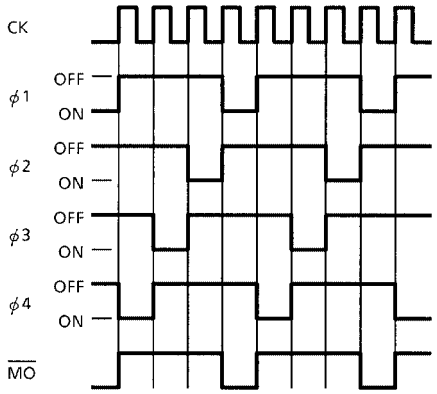


2 PHASE EXCITATION CW

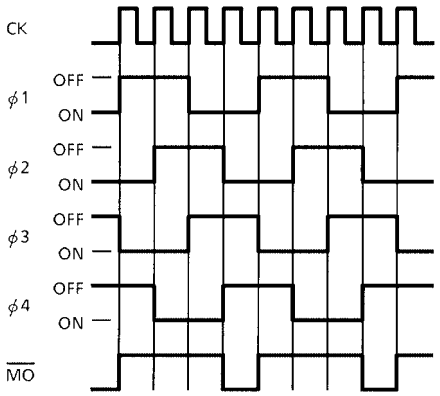


2 PHASE EXCITATION CCW

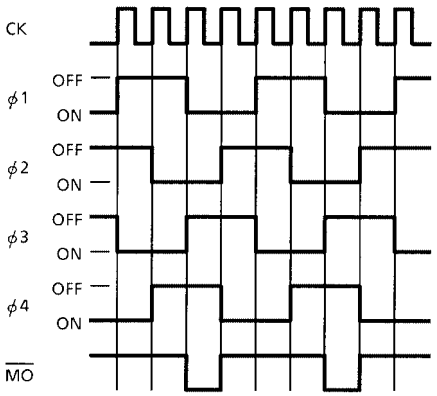



1−2 PHASE EXCITATION CW

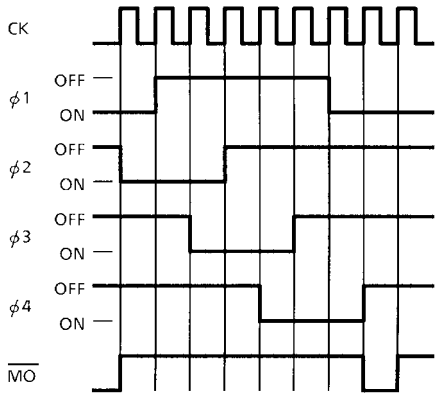


1−2 PHASE EXCITATION CCW

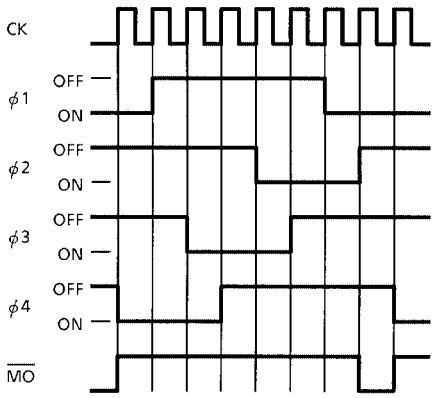

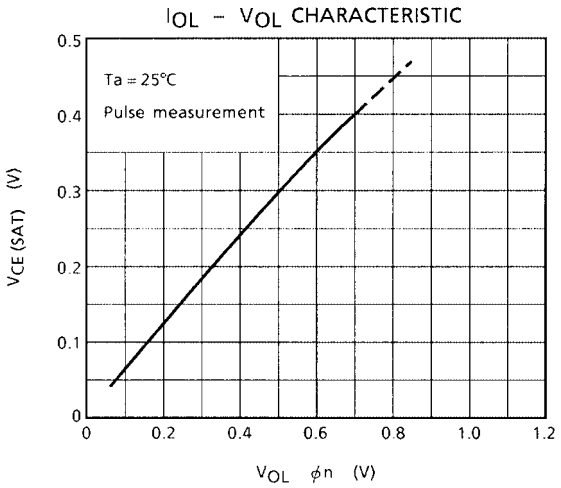

I_{OL} – V_{OL} CHARACTERISTIC
Ta = 25°C
Pulse measurement
$V_{CE (SAT)}$ (V)
V_{OL} ϕn (V)
0.5
0.4
0.3
0.2
0.1
0
0
0.2
0.4
0.6
0.8
1.0
1.2

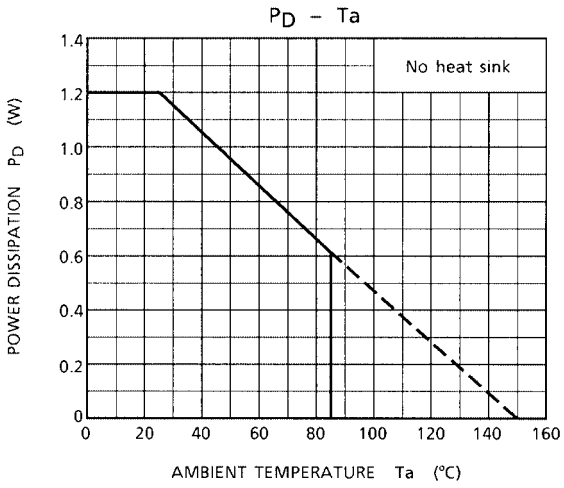
P_D – Ta
No heat sink
POWER DISSIPATION P_D (W)
AMBIENT TEMPERATURE Ta (°C)
1.4
1.2
1.0
0.8
0.6
0.4
0.2
0
0
20
40
60
80
100
120
140
160

APPLICATION CIRCUIT 1
(TA8415P + TD62308BP 4 phase stepping motor driver circuit)

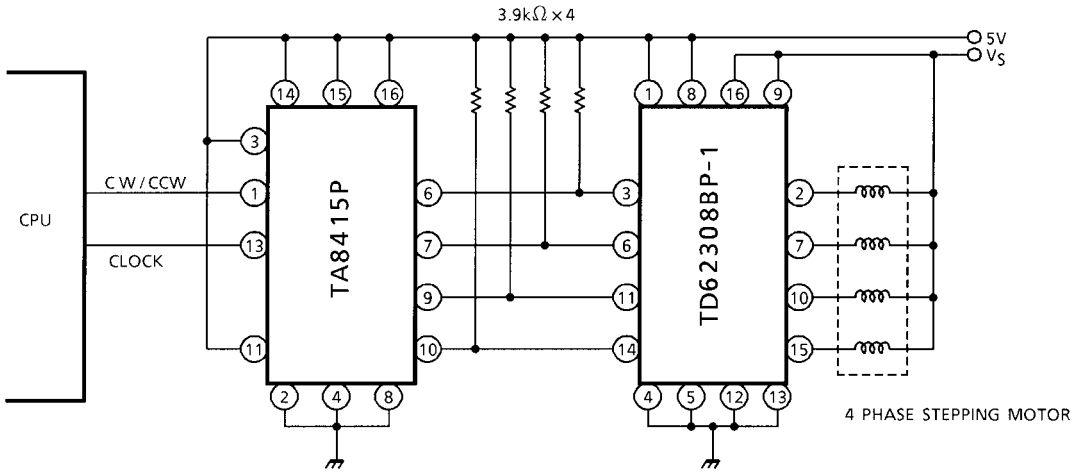


APPLICATION CIRCUIT 2
(TA8415P + TD62553S + MP4001 high efficiency stepping motor driver circuit)

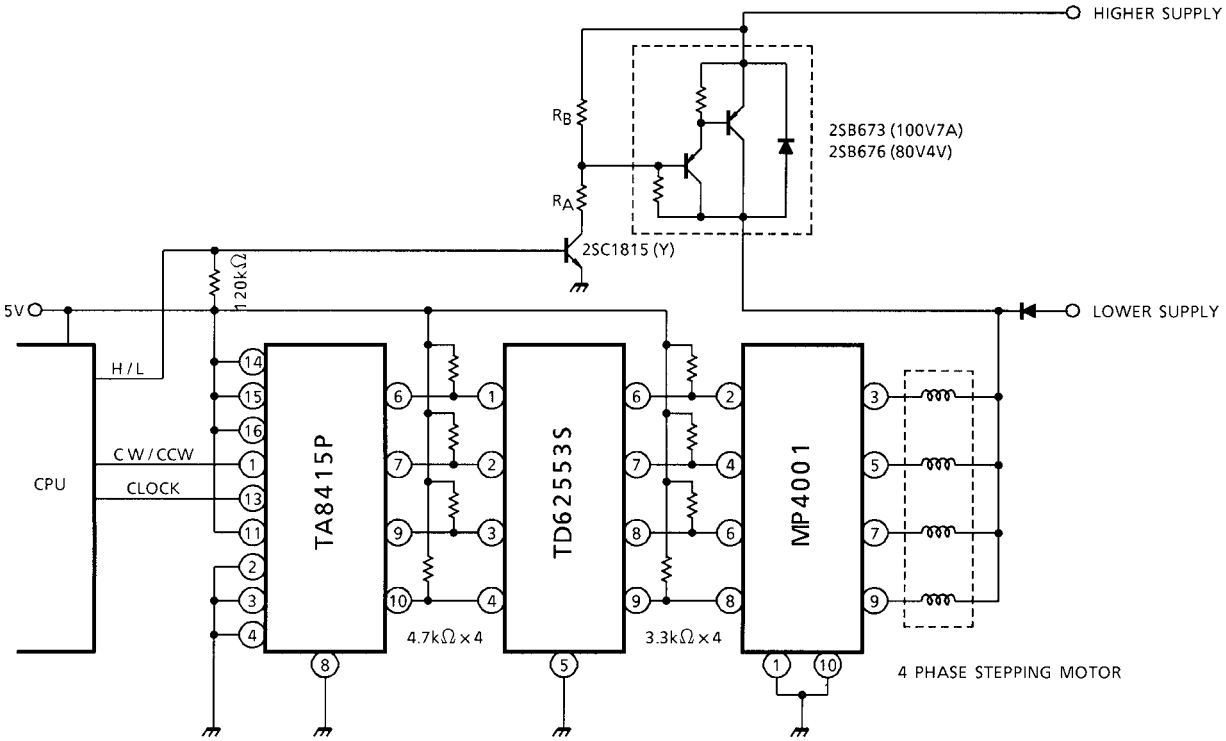


APPLICATION CIRCUIT 3

4 phase motor 1−2 phase excitation drive Ⅰ.

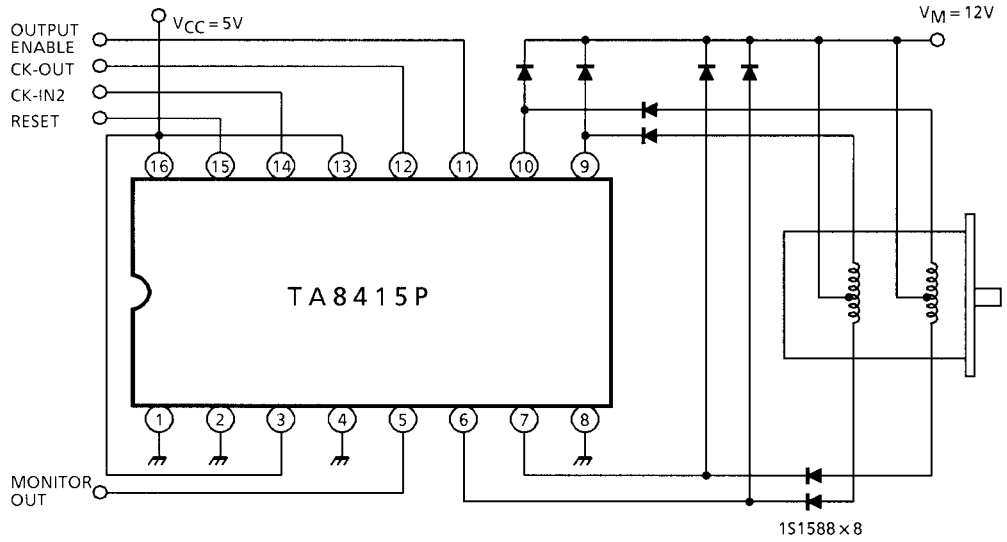

APPLICATION CIRCUIT 4


4 phase motor 1−2 phase excitation drive Ⅱ.

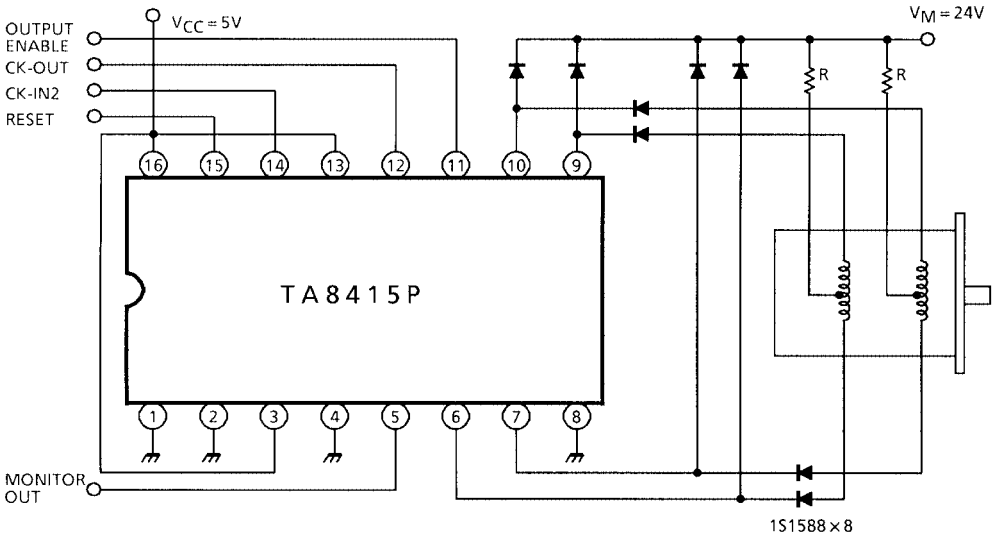

Note: Utmost care is necessary in the design of the output line, power supply and GND line since IC may be destroyed due to short−circuit between outputs, air contamination fault, or fault by improper grounding.

PACKAGE DIMENSIONS

DIP16−P−300−2.54A Unit: mm

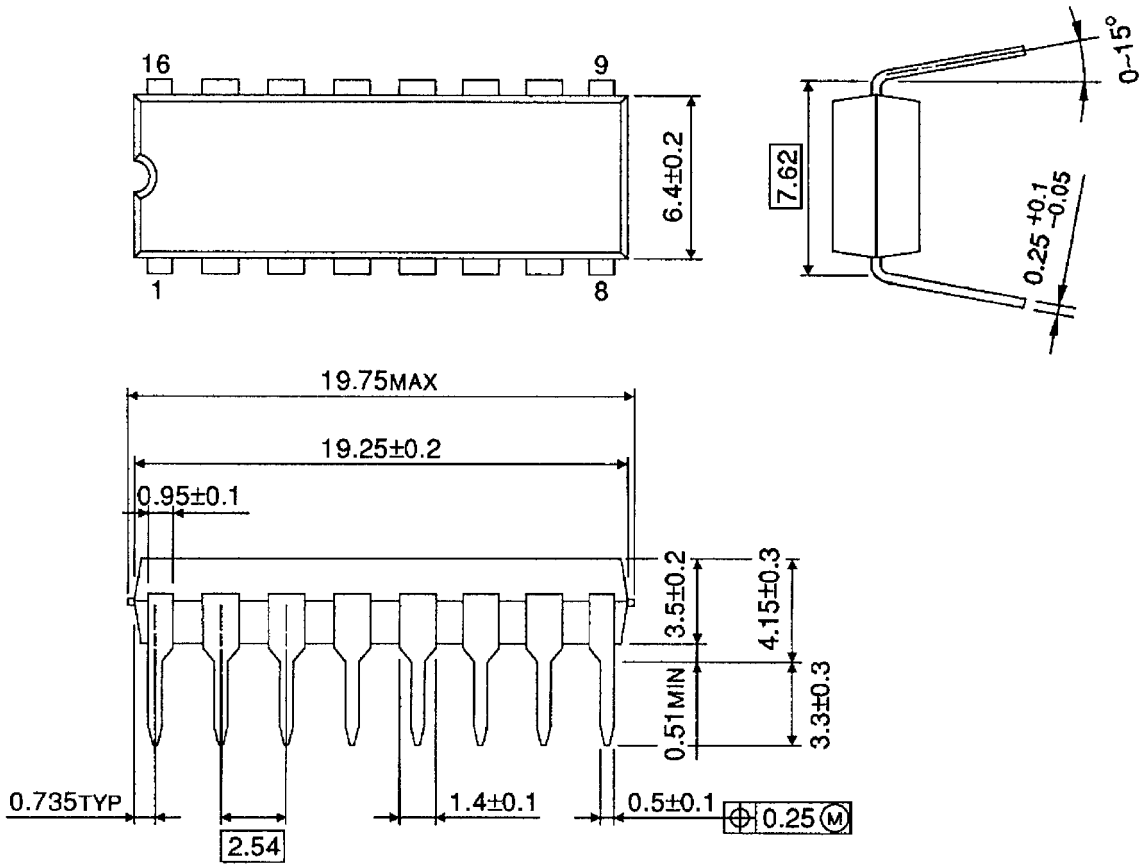

Weight: 1.11 g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the “Handling Guide for Semiconductor Devices,” or “TOSHIBA Semiconductor Reliability Handbook” etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer’s own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.