Fuji Electric

*Innovating Energy Technology*

# FMW60N070S2HF

http://www.fujielectric.com/products/semiconductor/

FUJI POWER MOSFET

## Super J MOS® S2 series

**N-Channel enhancement mode power MOSFET**


### Features

Pb-free lead terminal
RoHS compliant
uses Halogen-free molding compound

### Applications

For switching

### Equivalent circuit schematic

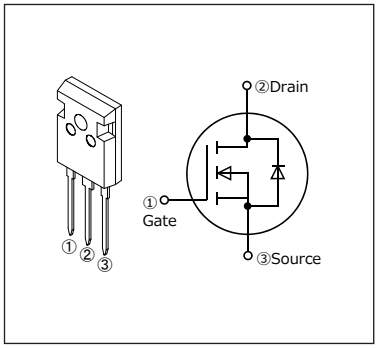


### Absolute Maximum Ratings at $T_C$=25°C (unless otherwise specified)

| Parameter | Symbol | Characteristics | Unit | Remarks |
|---|---|---|---|---|
| Drain-Source Voltage | $V_{DS}$ | 600 | V | |
| | $V_{DSX}$ | 600 | V | $V_{GS}$=-30V |
| Continuous Drain Current | $I_D$ | 53.2 | A | $T_C$=25°C Note*1,2 |
| | | 33.6 | A | $T_C$=100°C Note*1,2 |
| Pulsed Drain Current | $I_{DP}$ | 158 | A | Note *2 |
| Gate-Source Voltage | $V_{GS}$ | ±30 | V | |
| Non-Repetitive Maximum Avalanche Current | $I_{AS}$ | 6.3 | A | Note *3 |
| Non-Repetitive Maximum Avalanche Energy | $E_{AS}$ | 1305 | mJ | Note *4 |
| Maximum Drain-Source dV/dt | $dV_{DS}/dt$ | 50 | V/ns | $V_{DS}$≤ 600V |
| Continuous Diode Forward Current | $I_{SD}$ | 53.2 | A | $T_C$=25°C Note*1,2 |
| | | 33.6 | A | $T_C$=100°C Note*1,2 |
| Pulsed Diode Forward Current | $I_{SDP}$ | 158 | A | Note *2 |
| Peak Diode Recovery dV/dt | dV/dt | 15 | V/ns | Note *5 |
| Peak Diode Recovery -di/dt | -di/dt | 100 | A/µs | Note *6 |
| Maximum Power Dissipation | $P_D$ | 2.5 | W | $T_a$=25°C |
| | | 270 | | $T_C$=25°C |
| Operating and Storage Temperature range | $T_{ch}$ | 150 | °C | |
| | $T_{stg}$ | -55 to +150 | °C | |

Note *1 : Maximum duty cycle D=0.55
Note *2 : Limited by maximum channel temperature.
Note *3 : $T_{ch}$≤150°C, See Fig.1 and Fig.2
Note *4 : Starting $T_{ch}$=25°C, $I_{AS}$=3.8A, L=166mH, $V_{DD}$=60V, $R_G$=50Ω, See Fig.1 and Fig.2
$E_{AS}$ limited by maximum channel temperature and avalanche current.
Note *5 : $I_{SD}$≤39.4A, -di/dt≤100A/µs, $V_{DS\ peak}$≤ 600V, $T_{ch}$≤150°C.
Note *6 : $I_{SD}$≤39.4A, dV/dt≤15V/ns, $V_{DS\ peak}$≤ 600V, $T_{ch}$≤150°C.



8987a
MARCH 2017

## Electrical Characteristics at $T_c$=25°C (unless otherwise specified)

### • Static Ratings

| Parameter | Symbol | Conditions | | min. | typ. | max. | Unit |
|---|---|---|---|---|---|---|---|
| Drain-Source Breakdown Voltage | $BV_{DSS}$ | $V_{GS}$=0V<br>$I_D$=250μA | | 600 | - | - | V |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}$=$V_{GS}$<br>$I_D$=2.21mA | | 3.5 | 4.0 | 4.5 | V |
| Zero Gate Voltage Drain Current | $I_{DSS}$ | $V_{DS}$=600V<br>$V_{GS}$=0V | $T_{ch}$=25°C | - | - | 25 | μA |
| | | $V_{DS}$=480V<br>$V_{GS}$=0V | $T_{ch}$=125°C | - | - | 250 | |
| Gate-Source Leakage Current | $I_{GSS}$ | $V_{DS}$=0V<br>$V_{GS}$= ± 30V | | - | 10 | 100 | nA |
| Drain-Source On-State Resistance | $R_{DS(on)}$ | $V_{GS}$=10V<br>$I_D$=19.7A | | - | 0.064 | 0.070 | Ω |
| Gate resistance | $R_G$ | f=1MHz, open drain | | - | 6.9 | - | Ω |

### • Dynamic Ratings

| Parameter | Symbol | Conditions | min. | typ. | max. | Unit |
|---|---|---|---|---|---|---|
| Forward Transconductance | $g_{fs}$ | $V_{DS}$=25V<br>$I_D$=19.7A | 13.5 | 27.0 | - | S |
| Input Capacitance | $C_{iss}$ | $V_{DS}$=400V<br>$V_{GS}$=0V<br>f=250kHz | - | 2320 | - | pF |
| Output Capacitance | $C_{oss}$ | | - | 77 | - | |
| Reverse Transfer Capacitance | $C_{rss}$ | | - | 10 | - | |
| Effective output capacitance, energy related (Note *7) | $C_{o(er)}$ | $V_{DS}$=0…400V<br>$V_{GS}$=0V | - | 170 | - | |
| Effective output capacitance, time related (Note *8) | $C_{o(tr)}$ | $V_{DS}$=0…400V<br>$V_{GS}$=0V<br>$I_D$=constant | - | 685 | - | |
| Turn-On Time | $t_{d(on)}$ | $V_{DD}$=400V, $V_{GS}$=10V<br>$I_D$=19.7A,<br>$R_G$=12Ω<br>See Fig.3 and Fig.4 | - | 33 | - | ns |
| | $t_r$ | | - | 115 | - | |
| Turn-Off Time | $t_{d(off)}$ | | - | 139 | - | |
| | $t_f$ | | - | 25 | - | |
| Total Gate Charge | $Q_G$ | $V_{DD}$=400V, $V_{GS}$=10V<br>$I_D$=39.4A<br>See Fig.5 | - | 90 | - | nC |
| Gate-Source Charge | $Q_{GS}$ | | - | 38 | - | |
| Gate-Drain Charge | $Q_{GD}$ | | - | 38 | - | |
| Drain-Source crossover Charge | $Q_{SW}$ | | - | 27 | - | |

Note *7 : $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as $C_{oss}$ while $V_{DS}$ is rising from 0 to 400V.
Note *8 : $C_{o(tr)}$ is a fixed capacitance that gives the same charging times as $C_{oss}$ while $V_{DS}$ is rising from 0 to 400V.


### • Reverse Diode

| Parameter | Symbol | Conditions | min. | typ. | max. | Unit |
|---|---|---|---|---|---|---|
| Diode Forward On-Voltage | $V_{SD}$ | $I_{SD}$=39.4A, $V_{GS}$=0V<br>$T_{ch}$=25°C | - | 0.95 | 1.35 | V |
| Reverse Recovery Time | $t_{rr}$ | $V_{DD}$=400V, $I_{SD}$=39.4A<br>-di/dt=100A/μs<br>$T_{ch}$=25°C<br>See Fig.6 and Fig.7 | - | 400 | - | ns |
| Reverse Recovery Charge | $Q_{rr}$ | | - | 7.4 | - | μC |
| Peak Reverse Recovery Current | $I_{rp}$ | | - | 35 | - | A |


## Thermal Resistance

| Parameter | Symbol | min. | typ. | max. | Unit |
|---|---|---|---|---|---|
| Channel to Case | $R_{th(ch-c)}$ | - | - | 0.463 | °C/W |
| Channel to Ambient | $R_{th(ch-a)}$ | - | - | 50 | °C/W |


Allowable Power Dissipation
$P_D$=f($T_C$)

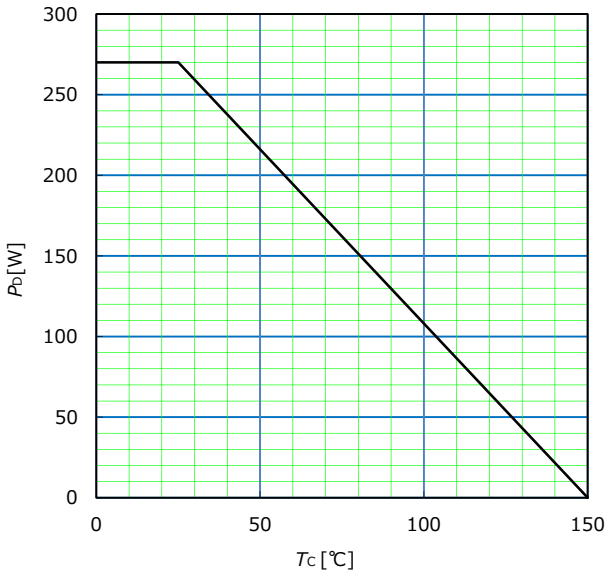



Safe Operating Area
$I_D$=f($V_{DS}$):Duty=0(Single pulse),$T_C$=25℃

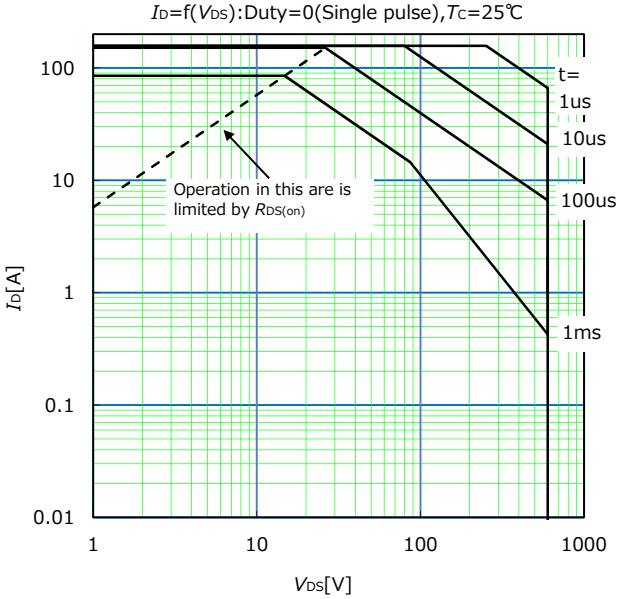



Typical Output Characteristics
$I_D$=f($V_{DS}$):80 μs pulse test,$T_{ch}$=25℃

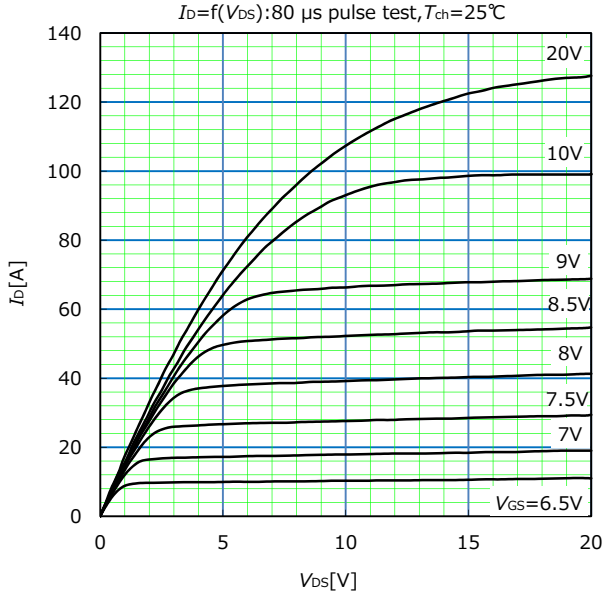



Typical Output Characteristics
$I_D$=f($V_{DS}$):80 μs pulse test,$T_{ch}$=150℃

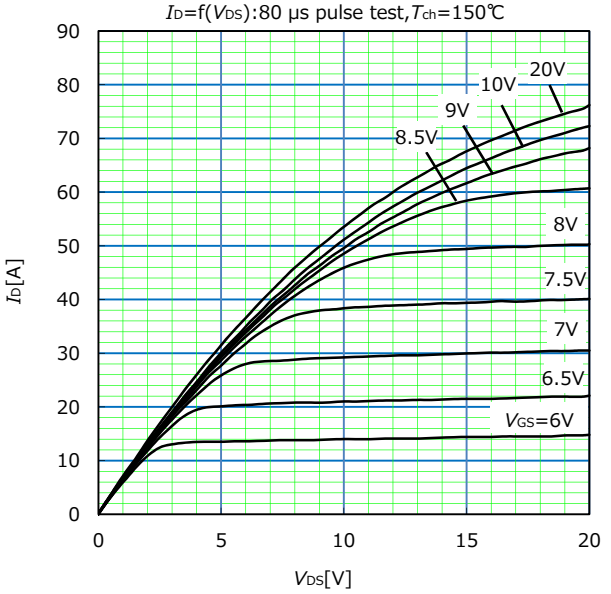



Typical Output Characteristics
$I_D$=f($V_{DS}$):80 μs pulse test,$T_{ch}$=25℃

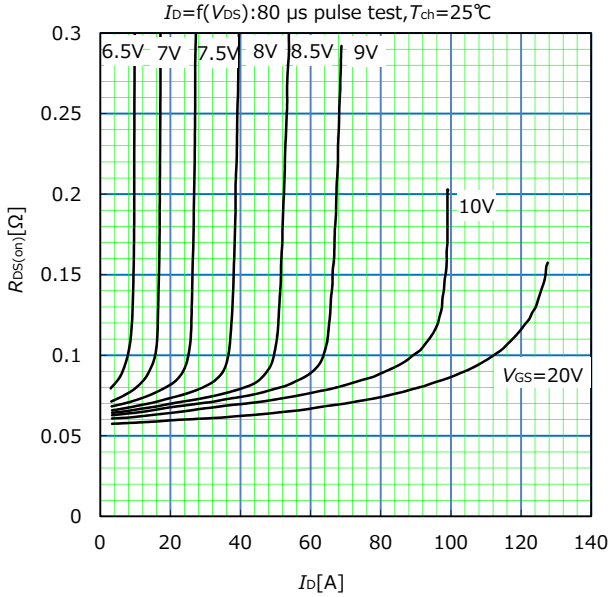



Typical Output Characteristics
$I_D$=f($V_{DS}$):80 μs pulse test,$T_{ch}$=150℃

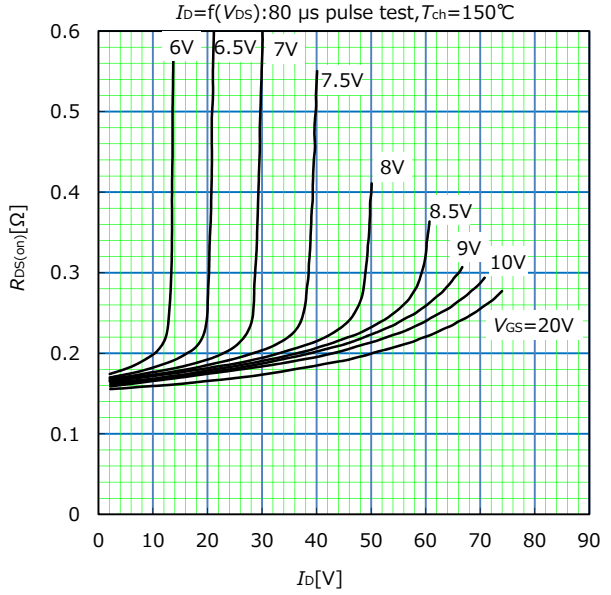


Drain-Source Breakdown Voltage
$BV_{DSS}$=f($T_{ch}$):$I_D$=10mA,$V_{GS}$=0V

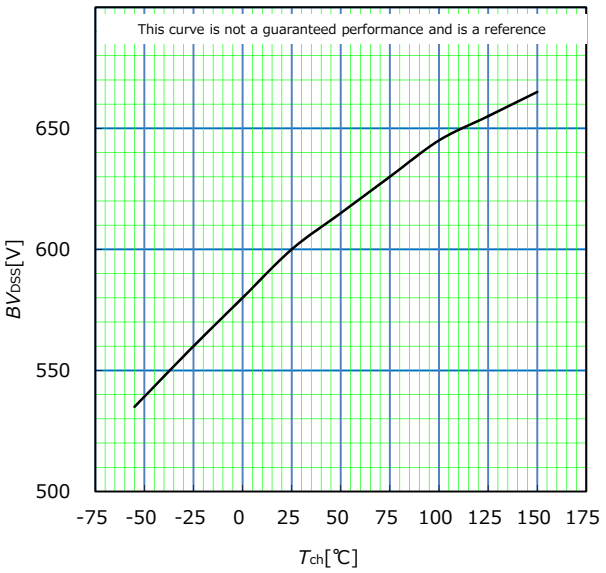



Drain-Source On-state Resistance
$R_{DS(on)}$=f($T_{ch}$):$I_D$=19.7A,$V_{GS}$=10V

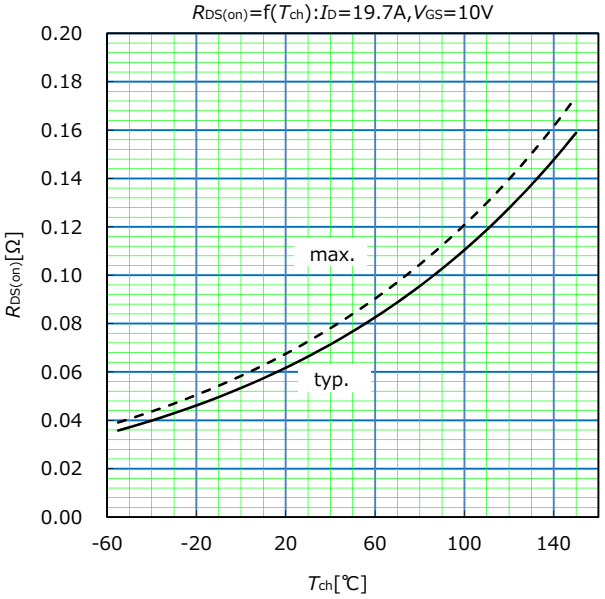



Gate Threshold Voltage vs. $T_{ch}$
$V_{GS(th)}$=f($T_{ch}$) : $V_{DS}$ = $V_{GS}$, $I_D$=2.21mA

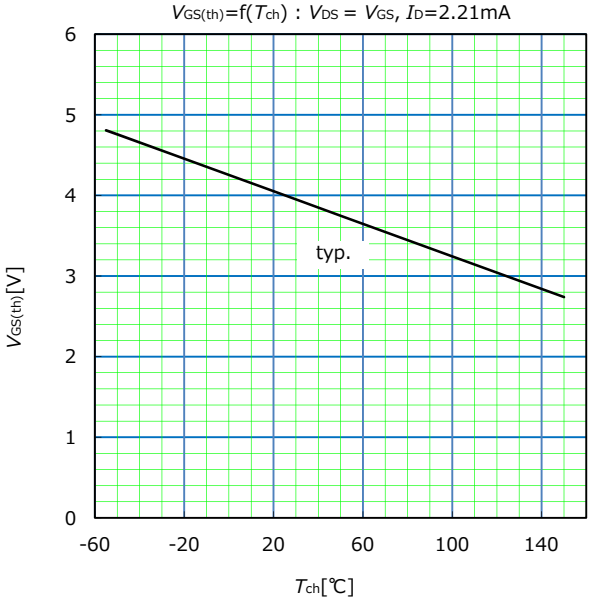



Typical Transfer Characteristic
$I_D$=f($V_{GS}$) : 80μs pulse test, $V_{DS}$=25V

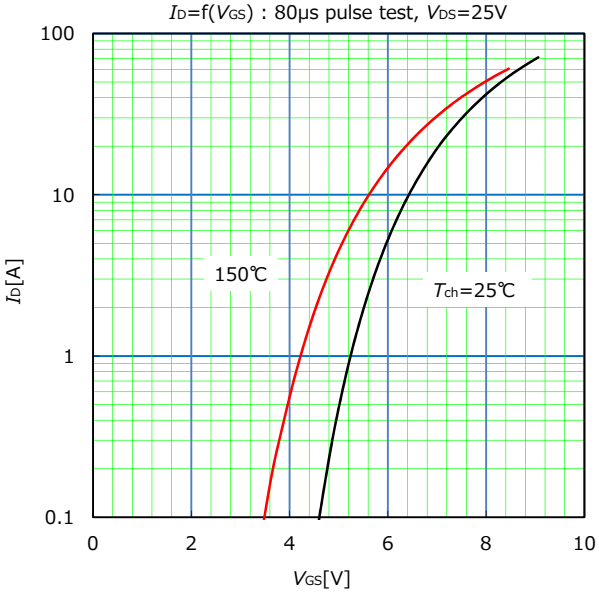



Typical Transconductance
$g_{fs}$=f($I_D$) : 80μs pulse test, $V_{DS}$=25V

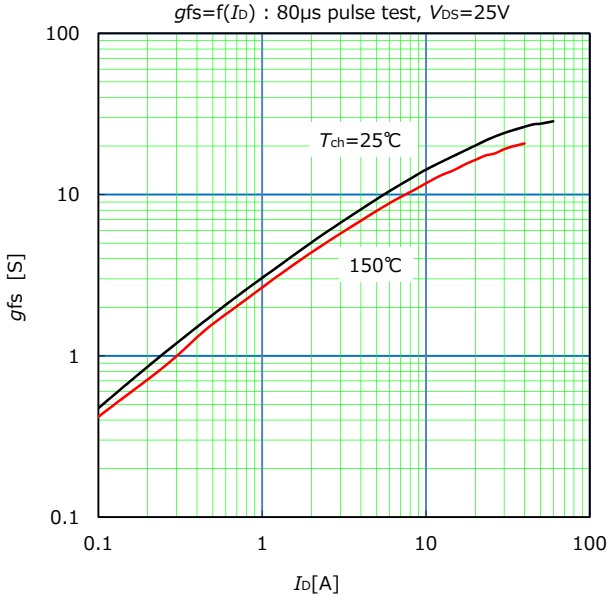



Typical Forward Characteristics of Reverse Diode
$I_{SD}$=f($V_{SD}$):80 μs pulse test

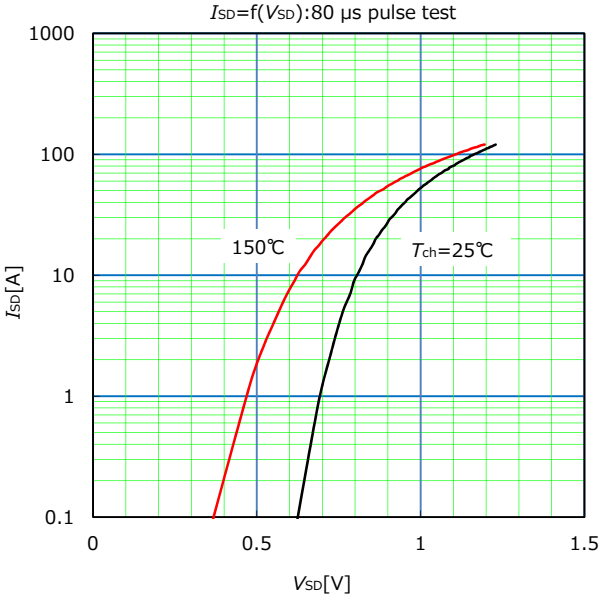


Typical Capacitance
C=f($V_{DS}$) : $V_{GS}$=0V, f=250kHz

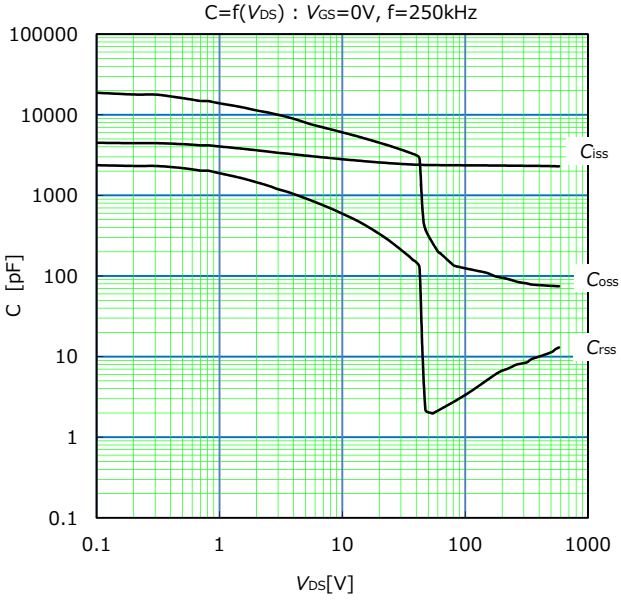



Typical $C_{oss}$ stored energy

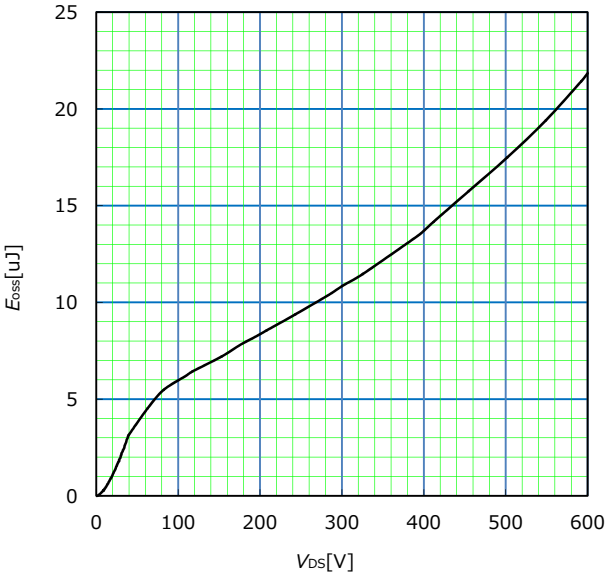



Typical Switching Characteristics vs. $I_D$ $T_{ch}$=25℃
t=f($I_D$):$V_{dd}$=400V,$V_{GS}$=10V/0V,$R_G$=12Ω

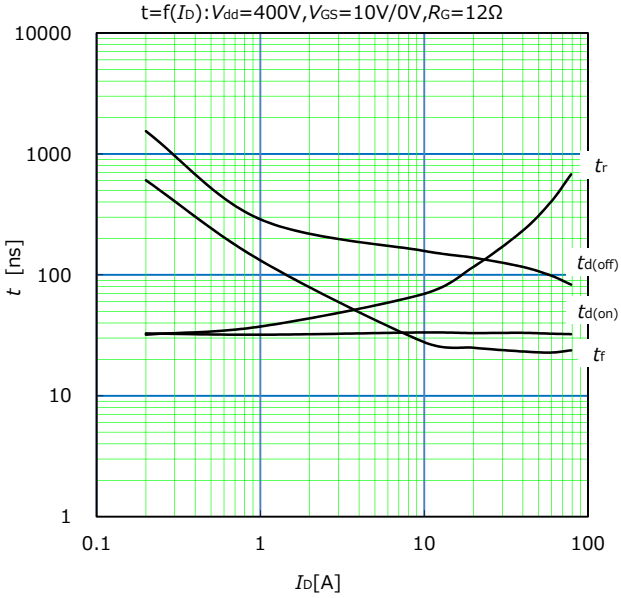



Typical Gate Charge Characteristics
$V_{GS}$=f($Q_G$) : $I_D$=39.4A, $T_{ch}$=25℃

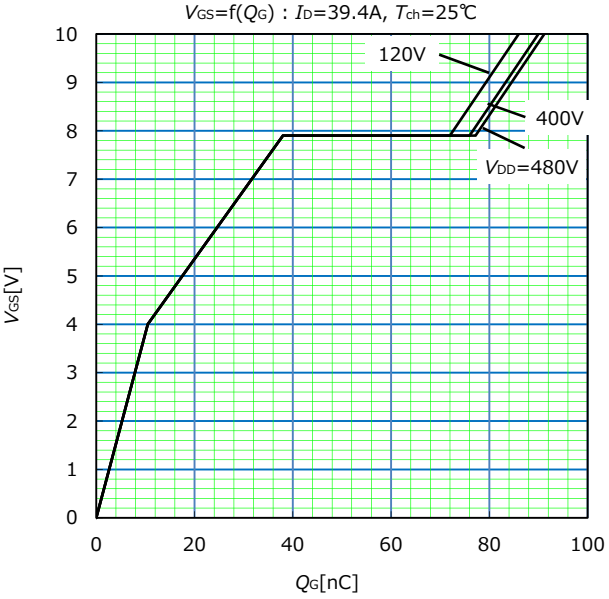


Maximum Avalanche Energy vs. starting $T_{ch}$
$E_{(AV)}$=f(starting $T_{ch}$):$V_{cc}$=60V,$I_{(AV)}$<=6.3A

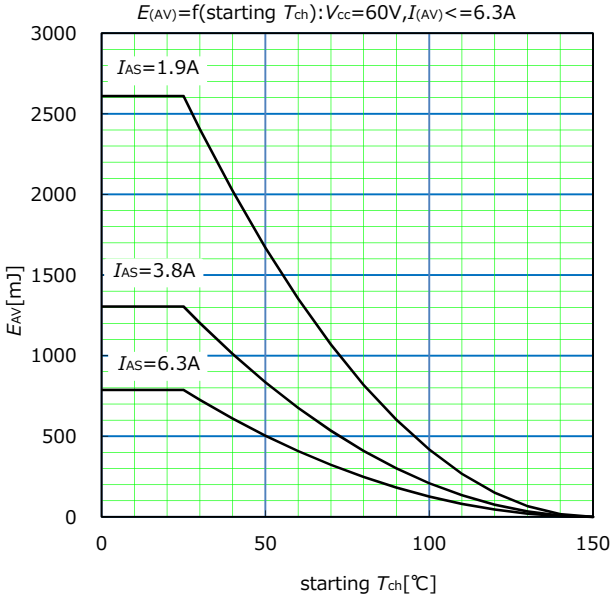


Transient Thermal Impedance
$Z_{th(ch-c)}$=f(t):D=0

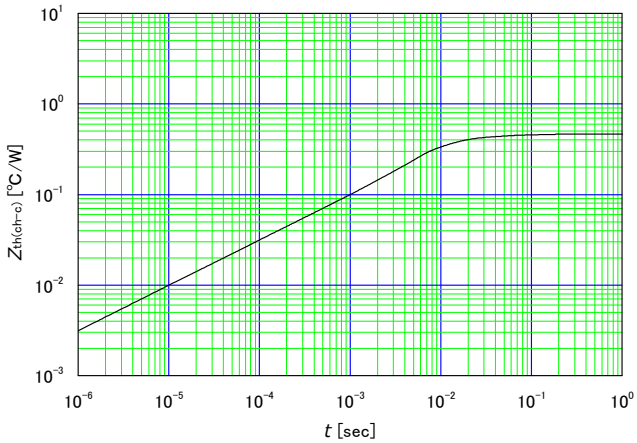

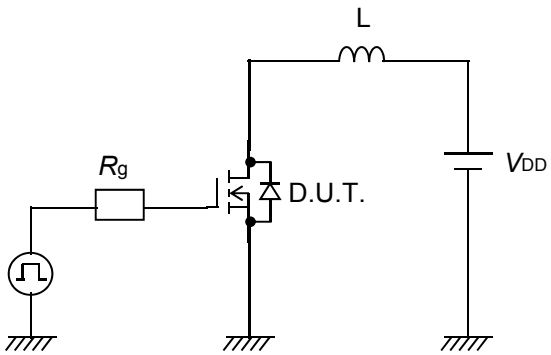



Fig.1 Avalanche Test circuit

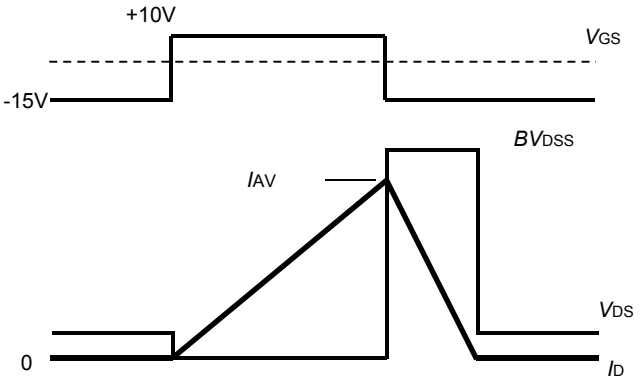



Fig.2 Operating waveforms of Avalanche Test

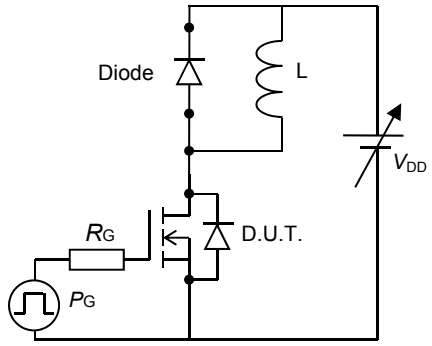



Fig.3 Switching Test circuit

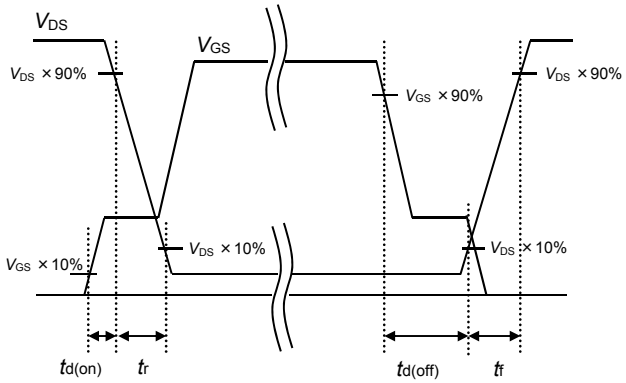



Fig.4 Operating waveform of Switching Test

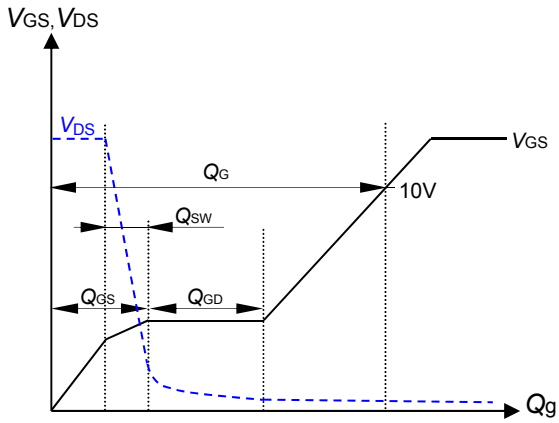



Fig.5 Operating waveform of Gate charge Test

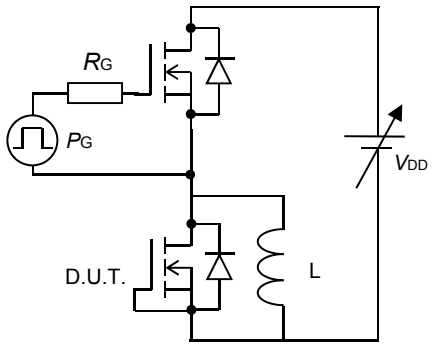



Fig.6 Reverse recovery Test circuit


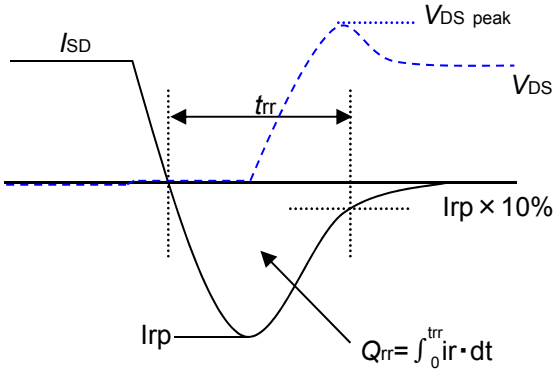



Fig.7 Operating waveform of Reverse recovery Test


## Outview: TO-247-P/TO-247-P2 Package

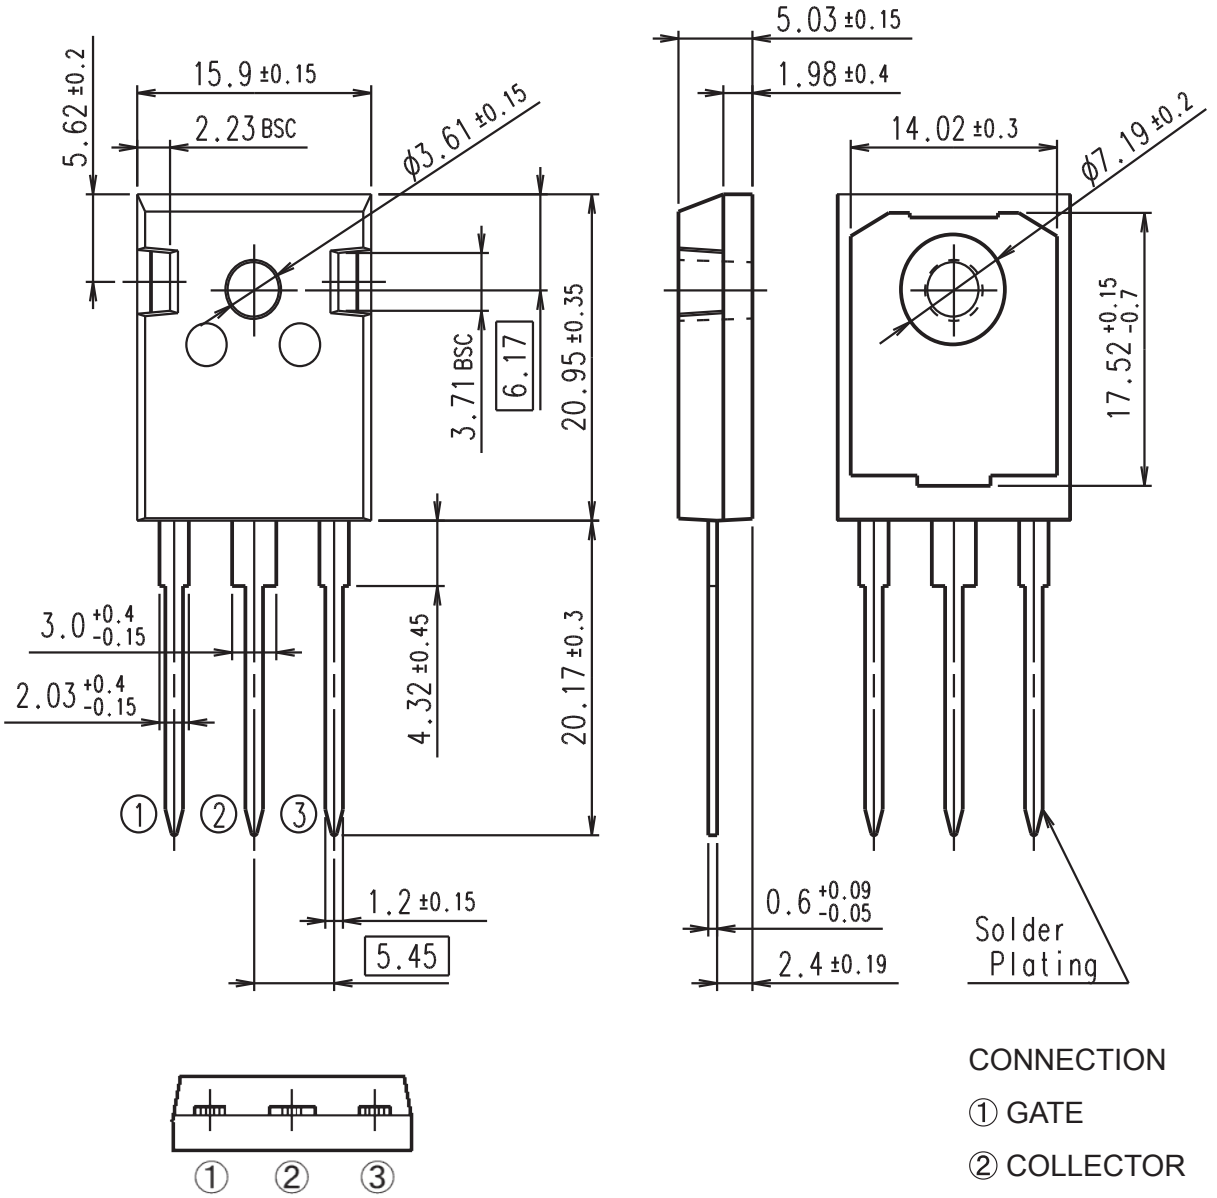


CONNECTION
① GATE
② COLLECTOR
③ EMITTER

DIMENSIONS ARE IN MILLIMETERS.

## Marking

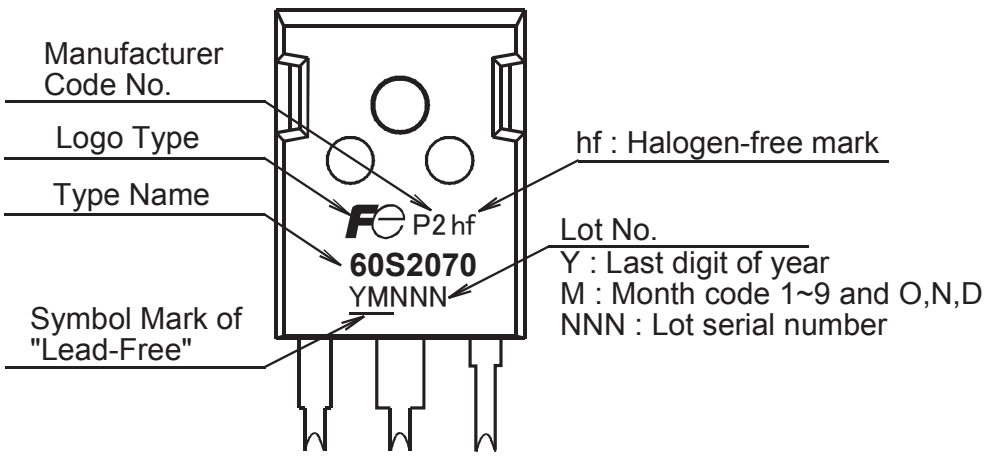


* The font (font type,size) and the logo type size might be actually different.

## WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of March 2017.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sur to obtain the latest specifications.

2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.

3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design failsafe, flame retardant, and free of malfunction.

4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
• Computers • OA equipment • Communications equipment (terminal devices) • Measurement equipment
• Machine tools • Audiovisual equipment • Electrical home appliances • Personal equipment • Industrial robots etc.

5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
• Transportation equipment (mounted on cars and ships) • Trunk communications equipment
• Traffic-signal control equipment • Gas leakage detectors with an auto-shut-off feature
• Emergency equipment for responding to disasters and anti-burglary devices • Safety devices
• Medical equipment

6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
• Space equipment • Aeronautic equipment • Nuclear control equipment
• Submarine repeater equipment

7. Copyright ©1996-2017 by Fuji Electric Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.

8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

# Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

### Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

**www.entegreci.com**

### Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

**Kategorilere göz atın**

### Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

**Üreticileri görün**

### Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

**Teklif isteyin**

**www.entegreci.com** | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.