# MIC38C42/43/44/45

## BiCMOS Current-Mode PWM Controllers

### Features

- Fast 40 ns Output Rise and 30 ns Output Fall Times
- –40°C to +85°C Ambient Temperature Range Meets UC284x Specifications
- High-Performance, Low-Power BiCMOS Process
- Ultra-Low Start-Up Current (50 µA Typical)
- Low Quiescent Operating Current (4 mA Typical)
- CMOS Outputs with Rail-to-Rail Swing
- Up to 500 kHz Current-Mode Operation
- Trimmed 5V Bandgap Reference
- Pin-for-Pin Compatible with UC3842/3843/3844/3845(A)
- Trimmed Oscillator Discharge Current
- UVLO with Hysteresis
- Low Cross-Conduction Currents

### Applications

- Current-Mode, Offline, Switched-Mode Power Supplies
- Current-Mode, DC-to-DC Converters
- Step-Down Buck Regulators
- Step-Up Boost Regulators
- Flyback, Isolated Regulators
- Forward Converters
- Synchronous FET Converters

### General Description

The MIC38C4x are fixed-frequency, high performance, current-mode PWM controllers. Microchip's BiCMOS devices are pin compatible with 384x bipolar devices, but feature several improvements.

Undervoltage lockout circuitry allows the '42 and '44 versions to start up at 14.5V and operate down to 9V, and the '43 and '45 versions start at 8.4V with operation down to 7.6V. All versions operate up to 20V.


When compared to bipolar 384x devices operating from a 15V supply, start-up current has been reduced to 50 µA typical and operating current has been reduced to 4.0 mA typical. Decreased output rise and fall times drive larger MOSFETs, and rail-to-rail output capability increases efficiency, especially at lower supply voltages. The MIC38C4x also features a trimmed oscillator discharge current and bandgap reference.

The MIC38C4x denotes 8-pin plastic DIP, SOIC, and MSOP packages. MIC38C4x-1 denotes 14-pin plastic DIP and SOIC packages. 8-pin devices feature small size, while 14-pin devices separate the analog and power connections for improved performance and power dissipation.


For fast rise and fall times and higher output drive, refer to the MIC38HC4x.

### Package Types

**MIC38C42/43/44/45**
8-Lead SOIC (M)
8-Lead MSOP (MM)
8-Lead DIP (N)

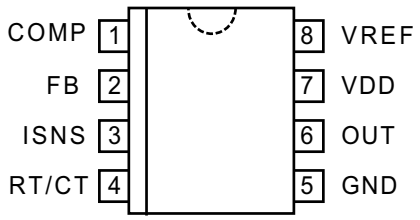



**MIC38C42-1/43-1/44-1/45-1**
14-Lead SOIC (M)
14-Lead DIP (N)

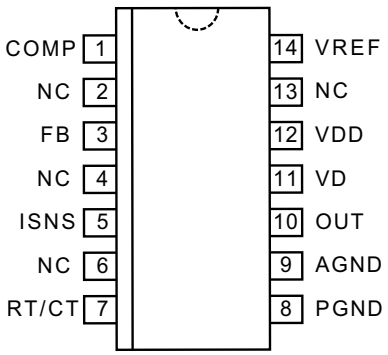


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## Functional Block Diagram

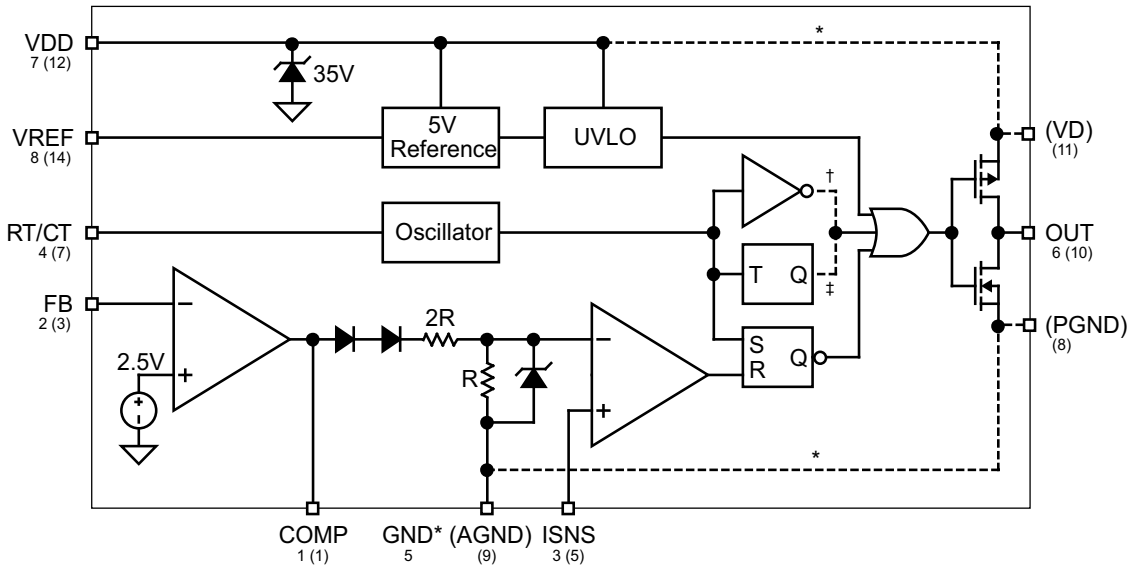


( ) pins are on MIC38C4x-1 (14-lead) versions only
* MIC38C4x, (8-lead) versions only
† MIC38C42, MIC38C43 (96% max. duty cycle) versions only
‡ MIC38C44, MIC38C45 (50% max. duty cycle) versions only


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

# 1.0 ELECTRICAL CHARACTERISTICS

## Absolute Maximum Ratings †

Zener Current ($I_Z$ at VDD Pin)..... 30 mA
Operation at ≥ 18V may require special precautions. See Note 1.
Supply Voltage ($V_{DD}$, Note 1)..... +20V
Switch Supply Voltage ($V_D$)..... +20V
Current Sense Voltage ($V_{ISNS}$) ..... –0.3V to +5.5V
Feedback Voltage ($V_{FB}$)..... –0.3V to +5.5V
Output Current ($I_{OUT}$)..... 0.5A

**† Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Note 1:** On the 8-pin version, 20V is the maximum input on Pin 7 because this is also the supply pin for the output stage. On the 14-pin version, 40V is the maximum for Pin 12 and 20V is the maximum for Pin 11.

© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## ELECTRICAL CHARACTERISTICS

**Electrical Characteristics:** $V_{DD}$ = 15V, Adjust $V_{DD}$ above the start threshold before setting at 15V; $R_T$ = 11.0 kΩ; $C_T$ = 3.3 nF; –40°C ≤ $T_A$ ≤ +85°C; unless noted. Note 1

| Parameter | Symbol | Min. | Typ. | Max. | Units | Conditions |
|---|---|---|---|---|---|---|
| **Reference** | | | | | | |
| Output Voltage | $V_{REF}$ | 4.90 | 5.00 | 5.10 | V | $T_A$ = +25°C, $I_{VREF}$ = 1 mA |
| Line Regulation | $\Delta V_{REF(LINE)}$ | — | 2 | 20 | mV | 12V ≤ $V_{DD}$ ≤ 18V, $I_{VREF}$ = 5 µA, Note 6 |
| Load Regulation | $\Delta V_{REF(LOAD)}$ | — | 1 | 25 | mV | 1 mA ≤ $I_{VREF}$ ≤ 20 mA |
| Temperature Stability | $TC_{VREF}$ | — | 0.2 | — | mV/°C | Note 2 |
| Total Output Variation | $\Delta V_{REF(TOT)}$ | 4.82 | — | 5.18 | V | Line, Load, Temperature, Note 2 |
| Output Noise Voltage | $V_{NOISE}$ | — | 50 | — | µV | 10 Hz ≤ f ≤ 10 kHz, $T_A$ = +25°C, Note 2 |
| Long-Term Stability | $\Delta V_{REF(LT)}$ | — | 5 | 25 | mV | $T_A$ = +125°C, 1000 hours, Note 2 |
| Output Short-Circuit | $I_{VREF(SC)}$ | –30 | –80 | –180 | mA | — |
| **Oscillator** | | | | | | |
| Initial Accuracy | $\Delta f_{OSC(INIT)}$ | 49 | 52 | 55 | kHz | $T_A$ = +25°C, Note 3 |
| Voltage Stability | $\Delta f_{OSC(VS)}$ | — | 0.2 | 1.0 | % | 12V ≤ $V_{DD}$ ≤ 18V, Note 6 |
| Temperature Stability | $TC_{FOSC}$ | — | 0.04 | — | %/°C | $T_{MIN}$ ≤ $T_A$ ≤ $T_{MAX}$, Note 2 |
| Clock Ramp Reset Current | $I_{DISCHG}$ | 6.0 | 8.4 | 9.0 | mA | $T_A$ = +25°C, $V_{RT/CT}$ = 2V |
| | | 6.0 | 8.4 | 9.5 | mA | $T_A$ = $T_{MIN}$ to $T_{MAX}$ |
| Amplitude | $V_{AMP}$ | — | 1.9 | — | $V_{PP}$ | $V_{RT/CT}$ peak-to-peak |
| **Error Amp** | | | | | | |
| Input Voltage | $V_{IN(EA)}$ | 2.42 | 2.50 | 2.58 | V | $V_{COMP}$ = 2.5V |
| Input Bias Current | $I_{BIAS(EA)}$ | — | –0.1 | –2 | µA | $V_{FB}$ = 5.0V |
| Open Loop Voltage Gain | $A_{VOL}$ | 65 | 90 | — | dB | 2V ≤ $V_{COMP}$ ≤ 4V |
| Unity Gain Bandwidth | GBW | 0.7 | 1.0 | — | MHz | Note 2 |
| Power Supply Rejection Ratio | $PSRR_{EA}$ | 60 | — | — | dB | 12V ≤ $V_{DD}$ ≤ 18V |
| Output Sink Current | $I_{COMP(SINK)}$ | 2 | 14 | — | mA | $V_{FB}$ = 2.7V, $V_{COMP}$ = 1.1V |
| Output Source Current | $I_{COMP(SRC)}$ | –0.5 | –1 | — | mA | $V_{FB}$ = 2.3V, $V_{COMP}$ = 5V |
| COMP High Voltage | $V_{COMP_H}$ | 5 | 6.8 | — | V | $V_{FB}$ = 2.3V, $R_{LOAD}$ = 15 kΩ to ground |
| COMP Low Voltage | $V_{COMP_L}$ | — | 0.1 | 1.1 | V | $V_{FB}$ = 2.7V, $R_{LOAD}$ = 15 kΩ to $V_{REF}$ |
| **Current Sense** | | | | | | |
| Divider Gain Input-to-Output | $A_{DIV}$ | 2.85 | 3.0 | 3.15 | V/V | Note 4, Note 5 |
| Maximum Threshold | $V_{TH(MAX)}$ | 0.9 | 1 | 1.1 | V | $V_{COMP}$ = 5V, Note 4 |
| Power Supply Rejection Ratio | $PSRR_{CS}$ | — | 70 | — | dB | 12V ≤ $V_{DD}$ ≤ 18V, Note 4 |
| Input Bias Current | $I_{BIAS(CS)}$ | — | –0.1 | –2 | µA | — |
| Delay to Output | $t_D$ | — | 120 | 250 | ns | — |
| **Output** | | | | | | |
| $R_{DS(ON)}$ Pull High | $R_{DSON_H}$ | — | 20 | — | Ω | $I_{SOURCE}$ = 200 mA |
| $R_{DS(ON)}$ Pull Low | $R_{DSON_L}$ | — | 11 | — | Ω | $I_{SINK}$ = 200 mA |
| Rise Time | $t_R$ | — | 40 | 80 | ns | $T_A$ = +25°C, $C_{LOAD}$ = 1 nF |
| Fall Time | $t_F$ | — | 30 | 60 | ns | $T_A$ = +25°C, $C_{LOAD}$ = 1 nF |


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## ELECTRICAL CHARACTERISTICS (CONTINUED)

**Electrical Characteristics:** $V_{DD}$ = 15V, Adjust $V_{DD}$ above the start threshold before setting at 15V; $R_T$ = 11.0 kΩ; $C_T$ = 3.3 nF; –40°C ≤ $T_A$ ≤ +85°C; unless noted. Note 1

| Parameter | Symbol | Min. | Typ. | Max. | Units | Conditions |
|---|---|---|---|---|---|---|
| **Undervoltage Lockout** | | | | | | |
| Start Threshold | $V_{TH(ST)}$ | 13.5 | 14.5 | 15.5 | V | MIC38C42/44 |
| | | 7.8 | 8.4 | 9.0 | V | MIC38C43/45 |
| Minimum Operating Voltage | $V_{DD(MIN)}$ | 8 | 9 | 10 | V | MIC38C42/44 |
| | | 7.0 | 7.6 | 8.2 | V | MIC38C43/45 |
| **Pulse Width Modulator** | | | | | | |
| Maximum Duty Cycle | $D_{MAX}$ | 94 | 96 | — | % | MIC38C42/43 |
| | | 46 | 50 | — | % | MIC38C44/45 |
| Minimum Duty Cycle | $D_{MIN}$ | — | — | 0 | % | — |
| **Total Standby Current** | | | | | | |
| Start-Up Current | $I_{DD(START)}$ | — | 50 | 200 | µA | $V_{DD}$ = 13V for MIC38C42/44 |
| | | | | | | $V_{DD}$ = 7.5V for MIC38C43/45 |
| Operating Supply Current | $I_{DD(Q)}$ | — | 4.0 | 6.0 | mA | $V_{FB}$ = $V_{ISNS}$ = 0V |
| Zener Voltage at VDD Pin | $V_Z$ | 30 | 37 | — | V | $I_{DD}$ = 25 mA, Note 6 |

**Note 1:** Specification for packaged product only.

**2:** These parameters, although guaranteed, are not 100% tested in production.

**3:** Output frequency equals oscillator frequency for the MIC38C42 and MIC38C43. Output frequency for the MIC38C44 and MIC38C45 equals one-half the oscillator frequency.

**4:** Parameter measured at trip point of latch with $V_{FB}$ = 0V.

**5:** Gain defined as Equation 1-1; 0V ≤ $V_{TH(ISNS)}$ ≤ 0.8V.

**6:** On the 8-pin version, 20V is the maximum input on Pin 7 because this is also the supply pin for the output stage. On the 14-pin version, 40V is the maximum for Pin 12 and 20V is the maximum for Pin 11.

**EQUATION 1-1:**

$$A_{DIV} = \frac{\Delta V_{COMP}}{\Delta V_{TH(ISNS)}}$$

© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## TEMPERATURE SPECIFICATIONS (Note 1)

| Parameters | Sym. | Min. | Typ. | Max. | Units | Conditions |
|---|---|---|---|---|---|---|
| **Temperature Ranges** | | | | | | |
| Storage Temperature Range | $T_S$ | –65 | — | +150 | °C | — |
| Operating Ambient Temperature Range | $T_A$ | –40 | — | +85 | °C | — |
| Operating Junction Temperature Range | $T_J$ | –40 | — | +125 | °C | — |
| Maximum Junction Temperature | $T_{J(MAX)}$ | — | — | +150 | °C | — |
| **Package Thermal Resistance** | | | | | | |
| Thermal Resistance 8-Ld Plastic DIP | $\theta_{JA}$ | — | 125 | — | °C/W | — |
| Thermal Resistance 8-Ld MSOP | $\theta_{JA}$ | — | 250 | — | °C/W | — |
| Thermal Resistance 8-Ld SOIC | $\theta_{JA}$ | — | 170 | — | °C/W | — |
| Thermal Resistance 14-Ld Plastic DIP | $\theta_{JA}$ | — | 90 | — | °C/W | — |
| Thermal Resistance 14-Ld SOIC | $\theta_{JA}$ | — | 145 | — | °C/W | — |

**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., $T_A$, $T_J$, $\theta_{JA}$). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

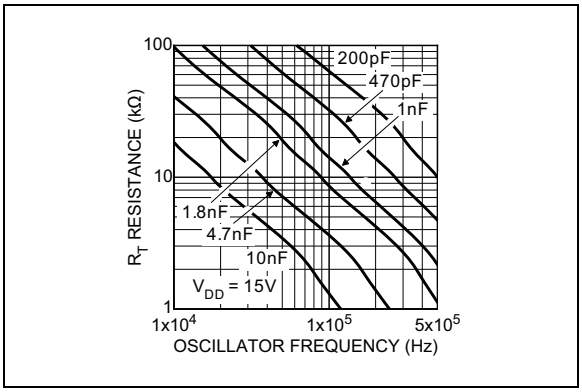



***FIGURE 2-1:*** *Oscillator Frequency Configuration.*

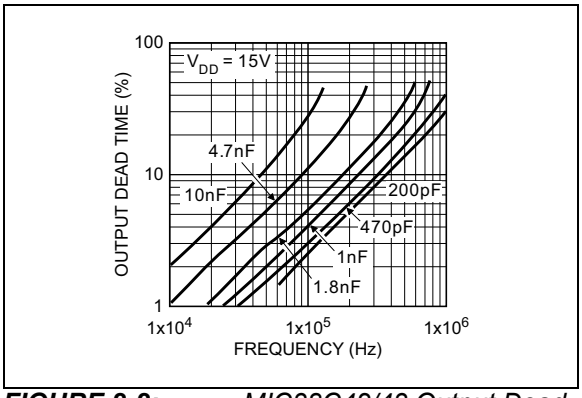



***FIGURE 2-2:*** *MIC38C42/43 Output Dead Time vs. Oscillator Frequency.*

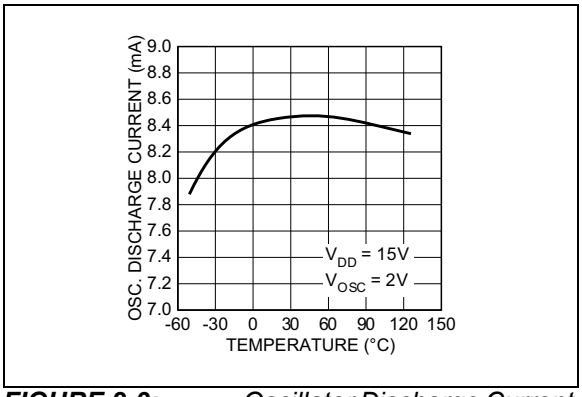



***FIGURE 2-3:*** *Oscillator Discharge Current vs. Temperature.*

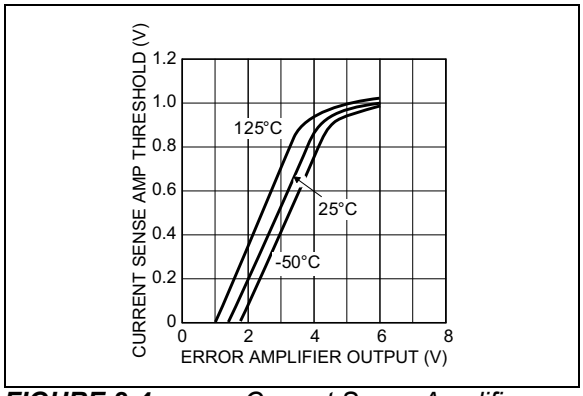



***FIGURE 2-4:*** *Current Sense Amplifier Threshold vs. Error Amplifier Output.*

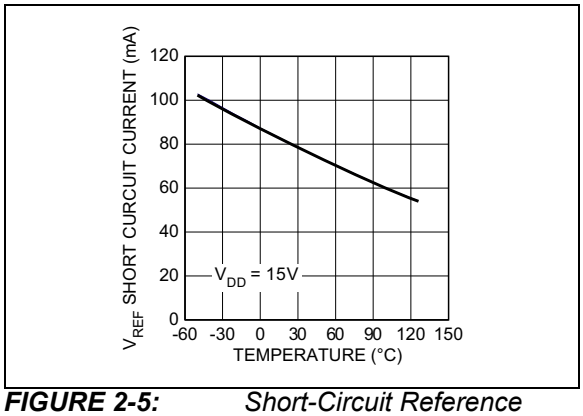



***FIGURE 2-5:*** *Short-Circuit Reference Current vs. Temperature.*

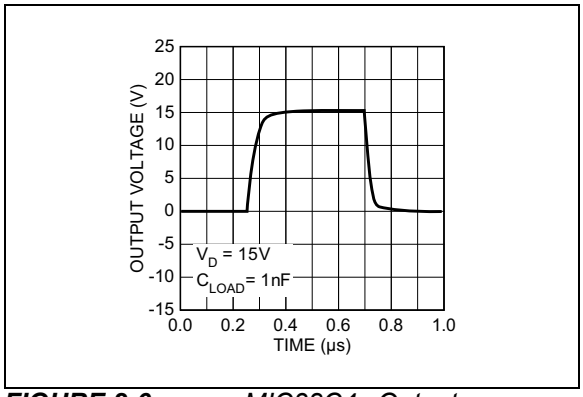



***FIGURE 2-6:*** *MIC38C4x Output Waveform.*

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1.

**TABLE 3-1: PIN FUNCTION TABLE**

| Pin Number 8-Pin DIP, SOIC, MSOP | Pin Number 14-Pin DIP and SOIC | Pin Name | Description |
|---|---|---|---|
| 1 | 1 | COMP | Compensation: Connect external compensation network to modify the error amplifier output. |
| — | 2 | NC | Not internally connected. |
| 2 | 3 | FB | Feedback (Input): Error amplifier input. Feedback is 2.5V at desired output voltage. |
| — | 4 | NC | Not internally connected. |
| 3 | 5 | ISNS | Current Sense (Input): Current sense comparator input. Connect to current sensing resistor or current transformer. |
| — | 6 | NC | Not internally connected. |
| 4 | 7 | RT/CT | Timing Resistor/Timing Capacitor: Connect external RC network to select switching frequency. |
| 5 | — | GND | Ground: Combined analog and power ground. |
| — | 8 | PGND | Power Ground: N-channel driver transistor ground. |
| — | 9 | AGND | Analog Ground: Controller circuitry ground. |
| 6 | 10 | OUT | Gate Driver Output: Totem-pole output. |
| — | 11 | VD | Power Supply (Input): P-channel driver transistor supply input. Return to power ground (PGND). |
| 7 | 12 | VDD | Analog Supply (Input): Controller circuitry supply input. Return to analog ground (AGND). |
| — | 13 | NC | Not internally connected. |
| 8 | 14 | VREF | 5V Reference (Output): Connect external RC network. |


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## 4.0 FUNCTIONAL DESCRIPTION

Familiarity with 384x converter designs is assumed.

### 4.1 MIC38C4x Advantages

#### 4.1.1 START-UP CURRENT

Start-up current has been reduced to an ultra-low 50 µA (typical) permitting higher-resistance, lower-wattage, start-up resistors (powers controller during power supply start-up). The reduced resistor wattage reduces cost and printed circuit space.

#### 4.1.2 OPERATING CURRENT

Quiescent operating current has been reduced to 4 mA compared to 11 mA for a typical bipolar controller. The controller runs cooler and the $V_{DD}$ hold-up capacitance required during start-up may be reduced.

#### 4.1.3 OUTPUT DRIVER

Complementary internal P-channel and N-channel MOSFETs produce rail-to-rail output voltages for better performance driving external power MOSFETs. The driver transistor's low on resistance and high peak current capability can drive gate capacitances of greater than 1000 pF. The value of output capacitance which can be driven is determined only by the rise/fall time requirements. Within the restrictions of output capacity and controller power dissipation, maximum switching frequency can approach 500 kHz.

### 4.2 Design Precautions

When operating near 20V, circuit transients can easily exceed the 20V absolute maximum rating, permanently damaging the controller's CMOS construction. To reduce transients, connect a 0.1 µF low-ESR capacitor to next to the controller's supply $V_{DD}$ (or $V_D$ for '-1' versions) and ground connections. Film type capacitors, such as Wima MKS2, are recommended.

When designing high-frequency converters, avoid capacitive and inductive coupling of the switching waveform into high impedance circuitry such as the error amplifier, oscillator, and current sense amplifier. Avoid long printed-circuit traces and component leads. Locate oscillator and compensation circuitry near the IC. Use high frequency decoupling capacitors on $V_{REF}$, and if necessary, on $V_{DD}$. Return high di/dt currents directly to their source and use large area ground planes.

### 4.3 Buck Converter

Refer to Figure 4-1. When at least 26V is applied to the input, C5 is charged through R2 until the voltage $V_{DD}$ is greater than 14.5V (the undervoltage lockout value of the MIC38C42). Output switching begins when Q1 is turned on by the gate drive transformer T1, charging the output filter capacitor C3 through L1. D5 supplies a regulated +12V to $V_{DD}$ once the circuit is running.

Current sense transformer CT1 provides current feedback to ISNS for current-mode operation and cycle-by-cycle current limiting. This is more efficient than a high-power sense resistor and provides the required ground-referenced level shift.

When Q1 turns off, current flow continues from ground through D1 and L1 until Q1 is turned on again.

The 100V Schottky diode D1 reduces the forward voltage drop in the main current path, resulting in higher efficiency than could be accomplished using an ultra-fast-recovery diode. R1 and C2 suppress parasitic oscillations from D1.

Using a high-value inductance for L1 and a low-ESR capacitor for C3 permits small capacitance with minimum output ripple. This inductance value also improves circuit efficiency by reducing the flux swing in L1.

Magnetic components are carefully chosen for minimal loss at 500 kHz. CT1 and T1 are wound on Magnetics, Inc. P-type material toroids. L1 is wound on a Siemens N49 EFD core.

**TABLE 4-1: MAGNETIC COMPONENTS**

| Symbol | Custom Coils (Note 1) | ETS (Note 2) |
|---|---|---|
| CT1 | 4923 | ETS 92420 |
| T1 | 4924 | ETS 92419 |
| L1 | 4925 | ETS 92421 |

**Note 1:** Custom Coils, Alcester, SD. Tel: (605) 934-2460.

**2:** Energy Transformation Systems, Inc. Tel: (510) 656-2012.

**TABLE 4-2: COMPONENT TEST RESULTS**

| Test | Conditions | Results |
|---|---|---|
| Line Regulation | $V_{IN}$ = 26V to 80V, $V_{OUT}$ = 12V, $I_O$ = 2A | 0.5% |
| Load Regulation | $V_{IN}$ = 48V, $V_{OUT}$ = 12V, $I_O$ = 0.2A to 2A | 0.6% |
| Efficiency | $V_{IN}$ = 48V, $V_{OUT}$ = 12V, $I_O$ = 2A | 90% |
| Output Ripple | $V_{IN}$ = 48V, $V_{OUT}$ = 12V, $I_O$ = 2A (20 MHz BW) | 100 mV |

© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

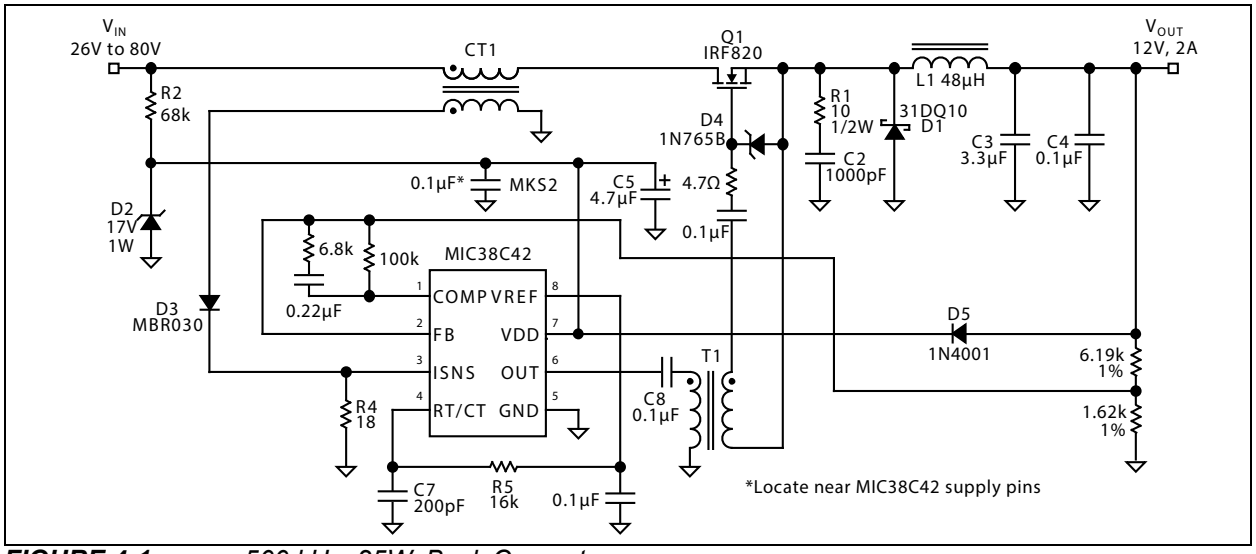



***FIGURE 4-1:*** *500 kHz, 25W, Buck Converter.*

## 4.4 Synchronous Buck Converter

Refer to Figure 4-2. This MIC38C43 synchronous buck converter uses an MIC5022 half-bridge driver to alternately drive the PWM switch MOSFET (driven by GATEH, or high-side output) and a MOSFET which functions as a synchronous rectifier (driven by the GATEL, or low-side output).

The low-side MOSFET turns on when the high-side MOSFET is off, allowing current to return from ground. Current flows through the low-side MOSFET in the source to drain direction.

The on-state voltage drop of the low-side MOSFET is lower than the forward voltage drop of an equivalent Schottky rectifier. This lower voltage drop results in higher efficiency.

A sense resistor (5 mΩ) is connected to the driver's high-side current sense inputs to provide overcurrent protection. Refer to the MIC5020, MIC5021, and MIC5022 data sheets for more information.

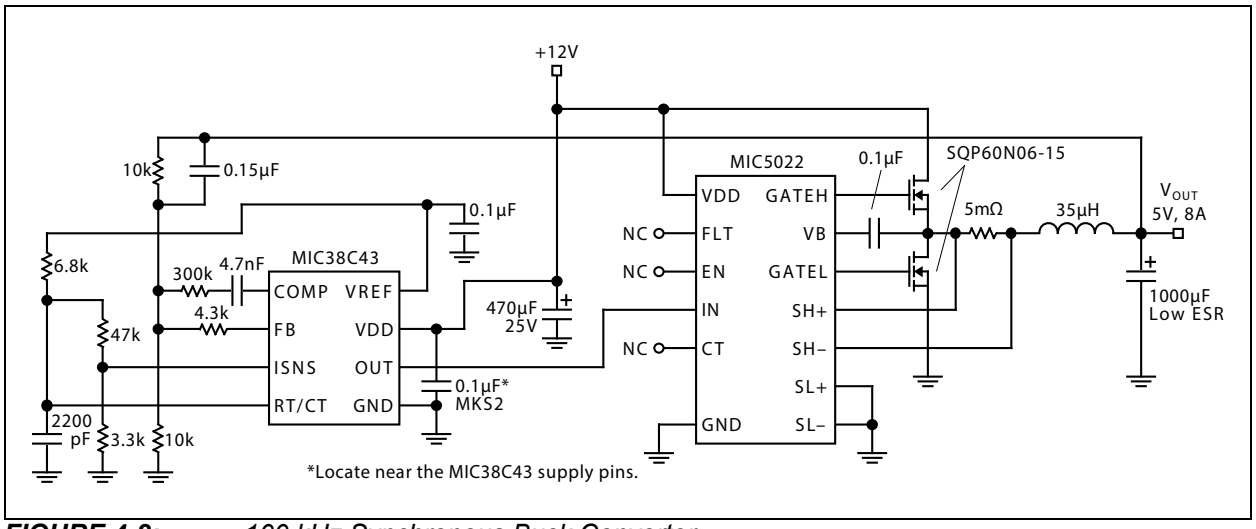




***FIGURE 4-2:*** *100 kHz Synchronous Buck Converter.*


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries


## 5.0 PACKAGING INFORMATION

### 5.1 Package Marking Information

8-Lead SOIC*





Example




14-Lead SOIC*





Example





8-Lead DIP*





Example





14-Lead DIP*





Example




8-Lead MSOP*
(Front)




Example




8-Lead MSOP*
(Back)




Example




| | | |
|---|---|---|
| **Legend:** | XX...X | Product code or customer-specific information |
| | Y | Year code (last digit of calendar year) |
| | YY | Year code (last 2 digits of calendar year) |
| | WW | Week code (week of January 1 is week ‘01’) |
| | NNN | Alphanumeric traceability code |
| | (e3) | Pb-free JEDEC® designator for Matte Tin (Sn) |
| | * | This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package. |
| | ●, ▲, ▼ | Pin one index is identified by a dot, delta up, or delta down (triangle mark). |
| **Note**: | In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo. | |
| | Underbar (_) and/or Overbar (¯) symbol may not be to scale. | |


**Note:** If the full seven-character YYWWNNN code cannot fit on the package, the following truncated codes are used based on the available marking space:
6 Characters = YWWNNN; 5 Characters = WWNNN; 4 Characters = WNNN; 3 Characters = NNN;
2 Characters = NN; 1 Character = N

© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## 8-Lead SOIC Package Outline and Recommended Land Pattern

**TITLE**
8 LEAD SOICN PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

| DRAWING # | SOICN-8LD-PL-1 | UNIT | INCH [MM] |
|---|---|---|---|

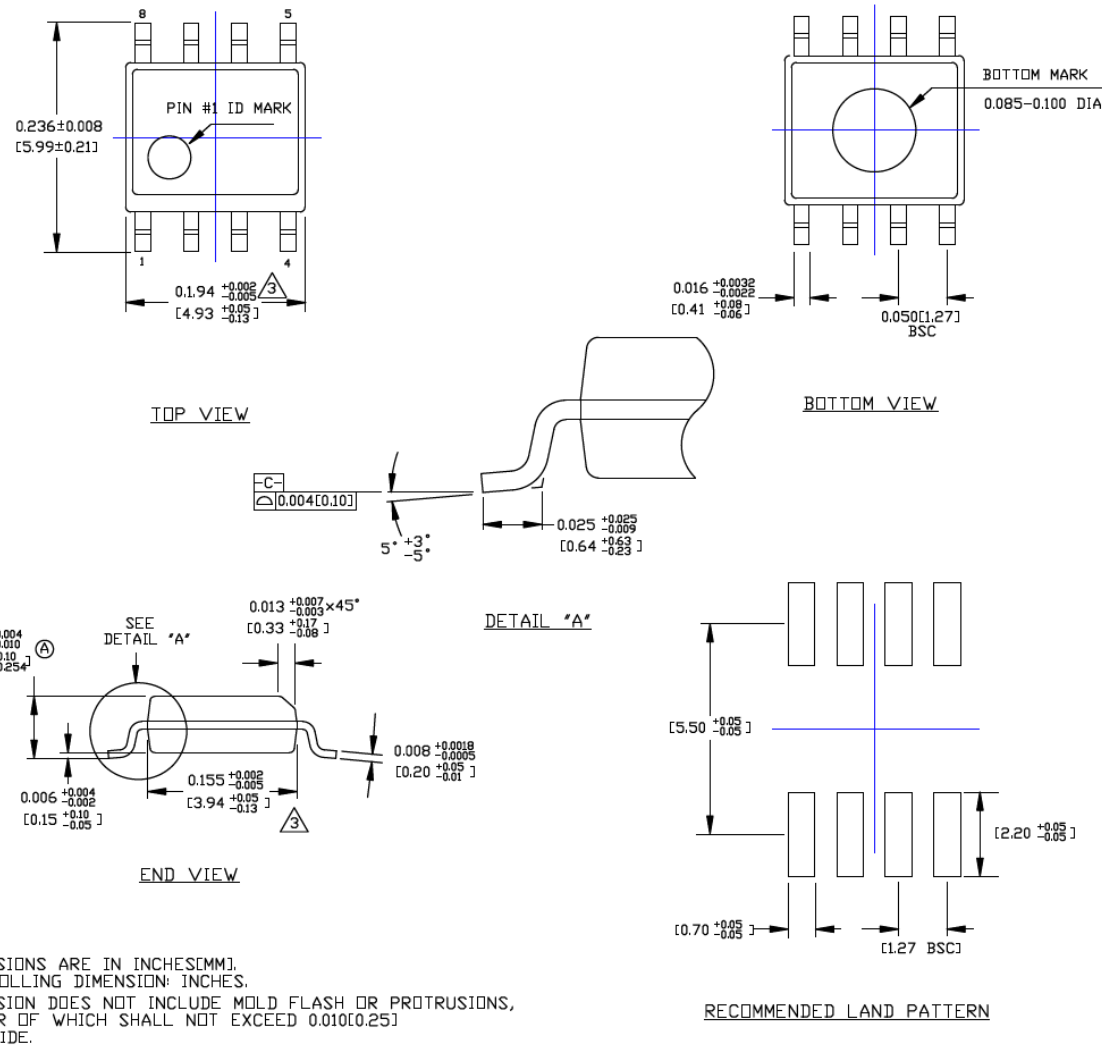


NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.010[0.25] PER SIDE.


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## 8-Lead MSOP Package Outline and Recommended Land Pattern

**TITLE**
8 LEAD MSOP PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

| DRAWING # | MSOP-8LD-PL-1 | UNIT | INCH [MM] |
|---|---|---|---|

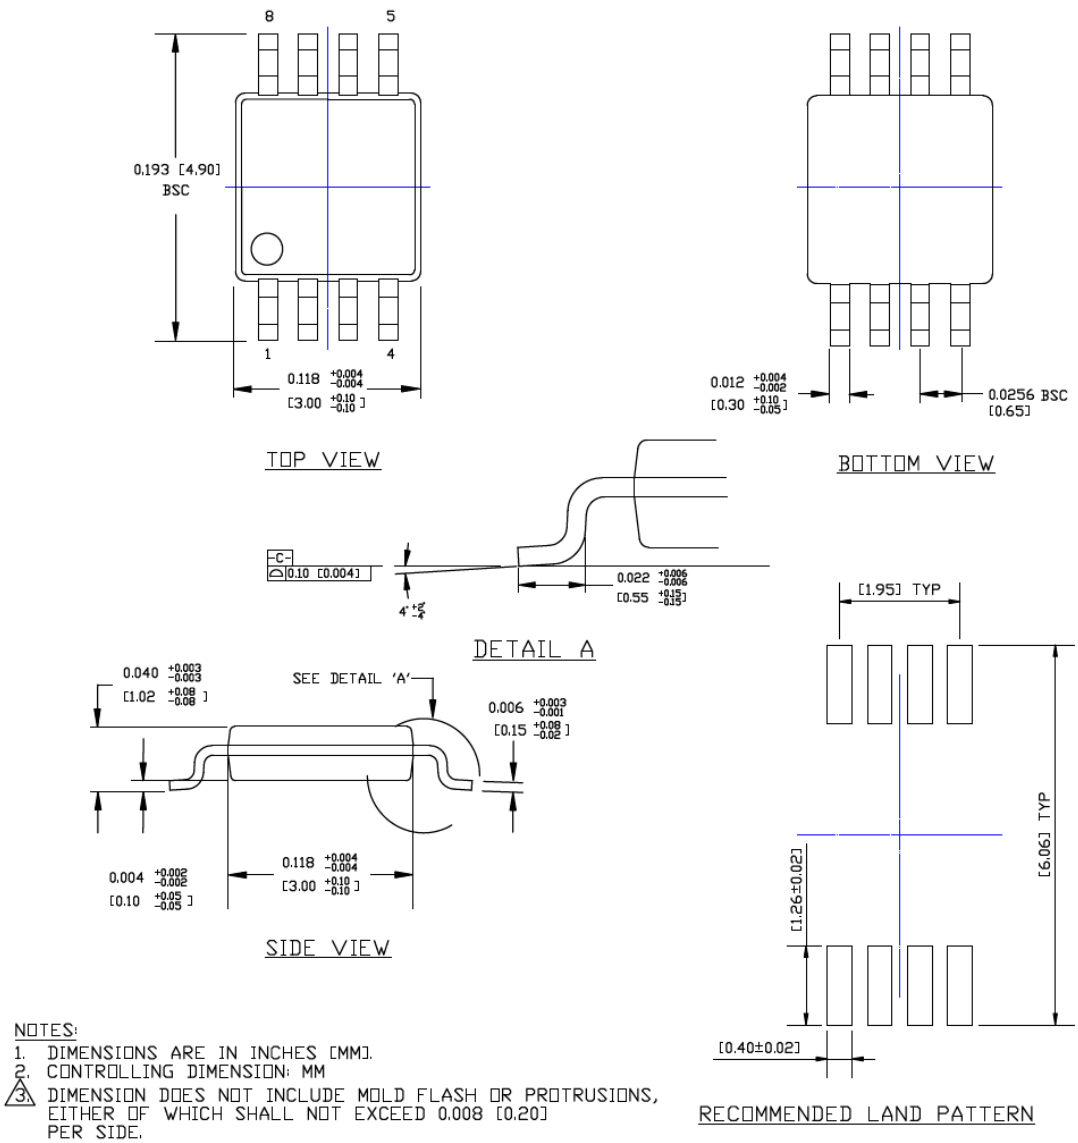



NOTES:
1. DIMENSIONS ARE IN INCHES [MM].
2. CONTROLLING DIMENSION: MM
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.008 [0.20] PER SIDE.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

## 8-Lead DIP Package Outline and Recommended Land Pattern

**TITLE**
8 LEAD PDIP PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

| DRAWING # | PDIP-8LD-PL-1 | UNIT | INCH |
|---|---|---|---|
| Lead Frame | Copper | Lead Finish | Matte Tin |

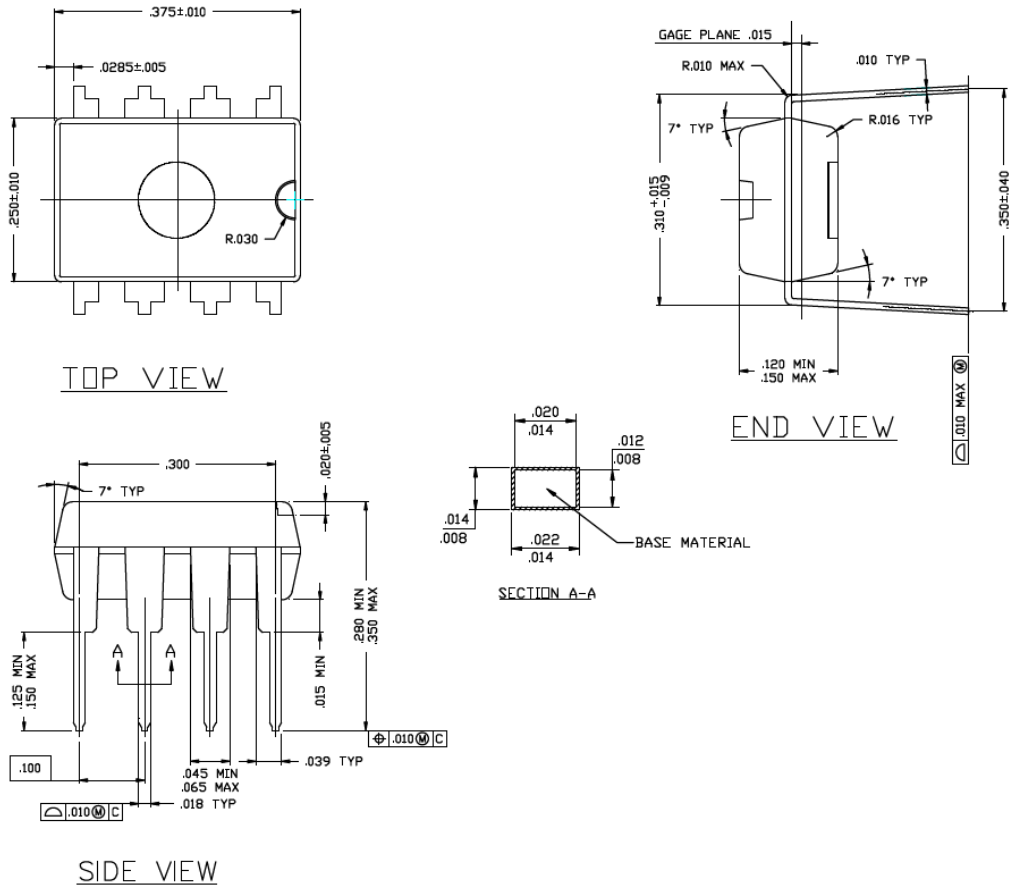



Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## 14-Lead SOIC Package Outline and Recommended Land Pattern

**14-Lead Plastic Small Outline (D3X, UEB, M5B, UEB) - Narrow, 3.90 mm Body [SOIC]**
**Atmel Legacy Global Package Code SVQ**


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

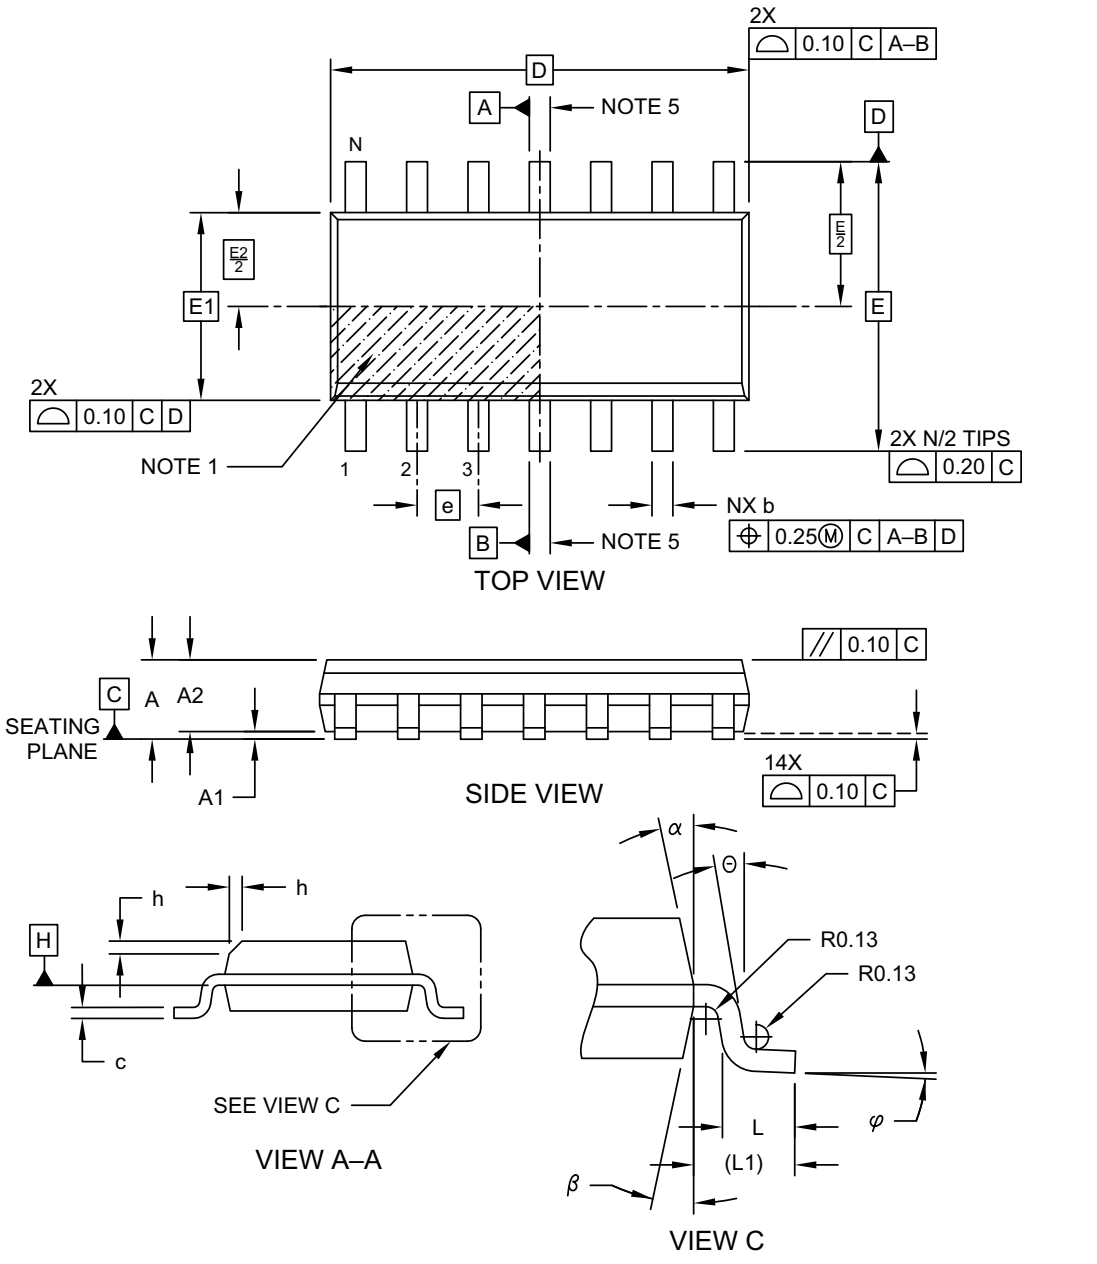


Microchip Technology Drawing No. C04-065-D3X Rev D

**14-Lead Plastic Small Outline (D3X, UEB, M5B, UEB) - Narrow, 3.90 mm Body [SOIC]**
**Atmel Legacy Global Package Code SVQ**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

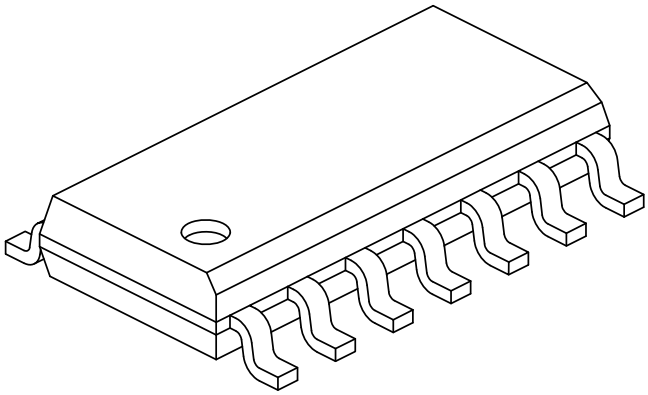

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Pins | N | | 14 | |
| Pitch | e | | 1.27 BSC | |
| Overall Height | A | - | - | 1.75 |
| Molded Package Thickness | A2 | 1.25 | - | - |
| Standoff § | A1 | 0.10 | - | 0.25 |
| Overall Width | E | | 6.00 BSC | |
| Molded Package Width | E1 | | 3.90 BSC | |
| Overall Length | D | | 8.65 BSC | |
| Chamfer (Optional) | h | 0.25 | - | 0.50 |
| Foot Length | L | 0.40 | - | 1.27 |
| Footprint | L1 | | 1.04 REF | |
| Lead Angle | Θ | 0° | - | - |
| Foot Angle | φ | 0° | - | 8° |
| Lead Thickness | c | 0.10 | - | 0.25 |
| Lead Width | b | 0.31 | - | 0.51 |
| Mold Draft Angle Top | α | 5° | - | 15° |
| Mold Draft Angle Bottom | β | 5° | - | 15° |

Notes:


1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimension D does not include mold flash, protrusions or gate burrs, which shall not exceed 0.15 mm per end. Dimension E1 does not include interlead flash or protrusion, which shall not exceed 0.25 mm per side.
4. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.
5. Datums A & B to be determined at Datum H.

Microchip Technology Drawing No. C04-065-D3X Rev D Sheet 2 of 2


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

**14-Lead Plastic Small Outline (D3X, UEB, M5B, UEB) - Narrow, 3.90 mm Body [SOIC]**
**Atmel Legacy Global Package Code SVQ**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

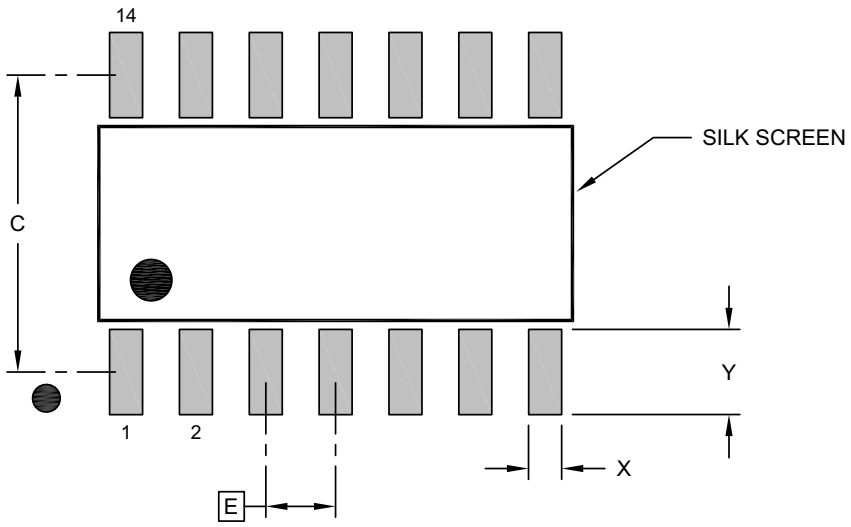


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 1.27 BSC | |
| Contact Pad Spacing | C | | 5.40 | |
| Contact Pad Width (X14) | X | | | 0.60 |
| Contact Pad Length (X14) | Y | | | 1.55 |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing No. C04-2065-D3X Rev D

© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## 14-Lead DIP Package Outline and Recommended Land Pattern

**TITLE**
14 LEAD PDIP PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

| DRAWING # | PDIP-14LD-PL-1 | UNIT | INCH |
|---|---|---|---|
| LEAD FRAME | Copper | LEAD FINISH | Matte Tin |

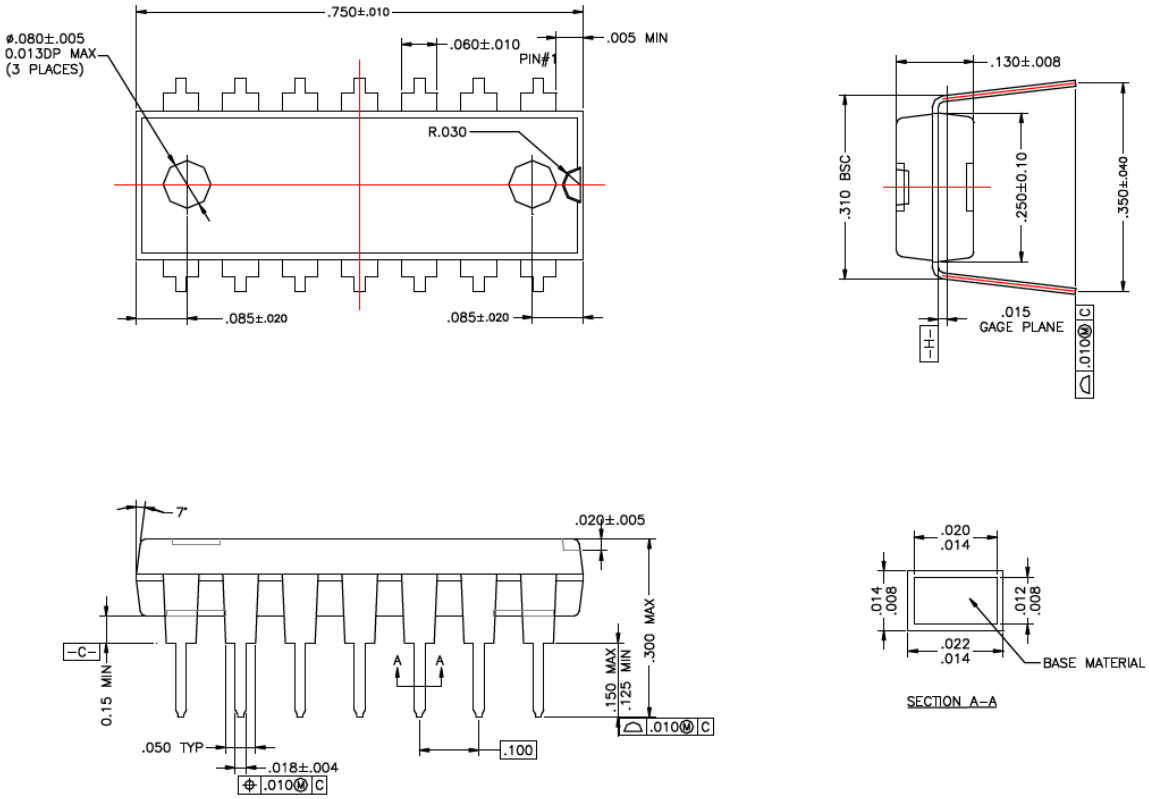


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

# APPENDIX A: REVISION HISTORY

## Revision A (October 2020)

- Converted Micrel document MIC38C42/43/44/45 to Microchip data sheet DS20006436A.
- Minor text changes throughout.

## Revision B (February 2022)

- Updated the Package Marking Information drawing with the most current marking information.
- Updated the 14-Lead SOIC Package Outline and Recommended Land Pattern drawing with the most current file.

**NOTES:**


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

| Device | [-X] | X | XX | [-XX] |
|---|---|---|---|---|
| Part No. | Product Feature | Temp. Range | Package | Media Type |

**Device:** MIC38C4x: BiCMOS Current-Mode PWM Controller (See Selection Guide Below for Part-Specific Detail)

MIC38C42: 96% Max. Duty Cycle, UVLO Threshold Startup 14.5V, Min. Operating 9V

MIC38C43: 96% Max. Duty Cycle, UVLO Threshold Startup 8.4V, Min. Operating 7.6V

MIC38C44: 50% Max. Duty Cycle, UVLO Threshold Startup 14.5V, Min. Operating 9V

MIC38C45: 50% Max. Duty Cycle, UVLO Threshold Startup 8.4V, Min. Operating 7.6V

**Product Feature:** <blank> = 8-Lead
1 = 14-Lead

**Junction Temperature Range:** Y = –40°C to +125°C, RoHS-Compliant

**Package:** M = SOIC Package
MM = MSOP Package
N = DIP Package

**Media Type:** TR = 2,500/Reel
<blank>= 95/Tube for 8-Lead M Package
<blank>= 100/Tube for MM Package
<blank>= 50/Tube for 8-Lead N Package
<blank>= 25/Tube for 14-Lead N Package
<blank>= 54/Tube for 14-Lead M Package

### Selection Guide

| Duty Cycle | UVLO Thresholds | |
|---|---|---|
| — | Start-Up 8.4V Min. Operating 7.6V | Start-Up 14.5V Min. Operating 9V |
| 0% to 96% | MIC38C43 | MIC38C42 |
| 0% to 50% | MIC38C45 | MIC38C44 |

**Examples:**

a) MIC38C42: BiCMOS Current-Mode PWM Controller, 96% Max. Duty Cycle, UVLO Threshold Startup 14.5V, Min. Operating 9V, –40°C to +125°C Junction Temperature Range

MIC38C42YM: 8-Lead SOIC, 95/Tube
MIC38C42-1YM 14-Lead SOIC, 54/Tube
MIC38C42YM-TR: 8-Lead SOIC, 2,500/Reel
MIC38C42-1YM-TR 14-Lead SOIC, 2,500/Reel
MIC38C42YMM: 8-Lead MSOP, 100/Tube
MIC38C42YMM-TR: 8-Lead MSOP, 2,500/Reel
MIC38C42-1YN 14-Lead DIP, 25/Tube
MIC38C42YN 8-Lead DIP, 50/Tube

b) MIC38C43: BiCMOS Current-Mode PWM Controller, 96% Max. Duty Cycle, UVLO Threshold Startup 8.4V, Min. Operating 7.6V, –40°C to +125°C Junction Temperature Range

MIC38C43YM: 8-Lead SOIC, 95/Tube
MIC38C43-1YM 14-Lead SOIC, 54/Tube
MIC38C43YM-TR: 8-Lead SOIC, 2,500/Reel
MIC38C43-1YM-TR 14-Lead SOIC, 2,500/Reel
MIC38C43YMM: 8-Lead MSOP, 100/Tube
MIC38C43YMM-TR: 8-Lead MSOP, 2,500/Reel
MIC38C43-1YN 14-Lead DIP, 25/Tube
MIC38C43YN 8-Lead DIP, 50/Tube

c) MIC38C44: BiCMOS Current-Mode PWM Controller, 50% Max. Duty Cycle, UVLO Threshold Startup 14.5V, Min. Operating 9V, –40°C to +125°C Junction Temperature Range

MIC38C44YM: 8-Lead SOIC, 95/Tube
MIC38C44-1YM 14-Lead SOIC, 54/Tube
MIC38C44YM-TR: 8-Lead SOIC, 2,500/Reel
MIC38C44-1YM-TR 14-Lead SOIC, 2,500/Reel
MIC38C44YMM: 8-Lead MSOP, 100/Tube
MIC38C44YMM-TR: 8-Lead MSOP, 2,500/Reel
MIC38C44-1YN 14-Lead DIP, 25/Tube
MIC38C44YN 8-Lead DIP, 50/Tube

d) MIC38C45: BiCMOS Current-Mode PWM Controller, 50% Max. Duty Cycle, UVLO Threshold Startup 8.4V, Min. Operating 7.6V, –40°C to +125°C Junction Temperature Range

MIC38C45YM: 8-Lead SOIC, 95/Tube
MIC38C45-1YM 14-Lead SOIC, 54/Tube
MIC38C45YM-TR: 8-Lead SOIC, 2,500/Reel
MIC38C45-1YM-TR 14-Lead SOIC, 2,500/Reel
MIC38C45YMM: 8-Lead MSOP, 100/Tube
MIC38C45YMM-TR: 8-Lead MSOP, 2,500/Reel
MIC38C45-1YN 14-Lead DIP, 25/Tube
MIC38C45YN 8-Lead DIP, 50/Tube

**Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

**NOTES:**


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

**Note the following details of the code protection feature on Microchip products:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at https://www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

*For information regarding Microchip’s Quality Management Systems, please visit www.microchip.com/quality.*

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, NVM Express, NVMe, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, Symmcom, and Trusted Time are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020 - 2022, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-5224-9769-1

# Worldwide Sales and Service

## AMERICAS

**Corporate Office**
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

**Atlanta**
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

**Austin, TX**
Tel: 512-257-3370

**Boston**
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

**Chicago**
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

**Dallas**
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

**Detroit**
Novi, MI
Tel: 248-848-4000

**Houston, TX**
Tel: 281-894-5983

**Indianapolis**
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

**Los Angeles**
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

**Raleigh, NC**
Tel: 919-844-7510

**New York, NY**
Tel: 631-435-6000

**San Jose, CA**
Tel: 408-735-9110
Tel: 408-436-4270

**Canada - Toronto**
Tel: 905-695-1980
Fax: 905-695-2078

## ASIA/PACIFIC

**Australia - Sydney**
Tel: 61-2-9868-6733

**China - Beijing**
Tel: 86-10-8569-7000

**China - Chengdu**
Tel: 86-28-8665-5511

**China - Chongqing**
Tel: 86-23-8980-9588

**China - Dongguan**
Tel: 86-769-8702-9880

**China - Guangzhou**
Tel: 86-20-8755-8029

**China - Hangzhou**
Tel: 86-571-8792-8115

**China - Hong Kong SAR**
Tel: 852-2943-5100

**China - Nanjing**
Tel: 86-25-8473-2460

**China - Qingdao**
Tel: 86-532-8502-7355

**China - Shanghai**
Tel: 86-21-3326-8000

**China - Shenyang**
Tel: 86-24-2334-2829

**China - Shenzhen**
Tel: 86-755-8864-2200

**China - Suzhou**
Tel: 86-186-6233-1526

**China - Wuhan**
Tel: 86-27-5980-5300

**China - Xian**
Tel: 86-29-8833-7252

**China - Xiamen**
Tel: 86-592-2388138

**China - Zhuhai**
Tel: 86-756-3210040

## ASIA/PACIFIC

**India - Bangalore**
Tel: 91-80-3090-4444

**India - New Delhi**
Tel: 91-11-4160-8631

**India - Pune**
Tel: 91-20-4121-0141

**Japan - Osaka**
Tel: 81-6-6152-7160

**Japan - Tokyo**
Tel: 81-3-6880- 3770

**Korea - Daegu**
Tel: 82-53-744-4301

**Korea - Seoul**
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**
Tel: 60-3-7651-7906

**Malaysia - Penang**
Tel: 60-4-227-8870

**Philippines - Manila**
Tel: 63-2-634-9065

**Singapore**
Tel: 65-6334-8870

**Taiwan - Hsin Chu**
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**
Tel: 886-7-213-7830

**Taiwan - Taipei**
Tel: 886-2-2508-8600

**Thailand - Bangkok**
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**
Tel: 84-28-5448-2100

## EUROPE

**Austria - Wels**
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

**Denmark - Copenhagen**
Tel: 45-4485-5910
Fax: 45-4485-2829

**Finland - Espoo**
Tel: 358-9-4520-820

**France - Paris**
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

**Germany - Garching**
Tel: 49-8931-9700

**Germany - Haan**
Tel: 49-2129-3766400

**Germany - Heilbronn**
Tel: 49-7131-72400

**Germany - Karlsruhe**
Tel: 49-721-625370

**Germany - Munich**
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

**Germany - Rosenheim**
Tel: 49-8031-354-560

**Israel - Ra'anana**
Tel: 972-9-744-7705

**Italy - Milan**
Tel: 39-0331-742611
Fax: 39-0331-466781

**Italy - Padova**
Tel: 39-049-7625286

**Netherlands - Drunen**
Tel: 31-416-690399
Fax: 31-416-690340

**Norway - Trondheim**
Tel: 47-7288-4388

**Poland - Warsaw**
Tel: 48-22-3325737

**Romania - Bucharest**
Tel: 40-21-407-87-50

**Spain - Madrid**
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

**Sweden - Gothenberg**
Tel: 46-31-704-60-40

**Sweden - Stockholm**
Tel: 46-8-5090-4654

**UK - Wokingham**
Tel: 44-118-921-5800
Fax: 44-118-921-5820


© 2020 - 2022 Microchip Technology Inc. and its subsidiaries

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

# Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

### Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

**www.entegreci.com**

### Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

**Kategorilere göz atın**

### Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

**Üreticileri görün**

### Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

**Teklif isteyin**

**www.entegreci.com** | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.