Voltage Regulator - CMOS, Low Noise, Low-Dropout 150 mA

NCP500, NCV500



TSOP-5
SN SUFFIX
CASE 483



DFN 2x2.2 MM
SQL SUFFIX
CASE 506BA

The NCP500 series of fixed output low dropout linear regulators are designed for portable battery powered applications which require low noise operation, fast enable response time, and low dropout. The device achieves its low noise performance without the need of an external noise bypass capacitor. Each device contains a voltage reference unit, an error amplifier, a PMOS power transistor, and resistors for setting output voltage, and current limit and temperature limit protection circuits.

The NCP500 has been designed to be used with low cost ceramic capacitors and requires a minimum output capacitor of 1.0 μF.

Features

- Ultra-Low Dropout Voltage of 170 mV at 150 mA
- Fast Enable Turn-On Time of 20 μsec
- Wide Operating Voltage Range of 1.8 V to 6.0 V
- Excellent Line and Load Regulation
- High Accuracy Output Voltage of 2.5%
- Enable Can Be Driven Directly by 1.0 V Logic
- Typical RMS Noise Voltage 50 μV with No Bypass Capacitor (BW = 10 Hz to 100 kHz)
- Very Small DFN 2x2.2 Package
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These are Pb-Free Devices

Typical Applications

- Noise Sensitive Circuits – VCO's, RF Stages, etc.
- SMPS Post-Regulation
- Hand-Held Instrumentation
- Camcorders and Cameras

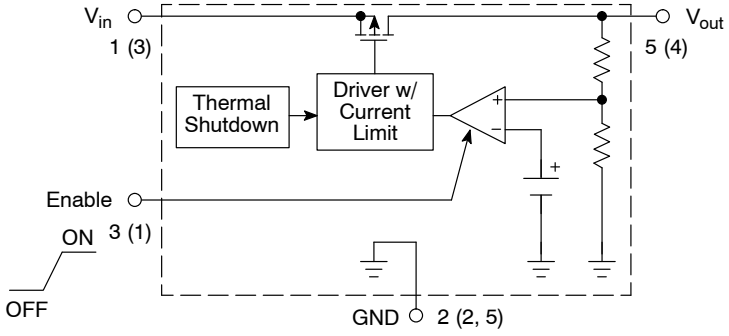

NOTE: Pin numbers in parenthesis indicate DFN package.

Figure 1. Simplified Block Diagram

PIN CONNECTIONS AND MARKING DIAGRAMS

TSOP–5



(Top View)

xxx = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
▪ = Pb-Free Package
(Note: Microdot may be in either location)

DFN 2x2.2 mm



(Top View)

xx = Specific Device Code
M = Date Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 16 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 16.

© Semiconductor Components Industries, LLC, 2015

PIN FUNCTION DESCRIPTION

TSOP-5 Pin No.	DFN 2x2 Pin No.	Pin Name	Description
1	3	V_{in}	Positive power supply input voltage.
2	2, 5	GND	Power supply ground.
3	1	Enable	This input is used to place the device into low-power standby. When this input is pulled to a logic low, the device is disabled. If this function is not used, Enable should be connected to V_{in}.
4	6	N/C	No internal connection.
5	4	V_{out}	Regulated output voltage.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Input Voltage	V_{in}	0 to 6.0	V
Enable Voltage	$V_{on/off}$	−0.3 to V_{in} +0.3	V
Output Voltage	V_{out}	−0.3 to V_{in} +0.3	V
Output Short Circuit Duration	–	Infinite	–
Thermal Resistance, Junction-to-Ambient TSOP-5 DFN (Note 3)	$R_{\theta JA}$	 250 225	°C/W
Operating Junction Temperature	T_J	+125	°C
Storage Temperature	T_{stg}	−65 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. This device series contains ESD protection and exceeds the following tests:
   Human Body Model 2000 V per MIL-STD-883, Method 3015
   Machine Model Method 200 V Latch up capability (85 °C) ±100 mA.
2. Device is internally limited to 160 °C by thermal shutdown.
3. For more information, refer to application note, AND8080/D.

ELECTRICAL CHARACTERISTICS (V_{in} = 2.35 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−1.8 V					
Output Voltage (T_A = −40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	1.755	1.8	1.845	V
Line Regulation (V_{in} = 2.3 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 140 270	 10 200 350	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 175 175	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (V_{in} = 2.35 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−1.85 V					
Output Voltage (T_A = −40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	1.804	1.85	1.896	V
Line Regulation (V_{in} = 2.3 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 – –	 10 – –	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 175 175	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

ELECTRICAL CHARACTERISTICS (V_{in} = 3.0 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−2.5 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	 2.438	 2.5	 2.563	V
Line Regulation (V_{in} = 3.0 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 100 190	 10 170 270	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 180 180	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (V_{in} = 3.1 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−2.6 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	2.535	2.6	2.665	V
Line Regulation (V_{in} = 3.0 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 – –	 10 – –	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 180 180	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

ELECTRICAL CHARACTERISTICS (V_{in} = 3.2 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−2.7 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	2.633	2.7	2.768	V
Line Regulation (V_{in} = 3.2 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 90 180	 10 160 260	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 185 185	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (V_{in} = 3.3 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−2.8 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	 2.730	 2.8	 2.870	V
Line Regulation (V_{in} = 3.3 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 90 170	 10 150 250	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 185 185	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

ELECTRICAL CHARACTERISTICS (V_{in} = 3.5 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−3.0 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	2.925	3.0	3.075	V
Line Regulation (V_{in} = 3.5 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 85 165	 10 130 240	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 190 190	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (V_{in} = 3.8 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−3.3 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	3.218	3.3	3.383	V
Line Regulation (V_{in} = 3.8 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 80 150	 10 110 230	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 195 195	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

ELECTRICAL CHARACTERISTICS (V_{in} = 5.5 V, C_{in} = 1.0 μF, C_{out} = 1.0 μF, for typical value T_A = 25 °C, for min and max values T_A = −40 °C to 85 °C, T_{jmax} = 125 °C, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
−5.0 V					
Output Voltage (T_A =−40 °C to 85 °C, I_{out} = 1.0 mA to 150 mA)	V_{out}	4.875	5.0	5.125	V
Line Regulation (V_{in} = 5.5 V to 6.0 V, I_{out} = 1.0 mA)	Reg_{line}	–	1.0	10	mV
Load Regulation (I_{out} = 1.0 mA to 150 mA)	Reg_{load}	–	15	45	mV
Dropout Voltage (Measured at V_{out} −2.0%, T_A = −40 °C to 85 °C) (Iout = 1.0 mA) (Iout = 75 mA) (Iout = 150 mA)	V_{in}–V_{out}	 – – –	 2.0 60 120	 10 100 180	mV
Output Short Circuit Current	$I_{out(max)}$	200	540	700	mA
Ripple Rejection (V_{in} = $V_{out\ (nom.)}$ + 1.0 V + 0.5 V_{pp}, f = 1.0 kHz, I_o = 60 mA)	RR	–	62	–	dB
Quiescent Current (Enable Input = 0 V) (Enable Input = 0.9 V, I_{out} = 1.0 mA) (Enable Input = 0.9 V, I_{out} = 150 mA)	I_Q	 – – –	 0.01 210 210	 1.0 300 300	μA
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(EN)}$	 0.9 –	 – –	 – 0.15	V
Enable Input Bias Current	$I_{IB(EN)}$	–	3.0	100	nA
Output Turn On Time (Enable Input = 0 V to V_{in})	–	–	20	100	μs

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Maximum package power dissipation limits must be observed.

$$PD = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

5. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

Share Feedback
Your Opinion Matters

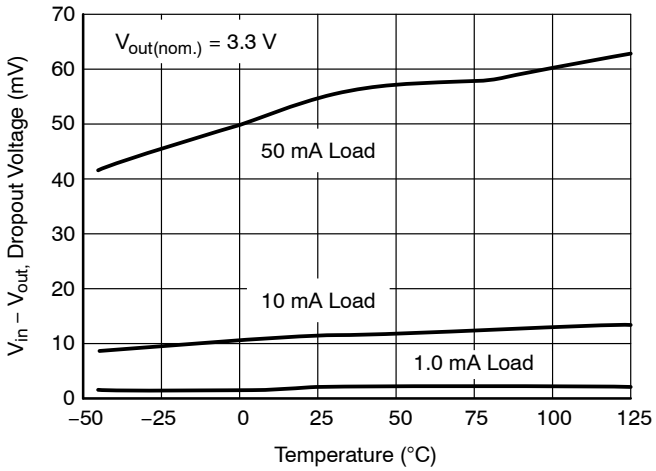

Figure 2. Dropout Voltage vs. Temperature

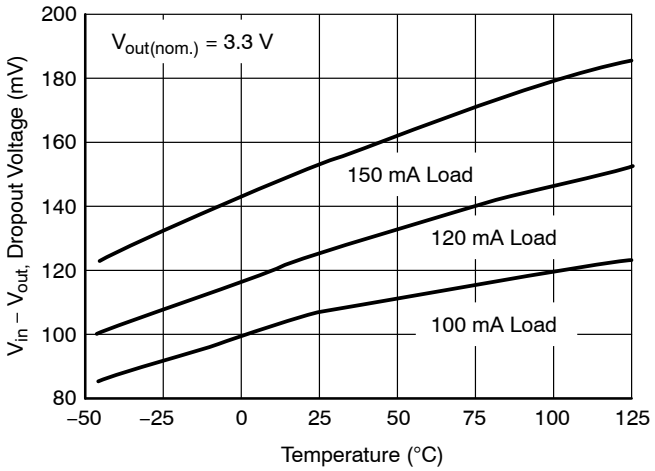

Figure 3. Dropout Voltage vs. Temperature

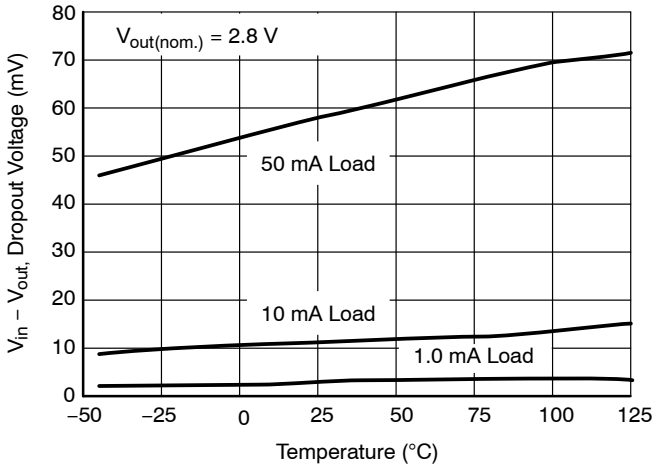

Figure 4. Dropout Voltage vs. Temperature

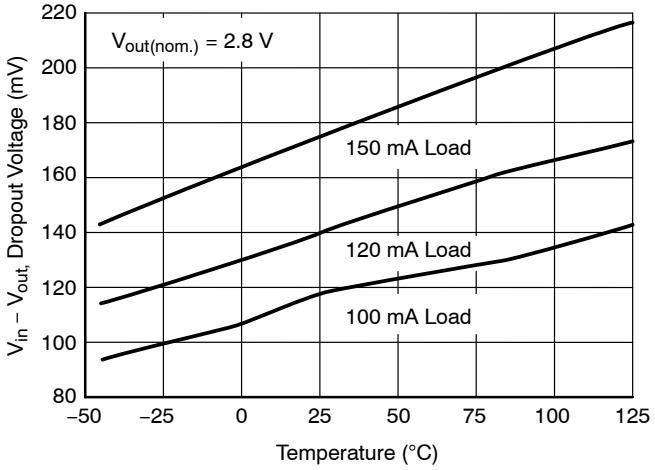

Figure 5. Dropout Voltage vs. Temperature

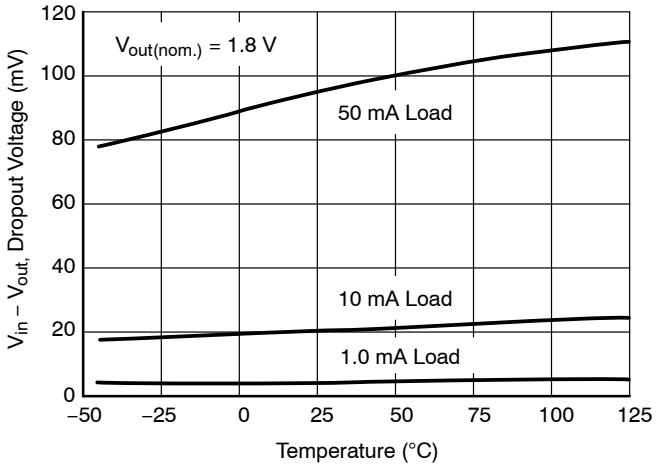

Figure 6. Dropout Voltage vs. Temperature

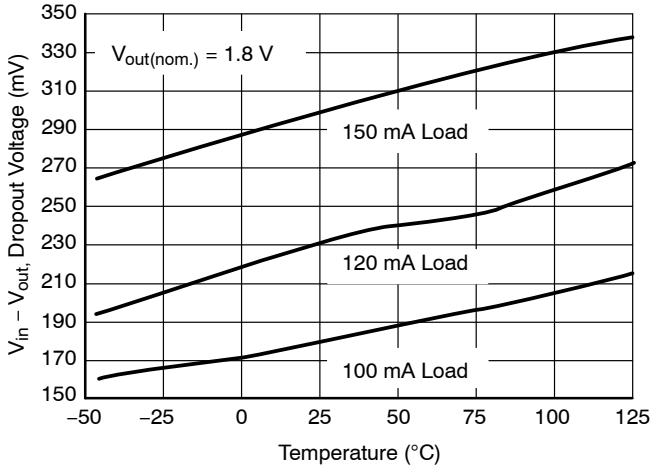

Figure 7. Dropout Voltage vs. Temperature

Share Feedback
Your Opinion Matters

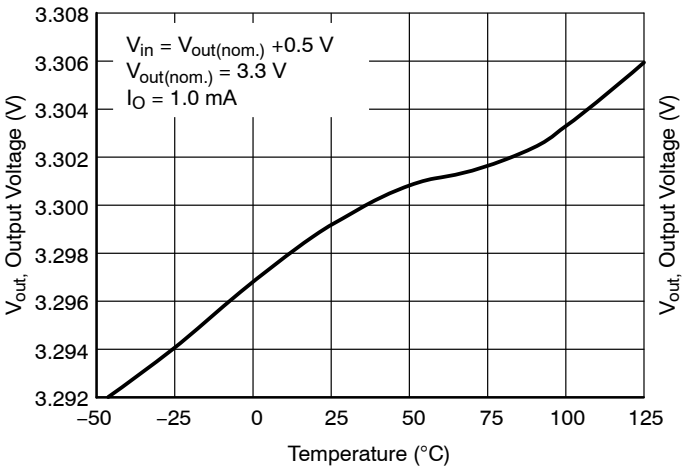

Figure 8. Output Voltage vs. Temperature

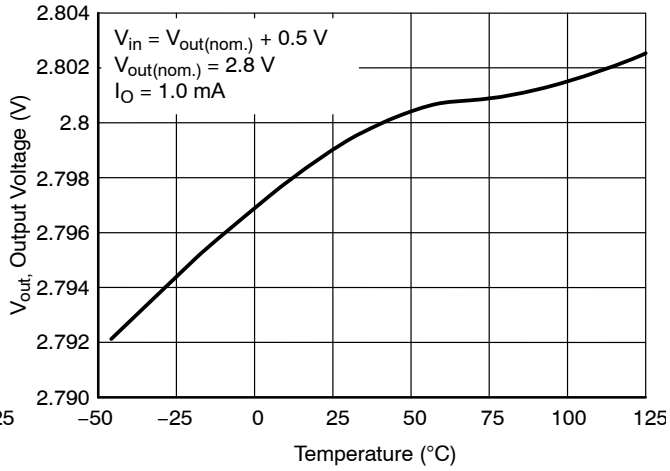

Figure 9. Output Voltage vs. Temperature

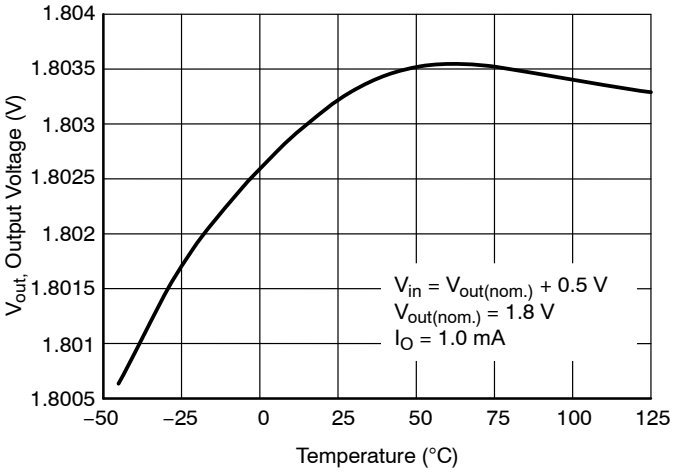

Figure 10. Output Voltage vs. Temperature

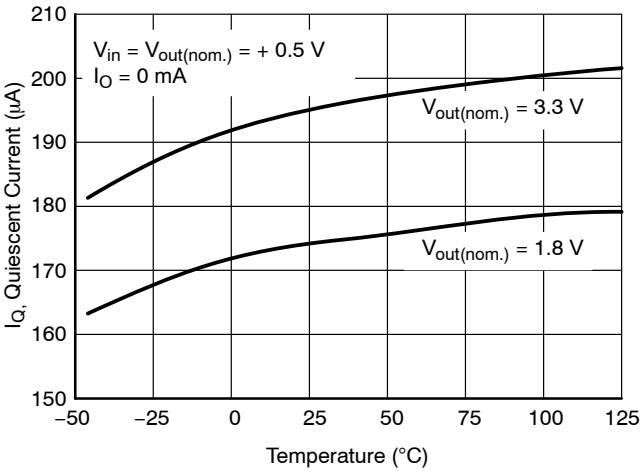

Figure 11. Quiescent Current vs. Temperature

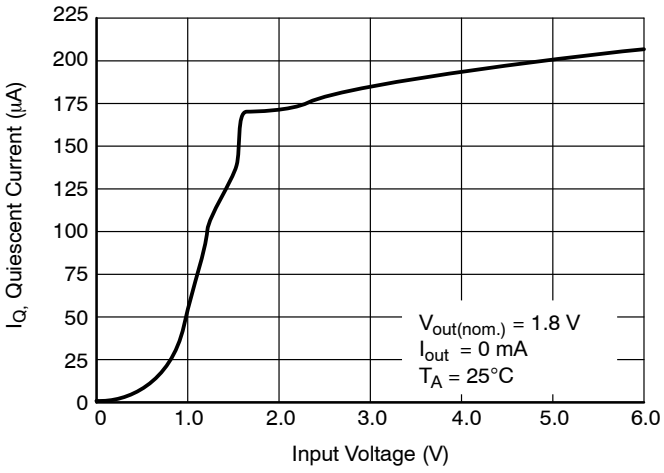

Figure 12. Quiescent Current vs. Input Voltage

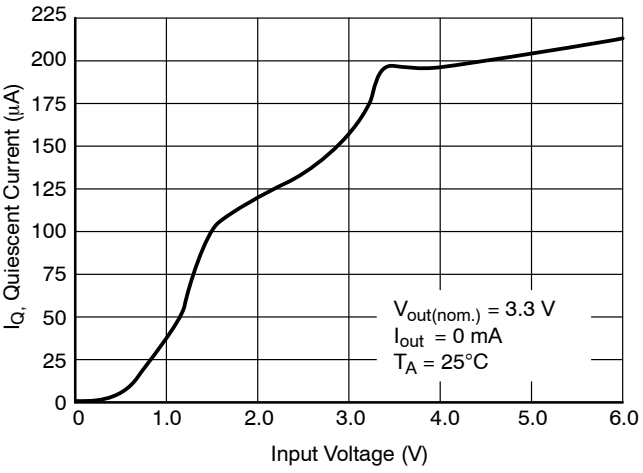

Figure 13. Quiescent Current vs. Input Voltage

Share Feedback
Your Opinion Matters

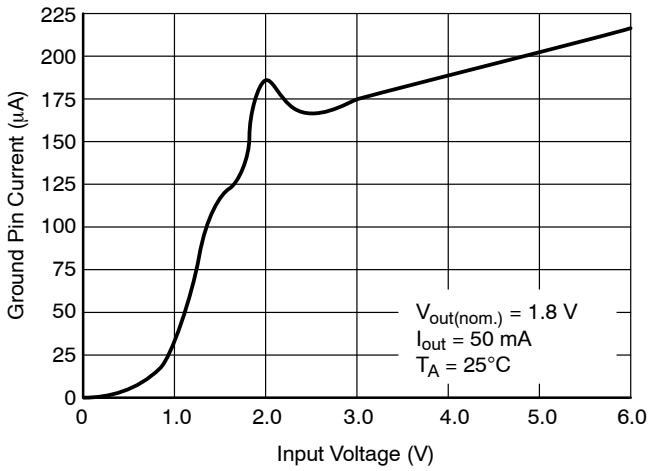

Figure 14. Ground Pin Current vs. Input Voltage

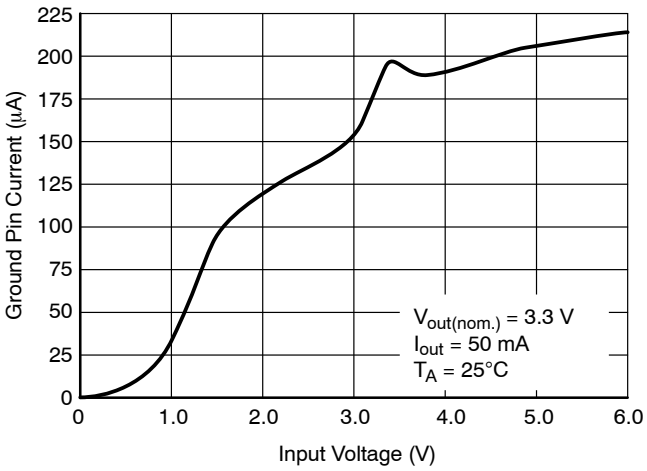

Figure 15. Ground Pin Current vs. Input Voltage

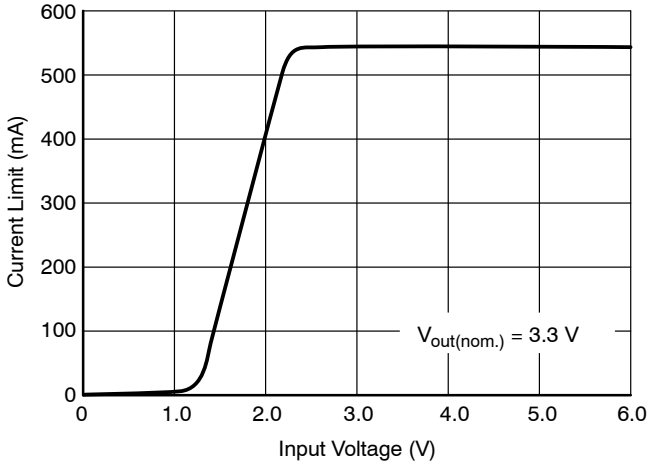

Figure 16. Current Limit vs. Input Voltage

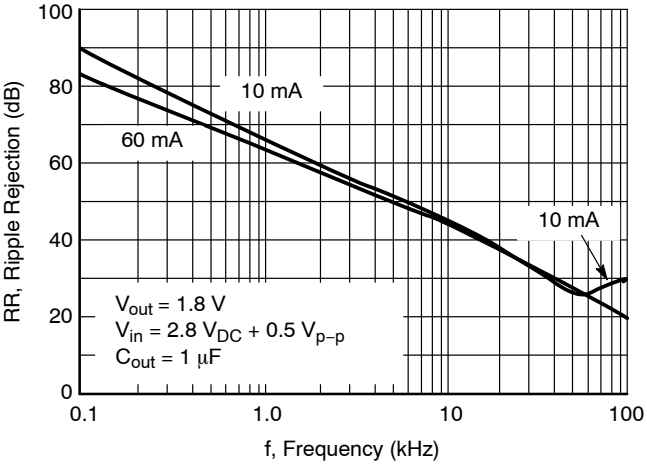

Figure 17. Ripple Rejection vs. Frequency

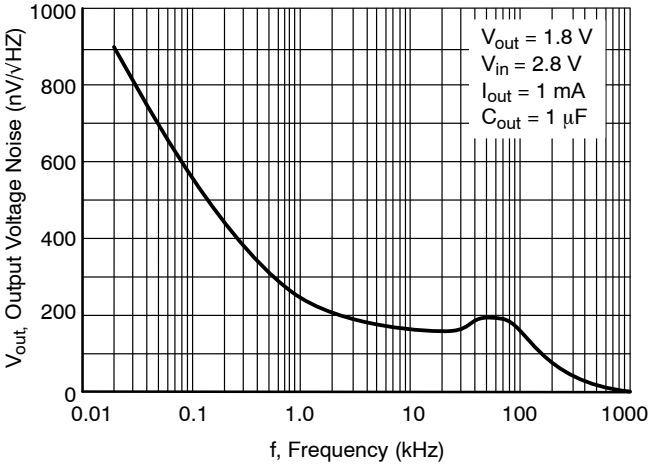

Figure 18. Output Noise Density

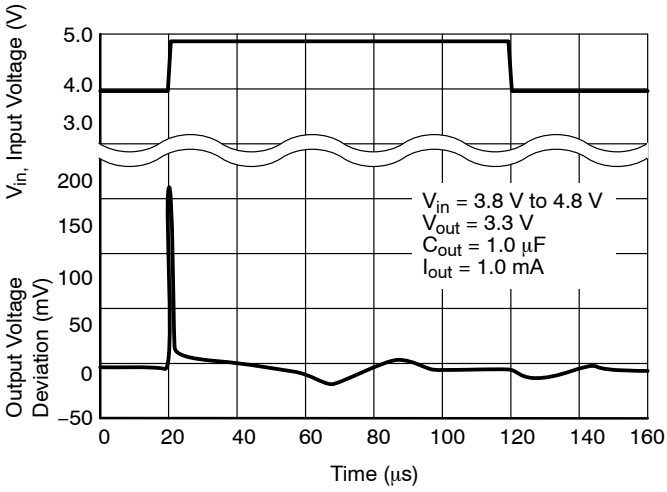

Figure 19. Line Transient Response

Share Feedback
Your Opinion Matters

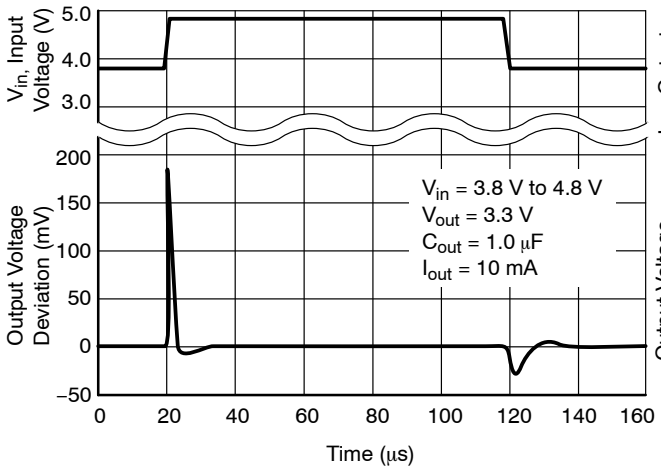

Figure 20. Line Transient Response

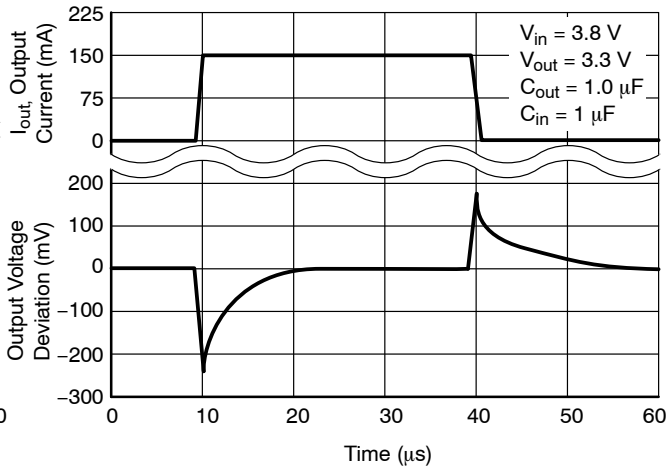

Figure 21. Load Transient Response

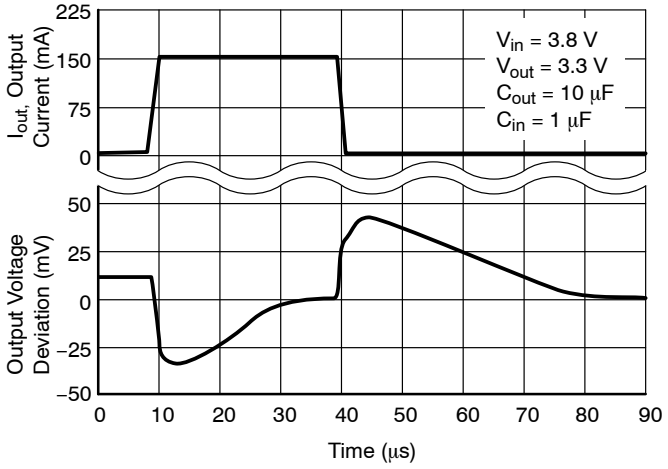

Figure 22. Load Transient Response

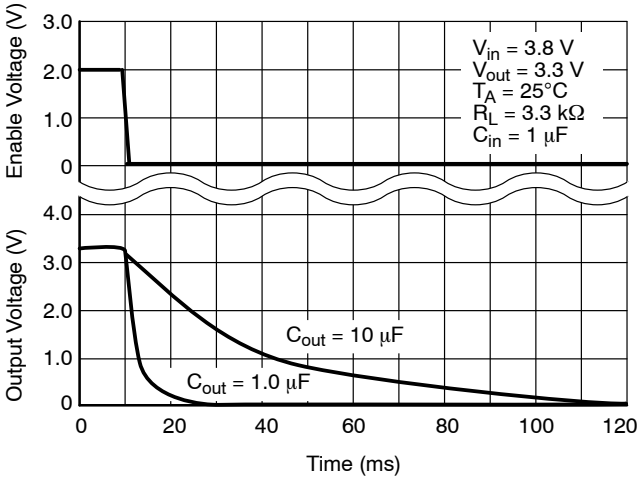

Figure 23. Turn−off Response

Share Feedback
Your Opinion Matters

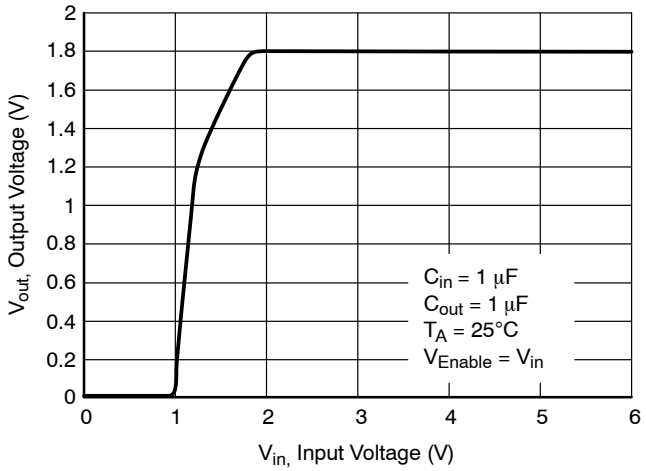

Figure 24. Output Voltage vs. Input Voltage

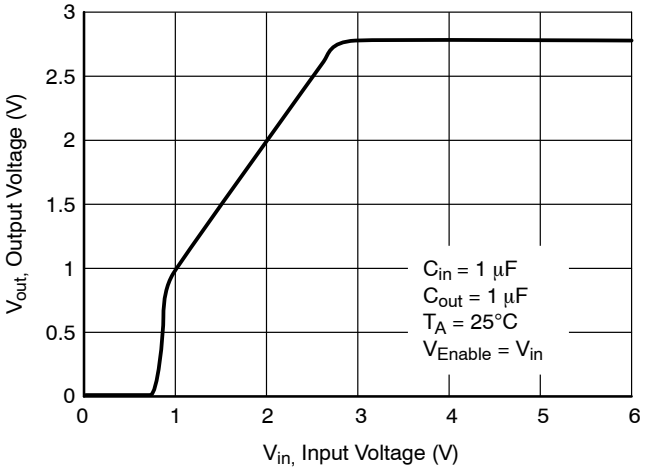

Figure 25. Output Voltage vs. Input Voltage

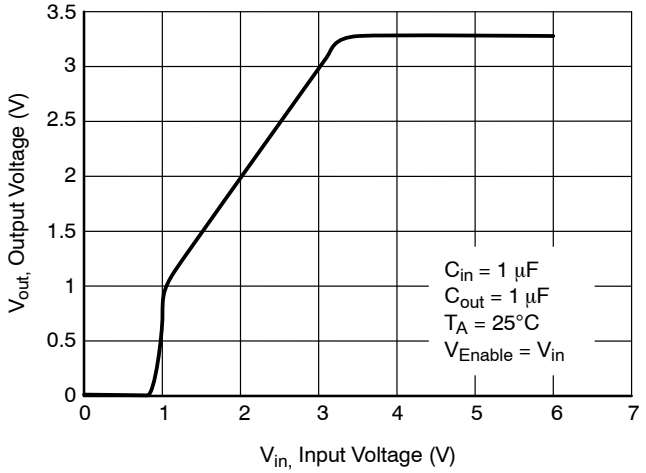

Figure 26. Output Voltage vs. Input Voltage

Share Feedback
Your Opinion Matters

DEFINITIONS

Load Regulation

The change in output voltage for a change in output load current at a constant temperature.

Dropout Voltage

The input/output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

Output Noise Voltage

This is the integrated value of the output noise over a specified frequency range. Input voltage and output load current are kept constant during the measurement. Results are expressed in μVRMS or $nV\sqrt{Hz}$.

Quiescent Current

The current which flows through the ground pin when the regulator operates without a load on its output: internal IC operation, bias, etc. When the LDO becomes loaded, this term is called the Ground current. It is actually the difference between the input current (measured through the LDO input pin) and the output current.

Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse technique such that the average chip temperature is not significantly affected.

Line Transient Response

Typical over and undershoot response when input voltage is excited with a given slope.

Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically 160 °C, the regulator turns off. This feature is provided to prevent failures from accidental overheating.

Maximum Package Power Dissipation

The power dissipation level at which the junction temperature reaches its maximum operating value, i.e. 125 °C.

APPLICATIONS INFORMATION

The NCP500 series regulators are protected with internal thermal shutdown and internal current limit. A typical application circuit is shown in Figure 27.

Input Decoupling (C1)

A 1.0 μF capacitor either ceramic or tantalum is recommended and should be connected close to the NCP500 package. Higher values and lower ESR will improve the overall line transient response.

Output Decoupling (C2)

The NCP500 is a stable component and does not require a minimum Equivalent Series Resistance (ESR) or a minimum output current. The minimum decoupling value is 1.0 μF and can be augmented to fulfill stringent load transient requirements. The regulator accepts ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response. Figure 29 shows the stability region for a range of operating conditions and ESR values.

Noise Decoupling

The NCP500 is a low noise regulator without the need of an external bypass capacitor. It typically reaches a noise level of 50 μVRMS overall noise between 10 Hz and 100 kHz. The classical bypass capacitor impacts the start up phase of standard LDOs. However, thanks to its low noise architecture, the NCP500 operates without a bypass element and thus offers a typical 20 μs start up phase.

Enable Operation

The enable pin will turn on or off the regulator. These limits of threshold are covered in the electrical specification section of this data sheet. The turn-on/turn-off transient voltage being supplied to the enable pin should exceed a slew rate of 10 mV/μs to ensure correct operation. If the enable is not to be used then the pin should be connected to V_{in}.

Thermal

As power across the NCP500 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature effect the rate of junction temperature rise for the part. This is stating that when the NCP500 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power dissipation applications.

Share Feedback
Your Opinion Matters

The maximum dissipation the package can handle is given by:

$$PD = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

If T_J is not recommended to exceed 125 °C, then the NCP500 can dissipate up to 400 mW @ 25 °C.

The power dissipated by the NCP500 can be calculated from the following equation:

$$P_{tot} = [V_{in} * I_{gnd}\ (I_{out})] + [V_{in} - V_{out}] * I_{out}$$

or

$$V_{inMAX} = \frac{P_{tot} + V_{out} * I_{out}}{I_{gnd} + I_{out}}$$

If a 150 mA output current is needed the ground current is extracted from the data sheet curves: 200 μA @ 150 mA. For a NCP500SN18T1 (1.8 V), the maximum input voltage will then be 4.4 V, good for a 1 Cell Li-ion battery.

Hints

Please be sure the V_{in} and GND lines are sufficiently wide. When the impedance of these lines is high, there is a chance to pick up noise or cause the regulator to malfunction.

Set external components, especially the output capacitor, as close as possible to the circuit, and make leads as short as possible.

Package Placement

DFN packages can be placed using standard pick and place equipment with an accuracy of ±0.05 mm. Component pick and place systems are composed of a vision system that recognizes and positions the component and a mechanical system which physically performs the pick and place operation. Two commonly used types of vision systems are: (1) a vision system that locates a package silhouette and (2) a vision system that locates individual bumps on the interconnect pattern. The latter type renders more accurate place but tends to be more expensive and time consuming. Both methods are acceptable since the parts align due to a self-centering feature of the DFN solder joint during solder re-flow.

Solder Paste

Type 3 or Type 4 solder paste is acceptable.

Re-flow and Cleaning

The DFN may be assembled using standard IR/IR convection SMT re-flow processes without any special considerations. As with other packages, the thermal profile for specific board locations must be determined. Nitrogen purge is recommended during solder for no-clean fluxes. The DFN is qualified for up to three re-flow cycles at 235 °C peak (J-STD-020). The actual temperature of the DFN is a function of:

- Component density
- Component location on the board
- Size of surrounding components

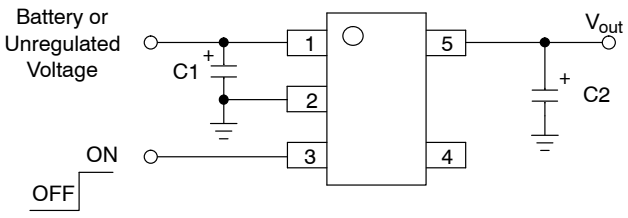

Figure 27. Typical Application Circuit

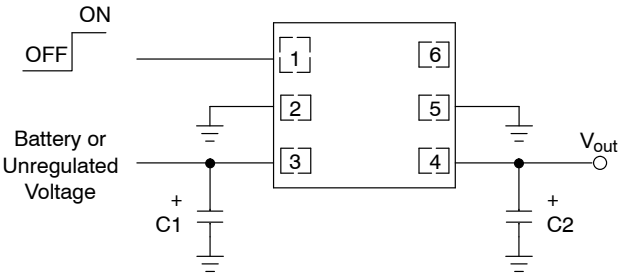

Figure 28. Typical Application Circuit

Share Feedback
Your Opinion Matters

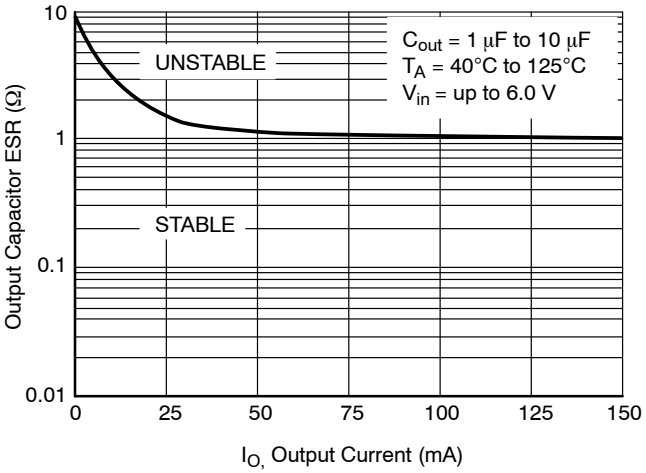

Figure 29. Stability

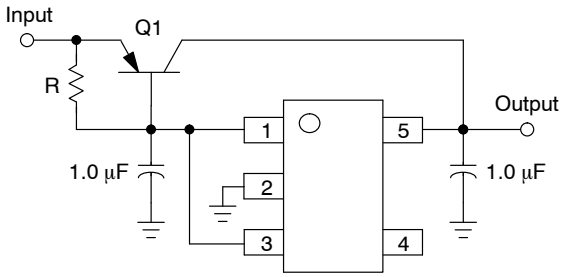

Figure 30. Current Boost Regulator

The NCP500 series can be current boosted with a PNP transistor. Resistor R in conjunction with V_{BE} of the PNP determines when the pass transistor begins conducting; this circuit is not short circuit proof. Input/Output differential voltage minimum is increased by V_{BE} of the pass resistor.

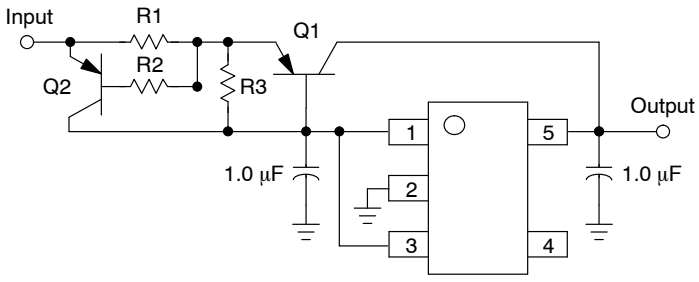

Figure 31. Current Boost Regulator with Short Circuit Limit

Short circuit current limit is essentially set by the V_{BE} of Q2 and R1. I_{SC} = ((V_{BEQ2} − ib * R2) / R1) + $I_{O(max)\ Regulator}$

Share Feedback
Your Opinion Matters

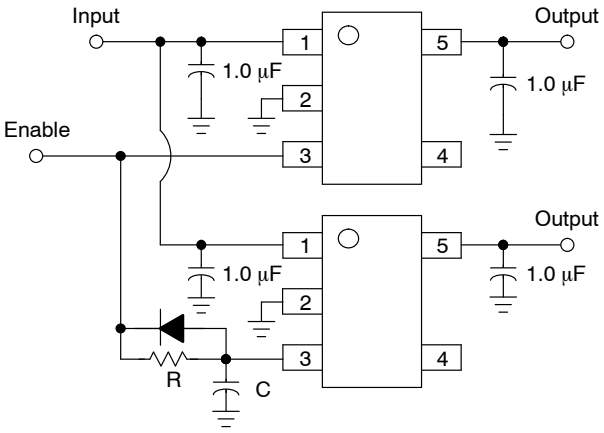

Figure 32. Delayed Turn-on

If a delayed turn-on is needed during power up of several voltages then the above schematic can be used. Resistor R, and capacitor C, will delay the turn-on of the bottom regulator. A few values were chosen and the resulting delay can be seen in Figure 33.

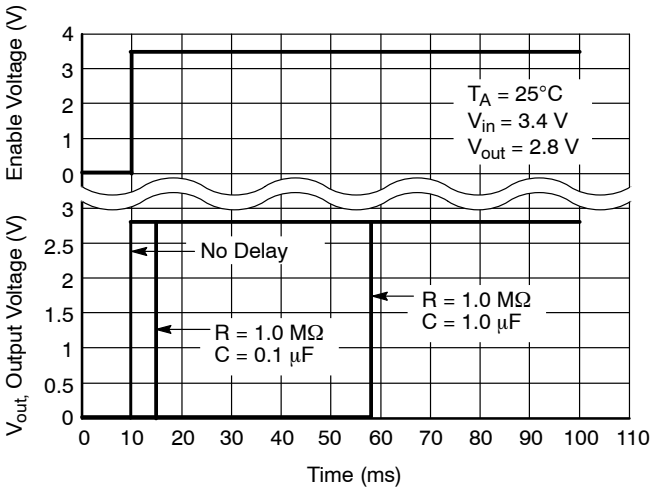

Figure 33. Delayed Turn-on

The graph shows the delay between the enable signal and output turn-on for various resistor and capacitor values.

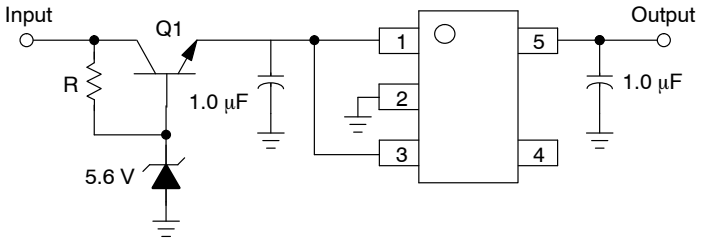

Figure 34. Input Voltages Greater than 6.0 V

A regulated output can be achieved with input voltages that exceed the 6.0 V maximum rating of the NCP500 series with the addition of a simple pre-regulator circuit. Care must be taken to prevent Q1 from overheating when the regulated output (V_{out}) is shorted to G_{nd}.

Share Feedback
Your Opinion Matters

ORDERING INFORMATION

Device	Nominal Output Voltage	Marking	Package	Shipping†
NCP500SN18T1G	1.8	LCS	TSOP-5 (Pb-Free)	3000 Units/ 7″ Tape & Reel
NCP500SN25T1G	2.5	LCT		
NCP500SN30T1G	3.0	LCW		
NCP500SN33T1G	3.3	LCX		
NCV500SN18T1G*	1.8	LCS		
NCV500SN28T1G*	2.8	LCV		
NCV500SN33T1G*	3.3	LCX		

DISCONTINUED (Note 6)

NCP500SN185T1G	1.85	LFL	TSOP-5 (Pb-Free)	3000 Units/ 7″ Tape & Reel
NCP500SN26T1G	2.6	LFM		
NCP500SN27T1G	2.7	LCU		
NCP500SN28T1G	2.8	LCV		
NCP500SN30T2G	3.0	LCW		
NCP500SN50T1G	5.0	LCY		
NCV500SN185T1G*	1.85	LFL		
NCP500SQL18T1G	1.8	LD	DFN6 2x2.2 (Pb-Free)	3000 Units/ 7″ Tape & Reel
NCP500SQL25T1G	2.5	LE		
NCP500SQL27T1G	2.7	LF		
NCP500SQL28T1G	2.8	LG		
NCP500SQL30T1G	3.0	LH		
NCP500SQL33T1G	3.3	LJ		
NCP500SQL50T1G	5.0	LK		

For availability of other output voltages, please contact your local **onsemi** Sales Representative.

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

* NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

6. **DISCONTINUED:** These devices are not available. Please contact your **onsemi** representative for information. The most current information on these devices may be available on www.onsemi.com.

Share Feedback
Your Opinion Matters

REVISION HISTORY

Revision	Description of Changes	Date
23	Rebranded the Data Sheet to **onsemi** format. NCP500SN185T1G, NCP500SN26T1G, NCP500SN27T1G, NCP500SN28T1G, NCP500SN30T2G, NCP500SN50T1G, NCV500SN185T1G, NCP500SQL18T1G, NCP500SQL25T1G, NCP500SQL27T1G, NCP500SQL28T1G, NCP500SQL30T1G, NCP500SQL33T1G, NCP500SQL50T1G OPNs Marked as Discontinued.	2/25/2026

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.

Share Feedback
Your Opinion Matters



TSOP−5 3.00x1.50x0.95, 0.95P
CASE 483
ISSUE P

DATE 01 APR 2024

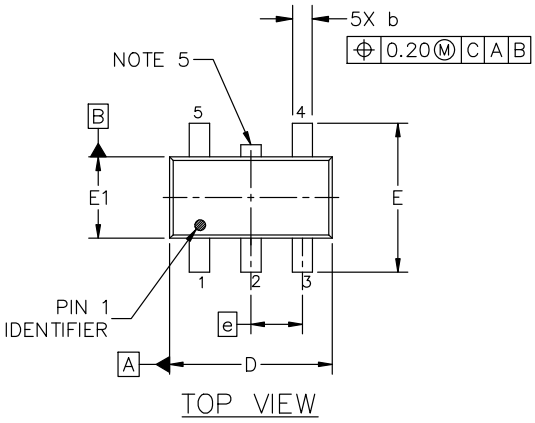

TOP VIEW

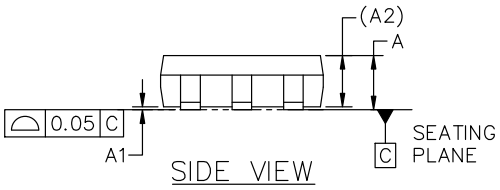

SIDE VIEW



DETAIL "A"
SCALE 2:1

NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5−2018.
2. ALL DIMENSION ARE IN MILLIMETERS (ANGLES IN DEGREES).
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OF GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION D.
5. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.



END VIEW

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.900	1.000	1.100
A1	0.010	0.055	0.100
A2		0.950 REF.	
b	0.250	0.375	0.500
c	0.100	0.180	0.260
D	2.850	3.000	3.150
E	2.500	2.750	3.000
E1	1.350	1.500	1.650
e		0.950 BSC	
L	0.200	0.400	0.600
θ	0°	5°	10°

GENERIC
MARKING DIAGRAM*



Analog

XXX = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
▪ = Pb−Free Package

(Note: Microdot may be in either location)



Discrete/Logic

XXX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

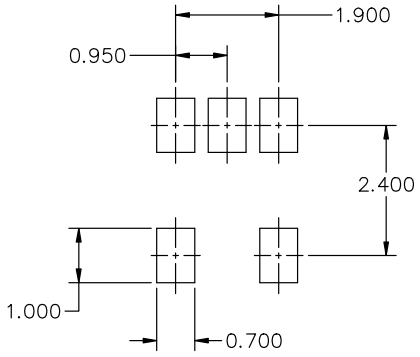

RECOMMENDED MOUNTING FOOTPRINT*

* FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOCUMENT NUMBER:	**98ARB18753C**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**TSOP−5 3.00x1.50x0.95, 0.95P**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2018



SCALE 4:1

DFN6, 2x2.2, 0.65P
CASE 506BA
ISSUE A

DATE 07 JUL 2008

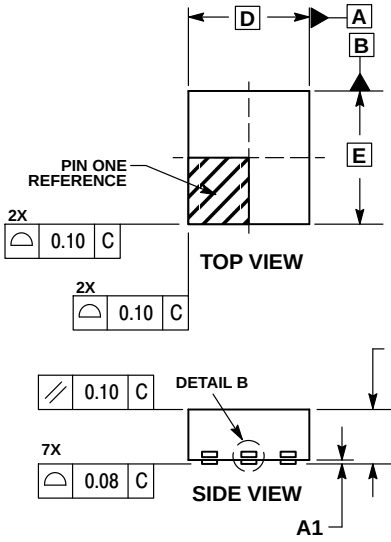



DETAIL A
ALTERNATE TERMINAL CONSTRUCTIONS

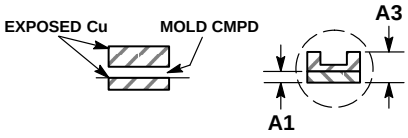

DETAIL B
ALTERNATE CONSTRUCTIONS

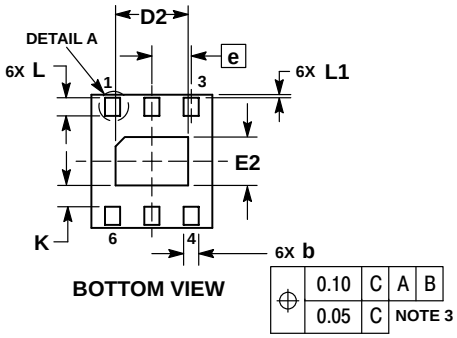

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 mm FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

	MILLIMETERS	
DIM	MIN	MAX
A	0.80	1.00
A1	0.00	0.05
b	0.20	0.30
D	2.00 BSC	
D2	1.10	1.30
E	2.20 BSC	
E2	0.70	0.90
e	0.65 BSC	
K	0.20	---
L	0.25	0.35
L1	0.00	0.10

GENERIC MARKING DIAGRAM*



XX = Specific Device Code
M = Date Code
▪ = Pb−Free Device

*This information is generic. Please refer to device data sheet for actual part marking.
Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present.

SOLDERING FOOTPRINT*

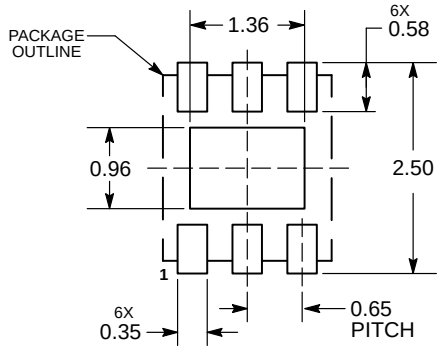

DIMENSIONS: MILLIMETERS

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON23023D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**6 PIN DFN, 2.0X2.2, 0.65P**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.