SI-3000KS Series Surface-Mount, Low Current Consumption, Low Dropout Voltage

■Features

- Compact surface-mount package (SOP8)
- Output current: 1.0 A
- Compatible with low ESR capacitor
- Low circuit current at output OFF Iq ≤ 350 μA (I_O = 0 A, V_C = 2 V)
- Low current consumption Iq (OFF) ≤ 1 μA (V_C = 0 V)
- Low dropout voltage V_{DIF} ≤ 0.6 V (I_O = 1 A)
- 3 types of output voltages (2.5 V, 3.3 V, and variable type) available
- Output ON/OFF control terminal voltage compatible with LS-TTL
- Built-in drooping-type-overcurrent and thermal protection circuits

■Applications

- Local power supplies
- Battery-driven electronic equipment

■Absolute Maximum Ratings

(T_a=25°C)

Parameter	Symbol	Ratings	Unit
DC Input Voltage	V_{IN}*1	17	V
Output Control Terminal Voltage	V_C	V_{IN}	V
DC Output Current	I_O*1	1.0	A
Power Dissipation	P_D*1, *2	0.76	W
Junction Temperature	T_j	–40 to +125	°C
Storage Temperature	T_{stg}	–40 to +125	°C
Thermal Resistance (Junction to Ambient Air)	$\theta_{j\text{-}a}$	130	°C/W
Thermal resistance (Junction to Lead (pin 7))	$\theta_{j\text{-}L}$	22	°C/W

*1: V_{IN} (max) and I_O (max) are restricted by the relation PD = (V_{IN} - V_O) × I_O. Please calculate these values referring to the Copper laminate area vs. Power dissipation data as shown hereinafter.

*2: When mounted on a glass epoxy board of 1600 mm^2 (copper laminate area 2%).

■Electrical Characteristics

(T_a=25°C, V_C=2 V, unless otherwise specified)

Parameter		Symbol	Ratings									Unit
			SI-3012KS (variable type)			SI-3025KS			SI-3033KS			
			min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	
Input Voltage		V_{IN}	2.4			*1			*1			V
Output Voltage (Reference voltage V_{ADJ} for SI-3012KS)		V_O (V_{ADJ})	1.24	1.28	1.32	2.45	2.50	2.55	3.234	3.300	3.366	V
		Conditions	V_{IN}=3.3V, I_O=10mA			V_{IN}=3.3V, I_O=10mA			V_{IN}=5V, I_O=10mA			
Dropout Voltage		V_{DIF}			0.3			0.4			0.4	V
		Conditions	I_O=0.5A (V_O=2.5V)			I_O=0.5A			I_O=0.5A			
					0.6			0.6			0.6	
		Conditions	I_O=1A (V_O=2.5V)			I_O=1A			I_O=1A			
Line Regulation		ΔV_{OLINE}			10			10			15	mV
		Conditions	V_{IN}=3.3 to 8V, I_O=10mA (V_O=2.5V)			V_{IN}=3.3 to 8V, I_O=10mA			V_{IN}=5 to 10V, I_O=10mA			
Load Regulation		ΔV_{OLOAD}			40			40			50	mV
		Conditions	V_{IN}=3.3V, I_O=0 to 1A (V_O=2.5V)			V_{IN}=3.3V, I_O=0 to 1A			V_{IN}=5V, I_O=0 to 1A			
Quiescent Circuit Current		I_q			350			350			350	μA
		Conditions	V_{IN}=3.3V, I_O=0A, V_C=2V, R2=24kΩ			V_{IN}=3.3V, I_O=0A, V_C=2V			V_{IN}=5V, I_O=0A, V_C=2V			
Circuit Current at Output OFF		I_q (OFF)			1			1			1	μA
		Conditions	V_{IN}=3.3V, V_C=0V			V_{IN}=3.3V, V_C=0V			V_{IN}=5V, V_C=0V			
Temperature Coefficient of Output Voltage		$\Delta V_O/\Delta T_a$		±0.3			±0.3			±0.3		mV/°C
		Conditions	T_j=0 to 100°C (V_O=2.5V)			T_j=0 to 100°C			T_j=0 to 100°C			
Ripple Rejection		R_{REJ}		55			55			55		dB
		Conditions	V_{IN}=3.3V, f=100 to 120Hz (V_O=2.5V)			V_{IN}=3.3V, f=100 to 120Hz			V_{IN}=5V, f=100 to 120Hz			
Overcurrent Protection Starting Current*2		I_{S1}	1.2			1.2			1.2			A
		Conditions	V_{IN}=3.3V (V_O=2.5V)			V_{IN}=3.3V			V_{IN}=5V			
V_C Terminal	Control Voltage (Output ON)*3	V_C, IH	2.0			2.0			2.0			V
	Control Voltage (Output OFF)	V_C, IL			0.8			0.8			0.8	
	Control Current (Output ON)	I_C, IH			40			40			40	μA
		Conditions	V_C=2V									
	Control Current (Output OFF)	I_C, IL	–5	0		–5	0		–5	0		μA
		Conditions	V_C=0V									

*1: Refer to the Dropout Voltage parameter.


*2: The I_{S1} is specified at the 5% drop point of output voltage V_O on the condition that V_{IN} = V_O + 1 V, and I_O = 10 mA.

*3: Output is OFF when the output control terminal V_C is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

Not Recommended for New Designs

■External Dimensions (SOP8)

(Unit : mm)

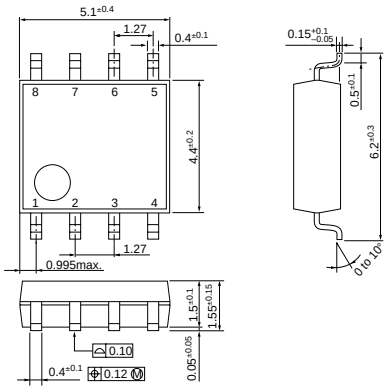


Pin Assignment
① V_C
② V_{IN}
③ V_O
④ Sence (ADJ for SI-3012KS)
⑤ GND
⑥ GND
⑦ GND
⑧ GND


Plastic Mold Package Type
Flammability: UL 94V-0
Product Mass: Approx. 0.1 g

■Block Diagram

●SI-3012KS

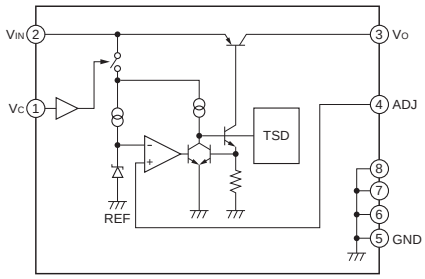


●SI-3025KS, SI-3033KS

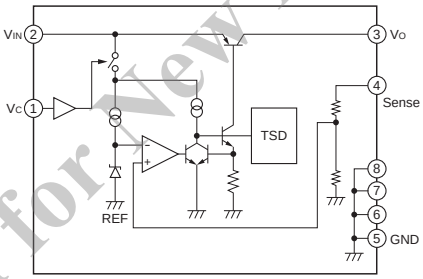


■Typical Connection Diagram

●SI-3012KS

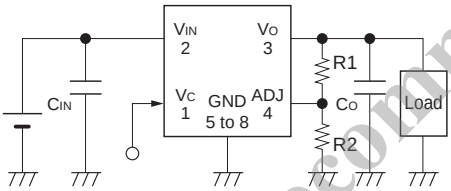

●SI-3025KS, SI-3033KS

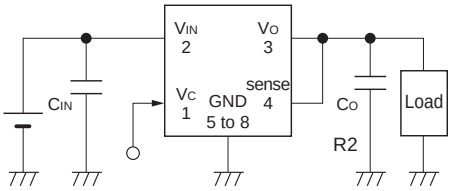


R_1, R_2: Output voltage setting resistors
The output voltage can be set by connecting R_1 and R_2 as shown above.
The recommended value of R_2 is 24 kΩ .

$R1=(V_O–V_{ADJ})÷(V_{ADJ}/R2)$


C_{IN}: Input capacitor (22 μF or larger)
C_O: Output capacitor (22 μF or larger)
For SI-3000KS series, Co has to be a low ESR capacitor.
When using the electrolytic capacitor, the SI-3000KS series may oscillate at a low temperature.

■Reference Data

Copper Laminate Area vs. Thermal Resistance

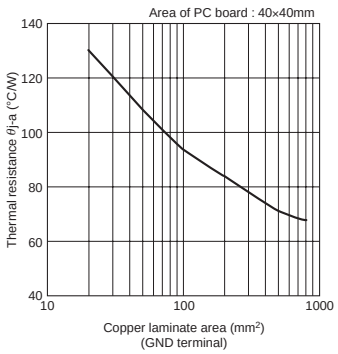

Copper Laminate Area vs. Power Dissipation

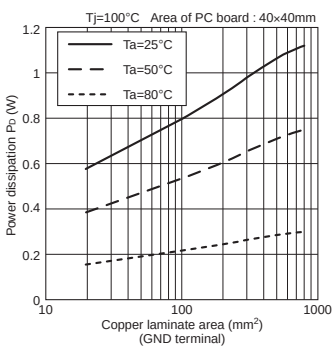

• Obtaining the junction temperature
Measure the temperature T_L at the lead part of the GND pin (pin 7) with a thermocouple, etc. Then, substitute this value in the following formula to obtain the junction temperature.

$T_j=P_D \times \theta_{j-L} + T_L$ ($\theta_{j-L} = 22°C/W$)

Not Recommended for New Designs

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.