Features

- Dual input and dual output (ch1: 5V/0.4A, ch2: 5V/0.2A)
- Power on reset function
- Watchdog timer
- Built-in drooping type overcurrent and thermal protection circuits (ch1)

Absolute Maximum Ratings

(Ta=25°C)

Parameter		Symbol	Ratings	Unit	Remarks
DC input voltage		$V_{IN}1$	–13 to 35	V	Reverse connection 1 min max.
		$V_{IN}2$			
Vo1, Vo2 output control terminal voltage		EN	–0.3 to 35	V	
Vo2 output control terminal voltage		VC	–0.3 to 35	V	
Output current	CH1	Io1	0.4	A	
	CH2	Io2	0.2		
TC terminal input voltage		TC	–0.3 to 7	V	
CK terminal input voltage		CK			
W/D/C terminal input voltage		W/D/C			
Reset terminal output voltage		RESET			
Power dissipation		P_D1	18.6	W	With an infinite heatsink mounted.
		P_D2	2.97		*1
Junction temperature		Tj	–40 to 150	°C	
Operating temperature		Top	–40 to 105	°C	
Storage temperature		Tstg	–40 to 150	°C	
Thermal resistance (junction to case)		θj-c	6.7	°C/W	With an infinite heatsink mounted.
Thermal resistance (junction to ambient air)		θj-a	42	°C/W	*1


Notes: *1: With glass epoxy + copper foil board (size 5.0•7.4cm; t: glass epoxy=1.6mm / copper foil=18μm)

Electrical Characteristics


Parameter		Symbol	Ratings min	Ratings typ	Ratings max	Unit	Conditions
Input voltage		$V_{IN}1, 2$	$V_{O1}+V_{DIF}1$		35	V	*2, 3
Output voltage	CH1	Vo1	4.85	5.00	5.15	V	$V_{IN}1$=6 to 18V, Io=0 to 0.3A
	CH2	Vo2	4.85	5.00	5.15		$V_{IN}2$=6 to 18V, Io=0 to 0.3A
Dropout voltage	CH1	$V_{DIF}1$			0.5	V	
	CH2	$V_{DIF}2$			0.5		
Ripple rejection	CH1	$R_{REJ}1$		54		db	f=100 to 120Hz
	CH2	$R_{REJ}2$		54			
Quiescent circuit current		Iq		10	50	μA	$V_{IN}1$=16V, V_{EN}=0V
				50	250		$V_{IN}1$=35V, V_{EN}=0V
				5	10	mA	
GND current		I_{GND}		70	100	mA	Io1=Io2=0.2A
Overcurrent protection starting current	CH1	Is11	0.402		1.8	A	Vo1=4.5V
	CH2	Is21	0.201		0.8		Vo2=4.5V
Residual current at a short	CH1	Is21	0.402		1.8	A	Vo1=0V
	CH2	Is22	0.201		0.8		Vo2=0V
EN output control voltage		V_{EN}th	0.9		3.5	V	
EN output control current	ON	I_{EN}H			50	μA	EN=5V
	OFF	I_{EN}L	–1.0		1.0		EN=0V
Reset terminal LOW voltage		V_{RS}L			0.5	V	Isink=250μA (Pull-up resistance 20kΩ typ)
Reset terminal HI voltage		V_{RS}H	Vo1-0.8V			V	Isource=15μA *4
Reset detect voltage	CH	Vo1thH			Vo1•0.97	V	Vrs＞4.5V
		Vo1thL	4.05			V	Vrs＜0.8V
Power on reset delay time		t_{dly}	1.18•Rtc•Ctc	1.26•Rtc•Ctc	1.35•Rtc•Ctc	S	Min. set time: 6mS
W/D time		t_{wd}	0.93•Rtc•Ctc	1.03•Rtc•Ctc	1.13•Rtc•Ctc	S	Min. set time: 4mS
W/D pulse time		t_{wdp}	0.07•Rtc•Ctc	0.13•Rtc•Ctc	0.19•Rtc•Ctc	S	Min. set time: 400μS
CK terminal control voltage		Vckth	1.0		3.0	V	Min. clock pulse time: 5μs (Duty 50%)
CK terminal control current	ON	IckH			200	μA	V_{CK}=5V
	OFF	IckL	–1.0		1.0		V_{CK}=0V
Vc output control voltage		Vcth	1.0		3.5	V	
Vc output control current		IcH			300	μA	Vc=5V
		IcL	–1.0		1.0		Vc=0V
W/D/C terminal control voltage		Vw/d/cth	1.0		3.0	V	
W/D/C terminal control current	ON	Iw/d/cH			200	μA	$V_{W/D/C}$=5V
	OFF	Iw/d/cL	–1.0		1.0		$V_{W/D/C}$=0V

Notes:
*2: Refer to Dropout Voltage.
*3: Since $P_D(max) = (V_{IN}–V_O1) • I_O1 + (V_{IN}2–V_O2) • I_O2 + (V_{IN} • Iq) = 22W$, $V_{IN}(max)$, $I_O1(max)$ and $I_O2(max)$ may be limited depending on operating conditions.
*4: The RESET terminal is pulled up in the IC; may be directly connected to logic circuits.
*6: The thermal protection function is built in V_{O1} (CH1 side) only. The design thermal protection starting temperature is 151 °C (min.) and 165°C (typ). These values represent the design warranty.

External Dimensions (unit: mm)

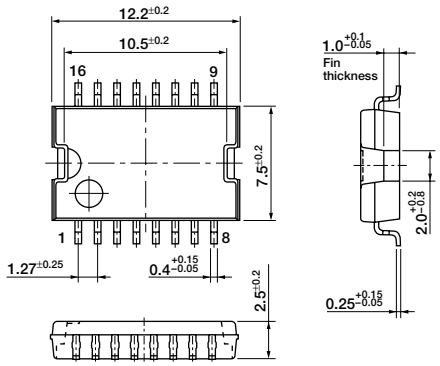


Standard Connection Diagram

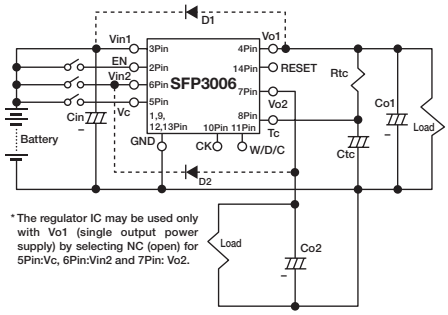


*The regulator IC may be used only with Vo1 (single output power supply) by selecting NC (open) for 5Pin:Vc, 6Pin:Vin2 and 7Pin: Vo2.

Cin: Capacitor (39μF) for oscillation prevention
C_O1: Output capacitor (39μF)
C_O2: Output capacitor (39μF)
Tantalum capacitors are recommended particularly for low temperatures (tantalum capacitors of about 0.47μ F in parallel).
D1, D2: Protection diodes.
Required for protection against reverse biasing between input and output (Recommended diode: SANKEN EU2Z).

Circuit Block Diagram

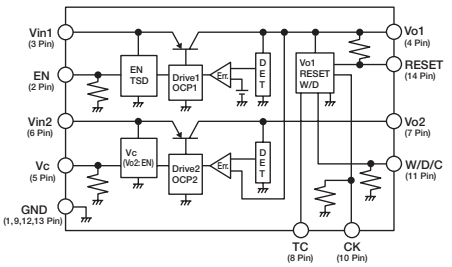


Timing Chart

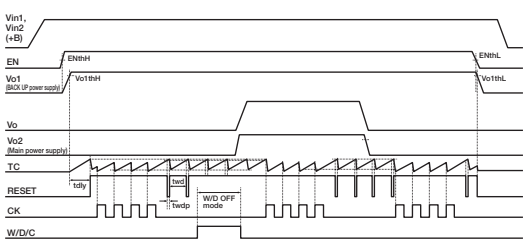


Electrical Characteristics


■ Rise Characteristics of Output Voltage (V_{O1})

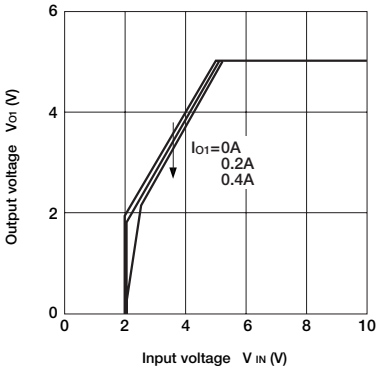


■ Rise Characteristics of Output Voltage (V_{O2})

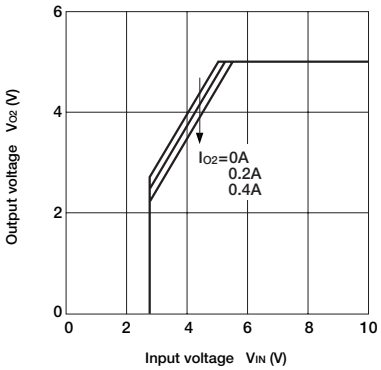


■ Line Regulation (V_{O1})

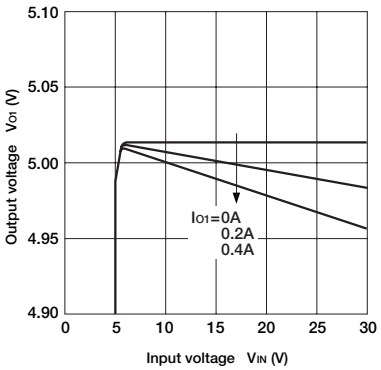


■ Line Regulation (V_{O2})

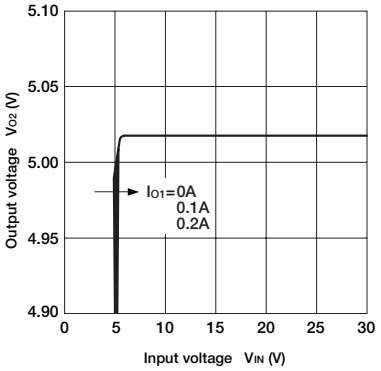


■ Load Regulation (V_{O1})

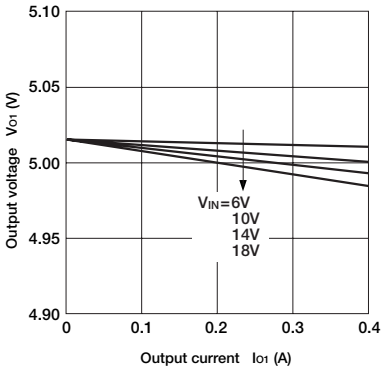


■ Load Regulation (V_{O2})

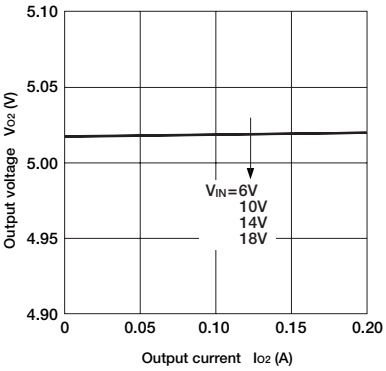


■ Dropout Voltage (V_{O1})

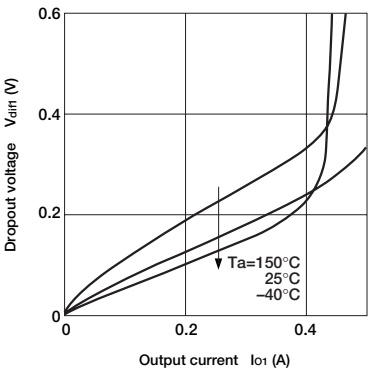


■ Dropout Voltage (V_{O2})

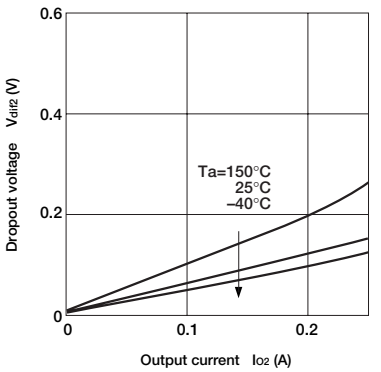


■ Overcurrent Protection Characteristics (V_{O1})

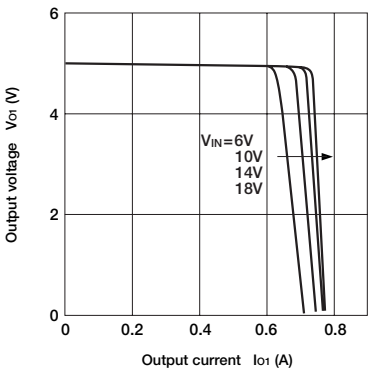


■ Overcurrent Protection Characteristics (V_{O2})

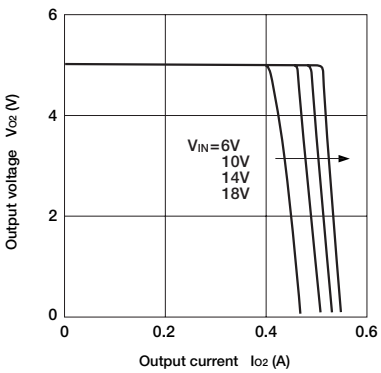

■ Thermal Protection Characteristics

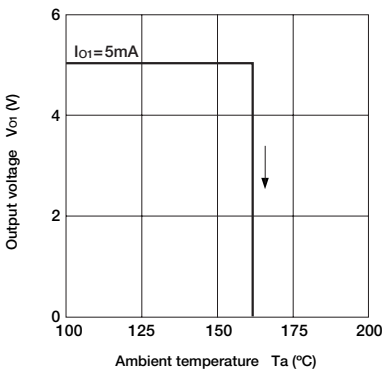

■ Ta—P_D Characteristics

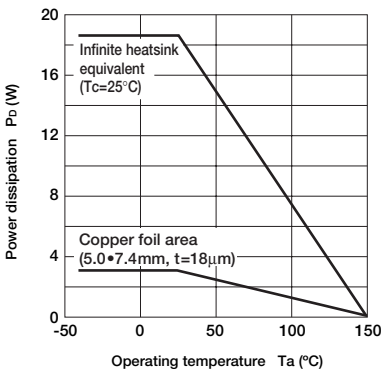

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.