
7N70-TC

Power MOSFET

7A, 700V N-CHANNEL POWER MOSFET

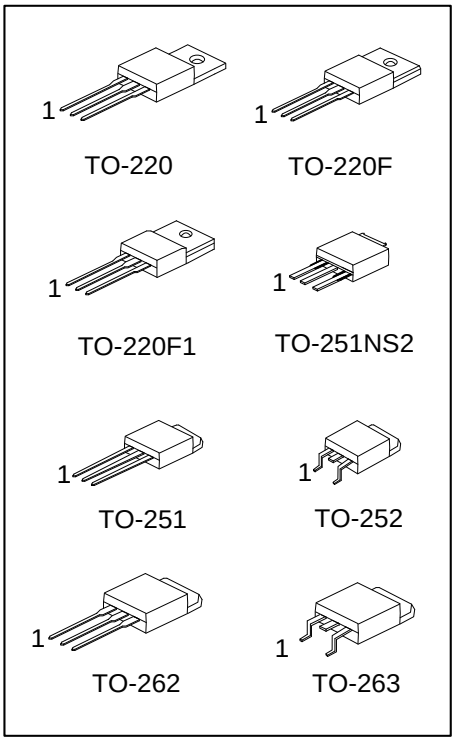


■ DESCRIPTION

The UTC **7N70-TC** is a high voltage power MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient AC to DC converters and bridge circuits.

■ FEATURES

* $R_{DS(ON)} \leq 1.7\ \Omega$ @ V_{GS}=10V, I_D=3.5A
* High Switching Speed


■ SYMBOL



■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
7N70L-TA3-T	7N70G-TA3-T	TO-220	G	D	S	Tube
7N70L-TF3-T	7N70G-TF3-T	TO-220F	G	D	S	Tube
7N70L-TF1-T	7N70G-TF1-T	TO-220F1	G	D	S	Tube
7N70L-TM3-T	7N70G-TM3-T	TO-251	G	D	S	Tube
7N70L-TMN2-T	7N70G-TMN2-T	TO-251NS2	G	D	S	Tube
7N70L-TN3-R	7N70G-TN3-R	TO-252	G	D	S	Tape Reel
7N70L-T2Q-T	7N70G-T2Q-T	TO-262	G	D	S	Tube
7N70L-TQ2-T	7N70G-TQ2-T	TO-263	G	D	S	Tube
7N70L-TQ2-R	7N70G-TQ2-R	TO-263	G	D	S	Tape Reel


Note: Pin Assignment: G: Gate D: Drain S: Source

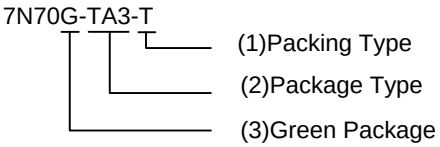

(1) T: Tube, R: Tape Reel
(2) TA3: TO-220, TF1: TO-220F1, TF3: TO-220F
TM3: TO-251, TN3: TO-252, T2Q: TO-262
TQ2: TO-263
(3) G: Halogen Free and Lead Free, L: Lead Free

Copyright © 2019 Unisonic Technologies Co., Ltd

■ MARKING

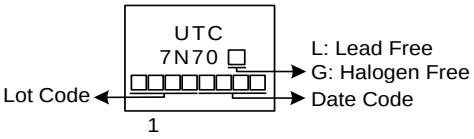

■ ABSOLUTE MAXIMUM RATINGS (T_C = 25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	700	V
Gate-Source Voltage		V_{GSS}	± 30	V
Drain Current	Continuous	I_D	7	A
	Pulsed (Note 2)	I_{DM}	14	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	80	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	3.2	V/ns
Power Dissipation	TO-220/TO-262 TO-263	P_D	142	W
	TO-220F/TO-220F1		40	W
	TO-251/TO-251NS2 TO-252		57	W
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. L = 10mH, I_{AS} = 4.0A, V_{DD} = 50V, R_G = 25 Ω Starting T_J = 25°C
4. I_{SD} ≤ 7.0A, di/dt ≤200A/μs, V_{DD} ≤BV_{DSS}, Starting T_J = 25°C

■ THERMAL DATA


PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F TO-220F1/TO-262 TO-263	θ_{JA}	62.5	°C/W
	TO-251/TO-251NS2 TO-252		110	
Junction to Case	TO-220/TO-262 TO-263	θ_{JC}	0.88	°C/W
	TO-220F/TO-220F1		3.125	
	TO-251/TO-251NS2 TO-252		2.08	

■ ELECTRICAL CHARACTERISTICS (T_J = 25°C, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	V_{GS}=0V, I_D= 250μA	700			V
Drain-Source Leakage Current		I_{DSS}	V_{DS}=700V, V_{GS}=0V			10	μA
Gate-Source Leakage Current	Forward	I_{GSS}	V_{GS}=30V, V_{DS}=0V			100	nA
	Reverse		V_{GS}=-30V, V_{DS}=0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	V_{DS}=V_{GS}, I_D=250μA	2.0		4.0	V
Static Drain-Source On-State Resistance		$R_{DS(ON)}$	V_{GS}=10V, I_D=3.5A			1.7	Ω
DYNAMIC CHARACTERISTICS							
Input Capacitance		C_{ISS}	V_{GS}=0V, V_{DS}=25V, f=1.0 MHz		1035		pF
Output Capacitance		C_{OSS}			85		pF
Reverse Transfer Capacitance		C_{RSS}			2.4		pF
SWITCHING CHARACTERISTICS							
Total Gate Charge (Note 1)		Q_G	V_{DS}=100V, V_{GS}=10V, I_D=7.0A I_G=1mA (Note 1, 2)		20		nC
Gateource Charge		Q_{GS}			8		nC
Gate-Drain Charge		Q_{GD}			4		nC
Turn-on Delay Time (Note 1)		$t_{D(ON)}$	V_{DS}=100V, V_{GS}=10V, I_D=7.0A, R_G=25Ω (Note 1, 2)		18		ns
Rise Time		t_R			20		ns
Turn-off Delay Time		$t_{D(OFF)}$			56		ns
Fall-Time		t_F			23		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I_S				7	A
Maximum Body-Diode Pulsed Current		I_{SM}				28	A
Drain-Source Diode Forward Voltage (Note 1)		V_{SD}	V_{GS}=0V, I_S=7.0A			1.4	V
Reverse Recovery Time (Note 1)		t_{rr}	V_{GS}=0V, I_S=7.0A, dI_F/dt=100A/μs (Note1)		330		ns
Reverse Recovery Charge		Q_{rr}			3.8		μC

Notes: 1. Pulse Test : Pulse width ≤ 300μs, Duty cycle ≤ 2%.
2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

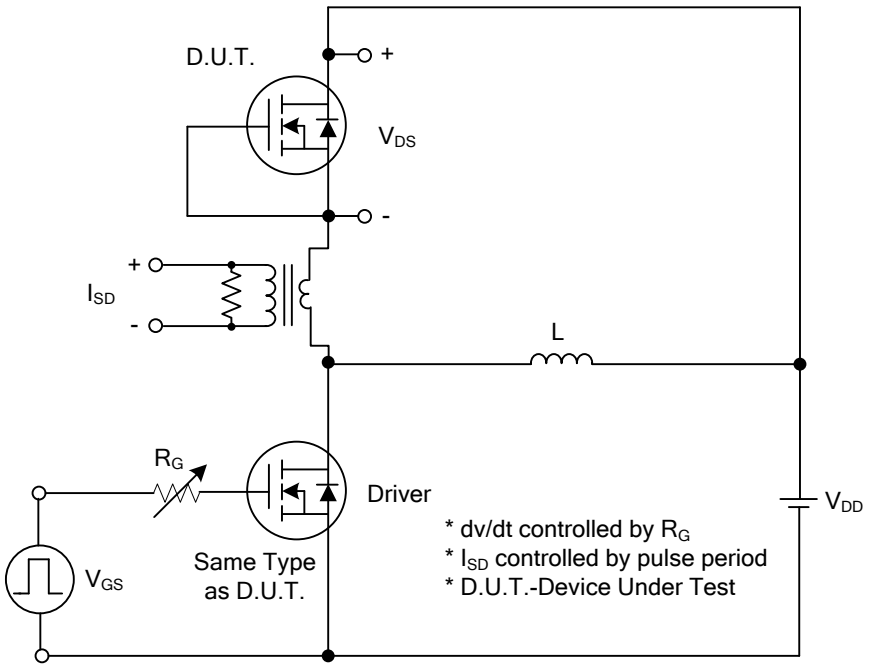


Peak Diode Recovery dv/dt Test Circuit

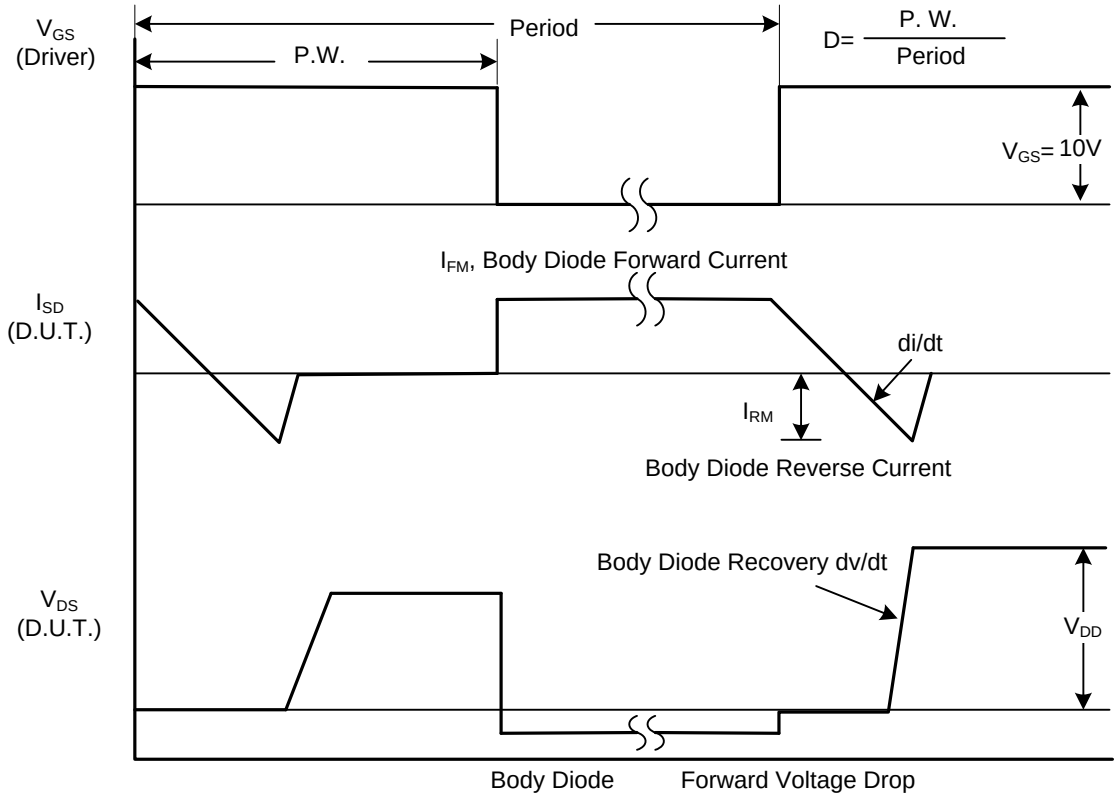


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS

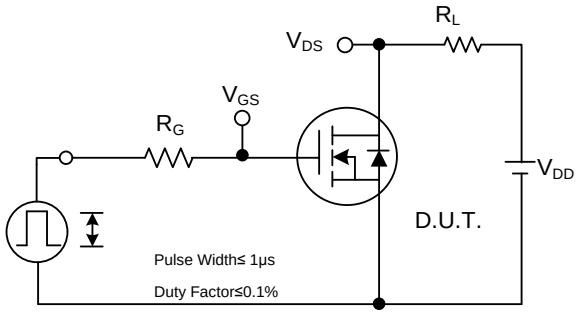


Switching Test Circuit

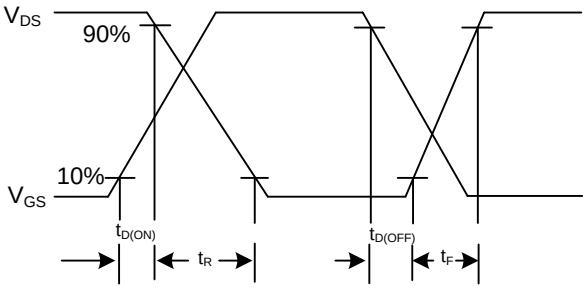


Switching Waveforms

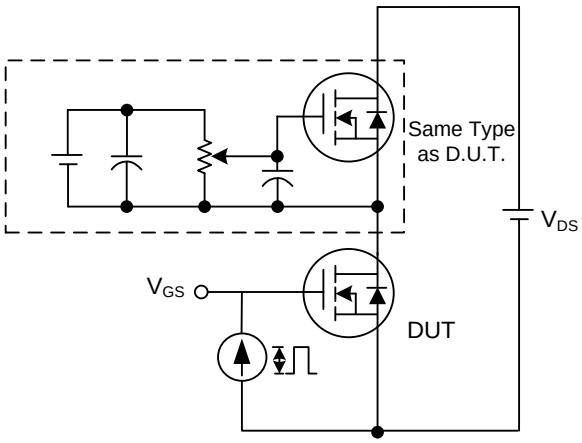


Gate Charge Test Circuit

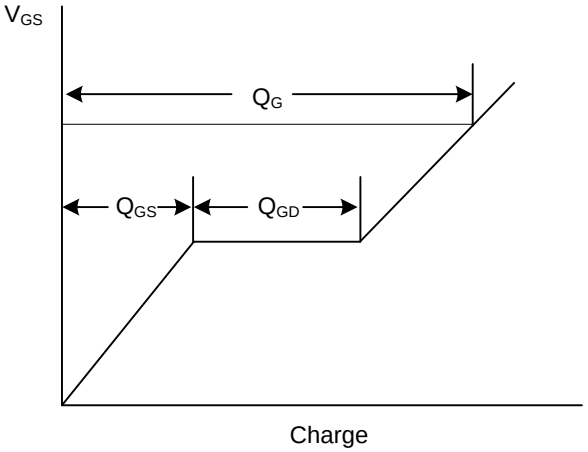

Gate Charge Waveform

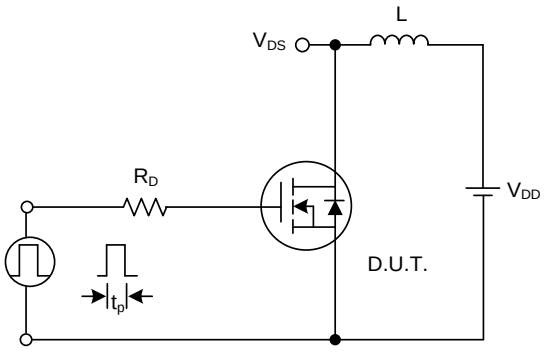


Unclamped Inductive Switching Test Circuit

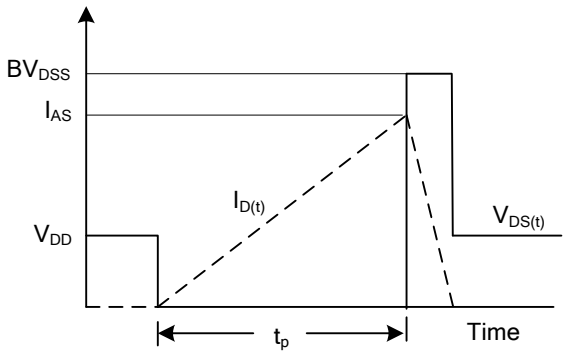


Unclamped Inductive Switching Waveforms

■ TYPICAL CHARACTERISTICS


Drain Current vs. Drain-Source Voltage

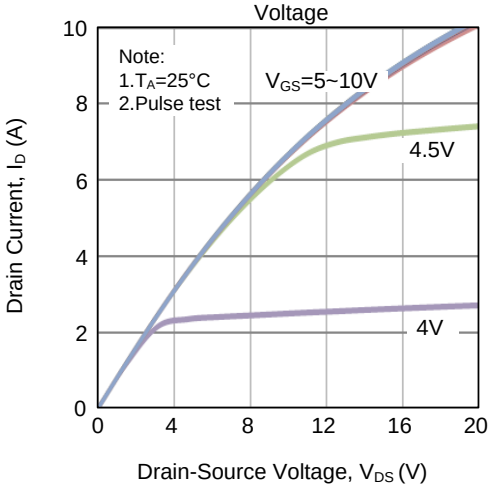


Drain-Source On-Resistance vs. Gate-Source Voltage

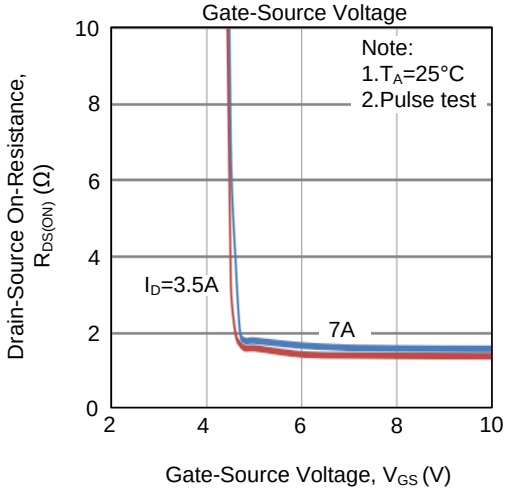


Gate Charge Characteristics

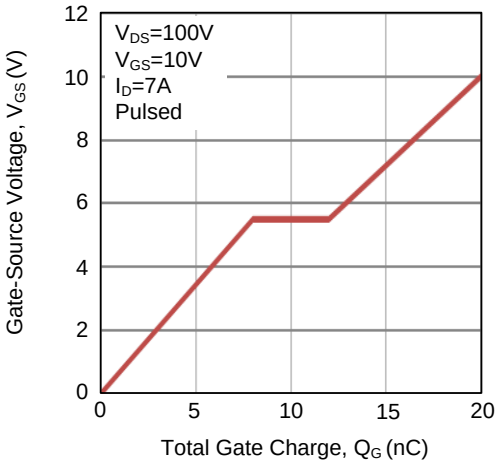


Capacitance Characteristics

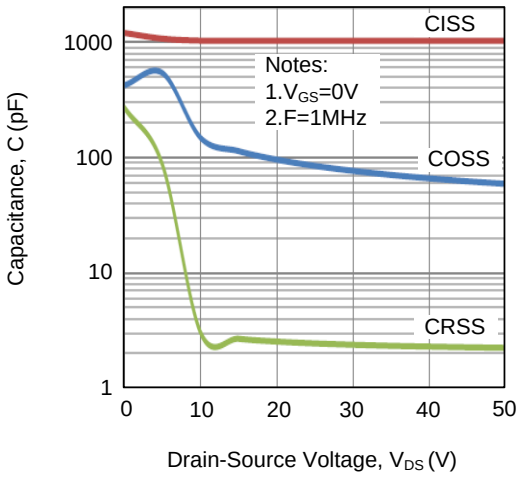

Drain-Source On-Resistance vs. Junction Temperature

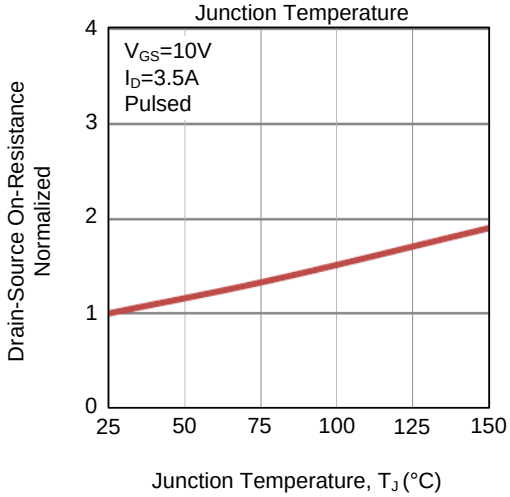


Breakdown Voltage vs. Junction Temperature

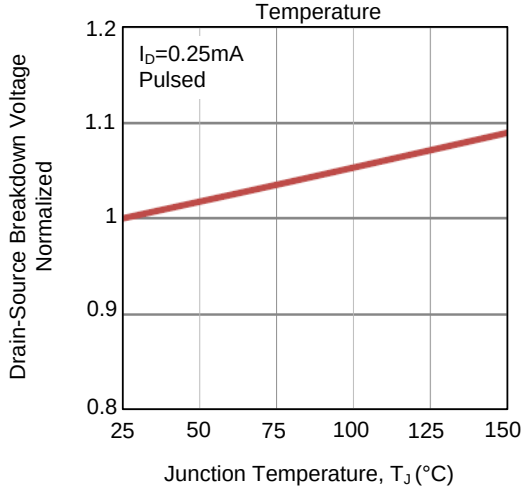


■ TYPICAL CHARACTERISTICS (Cont.)


Gate Threshold Voltage vs. Junction Temperature

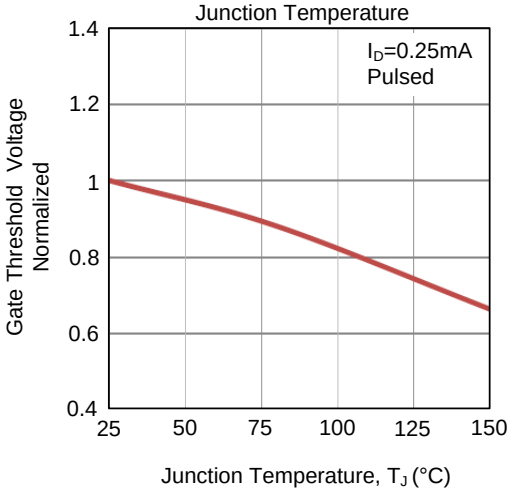


Source Current vs. Source-Drain Voltage

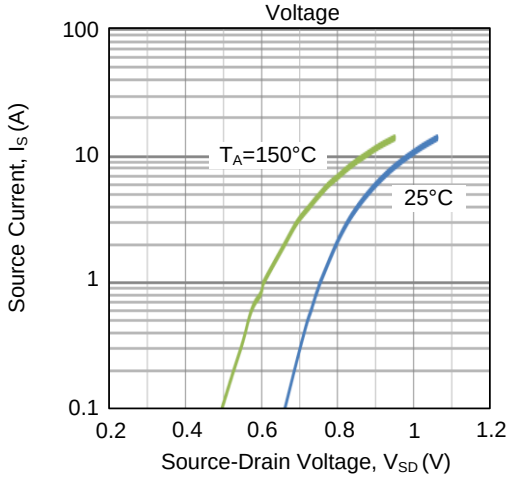


Drain Current vs. Gate-Source Voltage

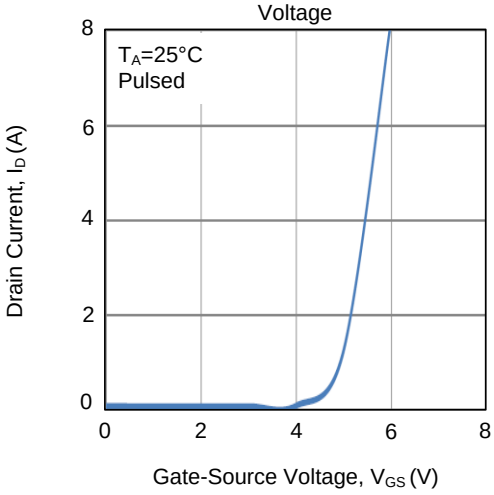


Drain-Source On-Resistance vs. Drain Current

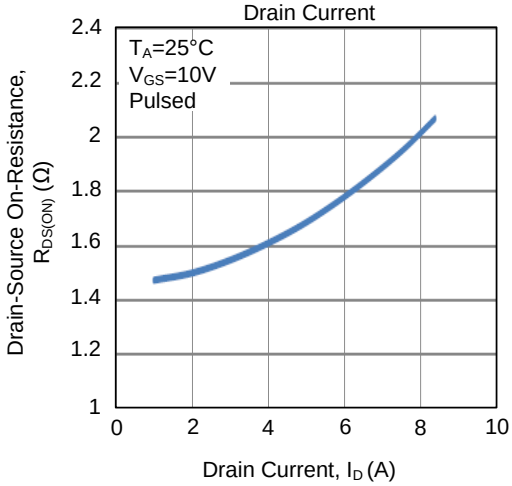


Power Dissipation vs. Junction Temperature

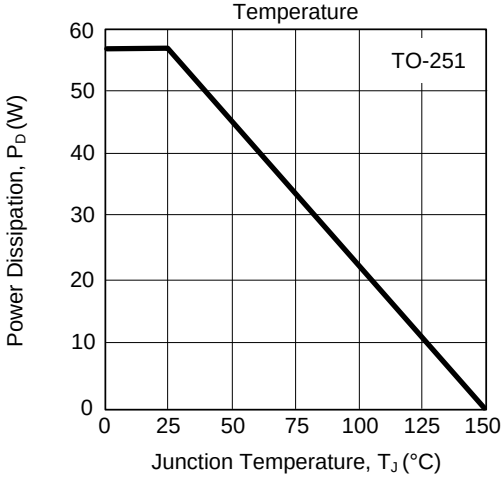

Drain Current vs. Junction Temperature

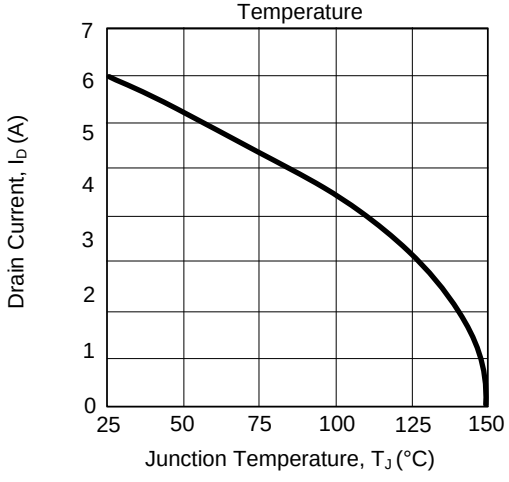

■ TYPICAL CHARACTERISTICS (Cont.)

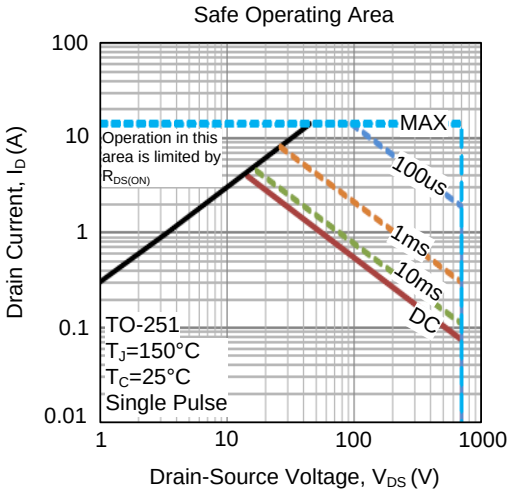

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.