APTCV40H60CT1G

Full - Bridge
CoolMOS & Trench + Field Stop® IGBT
Power module

Trench & Field Stop® IGBT Q1, Q3:
V_{CES} = 600V ; I_C = 50A @ Tc = 80°C

CoolMOS™ Q2, Q4:
V_{DSS} = 600V ; I_D = 36A @ Tc = 25°C

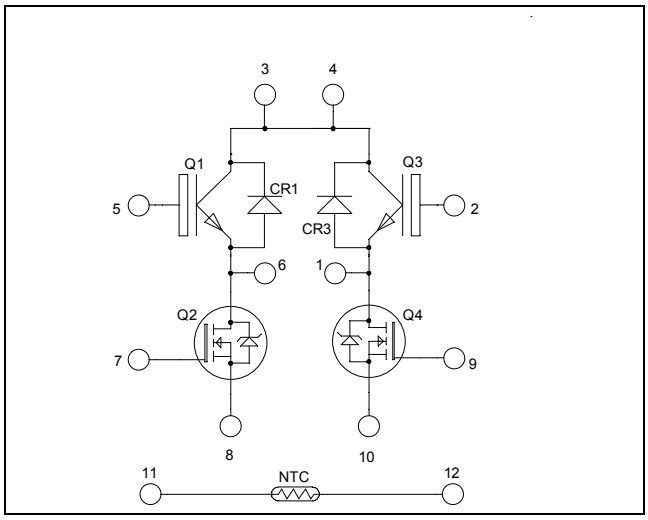

Top switches : Trench + Field Stop IGBT®
Bottom switches : CoolMOS™

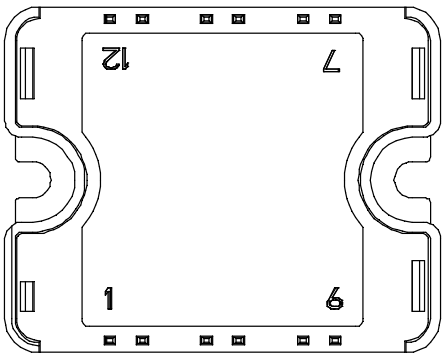

Pins 3/4 must be shorted together

Application

- Solar converter

Features

- ***Q2, Q4 CoolMOS™***
  - Ultra low R_{DSon}
  - Low Miller capacitance
  - Ultra low gate charge
  - Avalanche energy rated
  - Very rugged
  - Fast intrinsic diode
- ***Q1, Q3 Trench & Field Stop IGBT®***
  - Low voltage drop
  - Switching frequency up to 20 kHz
  - RBSOA & SCSOA rated
  - Low tail current
- ***SiC Schottky Diode (CR1, CR3)***
  - Zero reverse recovery
  - Zero forward recovery
  - Temperature Independent switching behavior
  - Positive temperature coefficient on VF
- Very low stray inductance
- Internal thermistor for temperature monitoring
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- RoHS Compliant

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handing Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

All ratings @ T_j = 25°C unless otherwise specified

1. Top switches

1.1 Top Trench + Field Stop IGBT® characteristics

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{CES}	Collector - Emitter Breakdown Voltage		600	V
I_C	Continuous Collector Current	T_C = 25°C	80	A
		T_C = 80°C	50	
I_{CM}	Pulsed Collector Current	T_C = 25°C	100	
V_{GE}	Gate – Emitter Voltage		±20	V
P_D	Maximum Power Dissipation	T_C = 25°C	176	W
RBSOA	Reverse Bias Safe Operating Area	T_J = 150°C	100A @ 550V	

Electrical Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
I_{CES}	Zero Gate Voltage Collector Current	V_{GE} = 0V, V_{CE} = 600V				250	µA
$V_{CE(sat)}$	Collector Emitter Saturation Voltage	V_{GE} =15V I_C = 50A	T_j = 25°C		1.5	1.9	V
			T_j = 150°C		1.7		
$V_{GE(th)}$	Gate Threshold Voltage	V_{GE} = V_{CE} , I_C = 600µA		5.0	5.8	6.5	V
I_{GES}	Gate – Emitter Leakage Current	V_{GE} = 20V, V_{CE} = 0V				600	nA

Dynamic Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
C_{ies}	Input Capacitance	V_{GE} = 0V V_{CE} = 25V f = 1MHz			3150		pF
C_{oes}	Output Capacitance				200		
C_{res}	Reverse Transfer Capacitance				95		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (25°C) V_{GE} = ±15V V_{Bus} = 300V I_C = 50A R_G = 8.2Ω			110		ns
T_r	Rise Time				45		
$T_{d(off)}$	Turn-off Delay Time				200		
T_f	Fall Time				40		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (150°C) V_{GE} = ±15V V_{Bus} = 300V I_C = 50A R_G = 8.2Ω			120		ns
T_r	Rise Time				50		
$T_{d(off)}$	Turn-off Delay Time				250		
T_f	Fall Time				60		
E_{on}	Turn-on Switching Energy	V_{GE} = ±15V V_{Bus} = 300V I_C = 50A R_G = 8.2Ω	T_j = 25°C		0.3		mJ
			T_j = 150°C		0.43		
E_{off}	Turn-off Switching Energy		T_j = 25°C		1.35		mJ
			T_j = 150°C		1.75		
R_{thJC}	Junction to Case Thermal resistance					0.85	°C/W

1.2 Top SiC diode characteristics (CR1, CR3)

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
V_{RRM}	Maximum Peak Repetitive Reverse Voltage			600			V
I_{RM}	Maximum Reverse Leakage Current	V_R=600V	T_j = 25°C		50	200	µA
			T_j = 125°C		100	1000	
$I_{F(AV)}$	Maximum Average Forward Current	50% duty cycle	Tc = 100°C		10		A
V_F	Diode Forward Voltage	I_F = 10A	T_j = 25°C		1.6	1.8	V
			T_j = 175°C		2	2.4	
Q_C	Total Capacitive Charge	I_F = 10A, V_R = 300V di/dt =500A/µs			14		nC
C	Total Capacitance	f = 1MHz, V_R = 200V			65		pF
		f = 1MHz, V_R = 400V			50		
R_{thJC}	Junction to Case Thermal resistance					2.5	°C/W

2. Bottom switches

2.1 Bottom CoolMOS™ characteristics

Absolute maximum ratings

Symbol	Parameter		Max ratings	Unit
V_{DSS}	Drain - Source Breakdown Voltage		600	V
I_D	Continuous Drain Current	T_c = 25°C	36	A
		T_c = 80°C	27	
I_{DM}	Pulsed Drain current		115	
V_{GS}	Gate - Source Voltage		±20	V
R_{DSon}	Drain - Source ON Resistance		83	mΩ
P_D	Maximum Power Dissipation	T_c = 25°C	250	W
I_{AR}	Avalanche current (repetitive and non repetitive)		20	A
E_{AR}	Repetitive Avalanche Energy		1	mJ
E_{AS}	Single Pulse Avalanche Energy		1800	

Electrical Characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS} = 0V,V_{DS} = 600V	T_j = 25°C			100	µA
		V_{GS} = 0V,V_{DS} = 600V	T_j = 125°C			5000	
$R_{DS(on)}$	Drain – Source on Resistance	V_{GS} = 10V, I_D = 24.5A				83	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 3mA		3	4	5	V
I_{GSS}	Gate – Source Leakage Current	V_{GS} = ±20 V, V_{DS} = 0V				100	nA

Dynamic Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
C_{iss}	Input Capacitance	V_{GS} = 0V ; V_{DS} = 25V f = 1MHz		7.2		nF
C_{rss}	Reverse Transfer Capacitance			0.041		
Q_g	Total gate Charge	V_{GS} = 10V V_{Bus} = 300V I_D = 36A		250		nC
Q_{gs}	Gate – Source Charge			43		
Q_{gd}	Gate – Drain Charge			135		
$T_{d(on)}$	Turn-on Delay Time	**Inductive Switching (125°C)** V_{GS} = 10V V_{Bus} = 400V I_D = 36A R_G = 5Ω		21		ns
T_r	Rise Time			30		
$T_{d(off)}$	Turn-off Delay Time			240		
T_f	Fall Time			52		
E_{on}	Turn-on Switching Energy	**Inductive switching @ 25°C** V_{GS} = 10V ; V_{Bus} = 400V I_D = 36A ; R_G = 5Ω		531		µJ
E_{off}	Turn-off Switching Energy			590		
E_{on}	Turn-on Switching Energy	**Inductive switching @ 125°C** V_{GS} = 10V ; V_{Bus} = 400V I_D = 36A ; R_G = 5Ω		762		µJ
E_{off}	Turn-off Switching Energy			725		
R_{thJC}	Junction to Case Thermal resistance				0.5	°C/W

Source - Drain diode ratings and characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
I_S	Continuous Source current (Body diode)		Tc = 25°C		36		A
			Tc = 80°C		27		
V_{SD}	Diode Forward Voltage	V_{GS} = 0V, I_S = - 36A				1.2	V
dv/dt	Peak Diode Recovery ❶					40	V/ns
t_{rr}	Reverse Recovery Time	I_S = - 36A V_R = 350V di_S/dt = 100A/µs	T_j = 25°C		210		ns
			T_j = 125°C		350		
Q_{rr}	Reverse Recovery Charge		T_j = 25°C		2		µC
			T_j = 125°C		5.4		

❶ dv/dt numbers reflect the limitations of the circuit rather than the device itself.
$I_S \leq$ - 36A di/dt ≤ 100A/µs $V_R \leq V_{DSS}$ $T_j \leq$ 150°C

3. Temperature sensor

NTC (see application note APT0406 on www.microsemi.com for more information).

Symbol	*Characteristic*	*Min*	*Typ*	*Max*	*Unit*
R_{25}	Resistance @ 25°C		50		kΩ
$B_{25/85}$	T_{25} = 298.15 K		3952		K

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$

T: Thermistor temperature
R_T: Thermistor value at T

4. Package characteristics

Symbol	*Characteristic*			*Min*	*Typ*	*Max*	*Unit*
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, 50/60Hz			4000			V
T_J	Operating junction temperature range			-40		150*	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To heatsink	M4	2		3	N.m
Wt	Package Weight					80	g

Tj=175°C for Trench & Field Stop IGBT

5. SP1 Package outline (dimensions in mm)

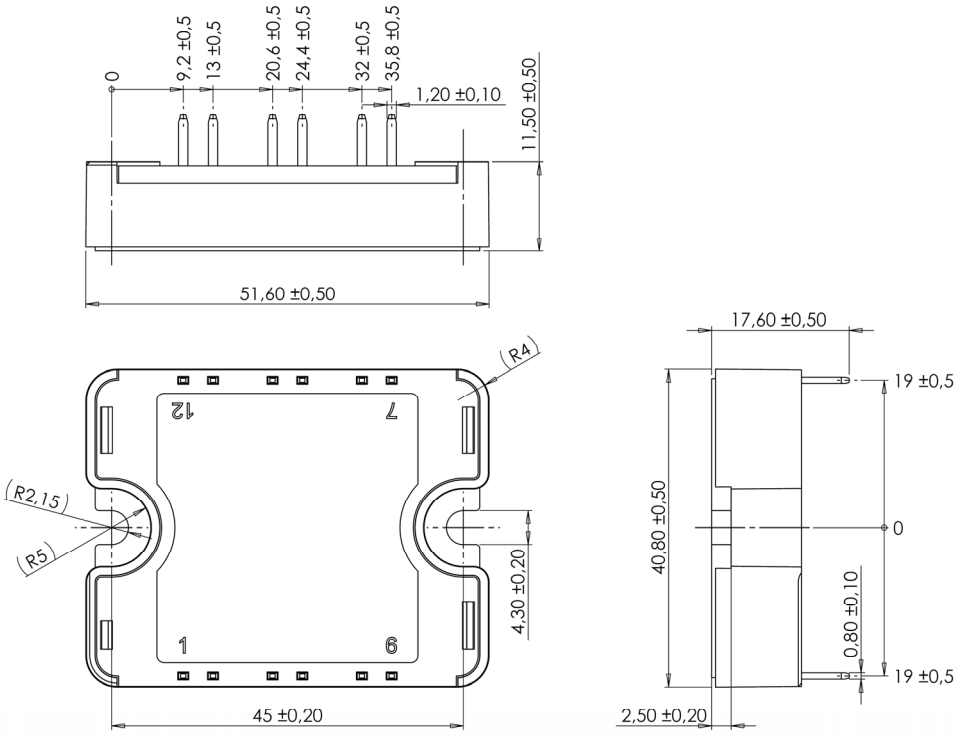

See application note 1904 - Mounting Instructions for SP1 Power Modules on www.microsemi.com

6. Top switches curves

6.1 Top Trench + Field Stop IGBT® typical performance curves

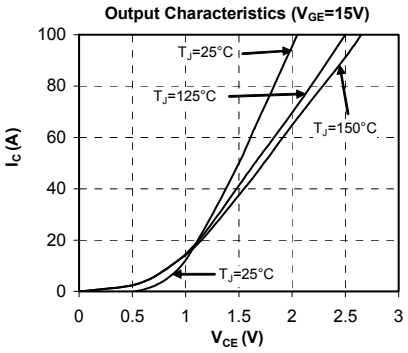

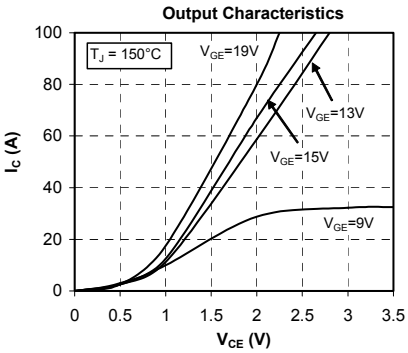

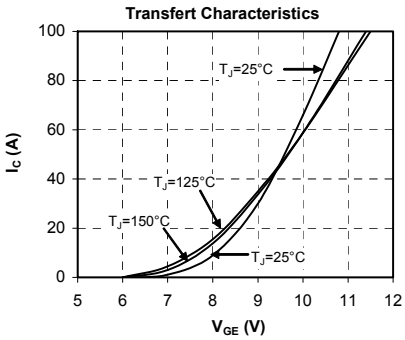

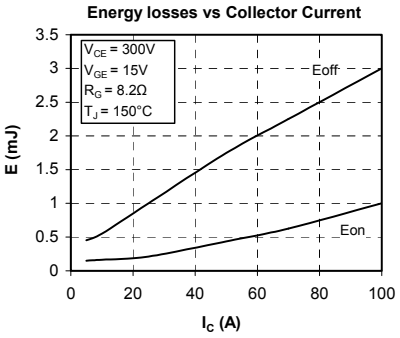

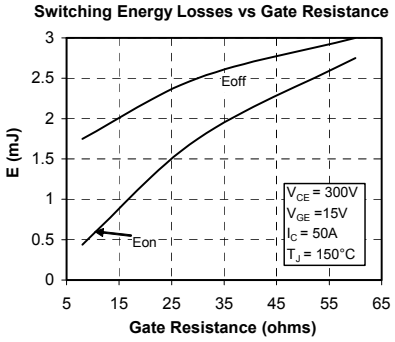

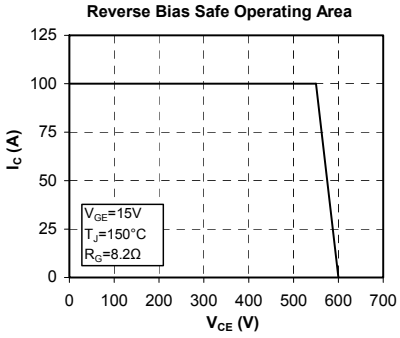

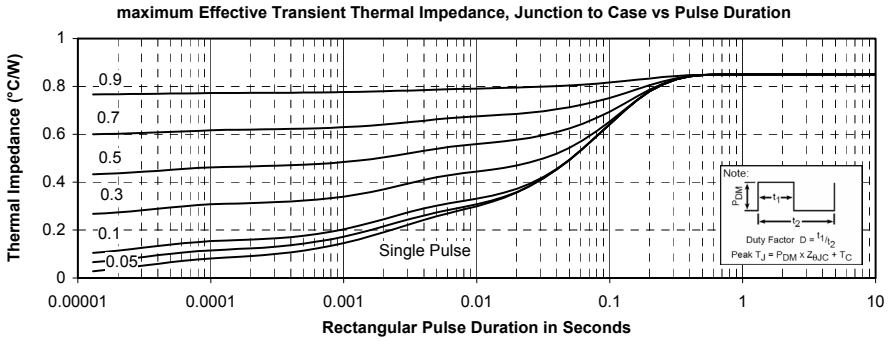

6.2 Top SiC diode typical performance curves

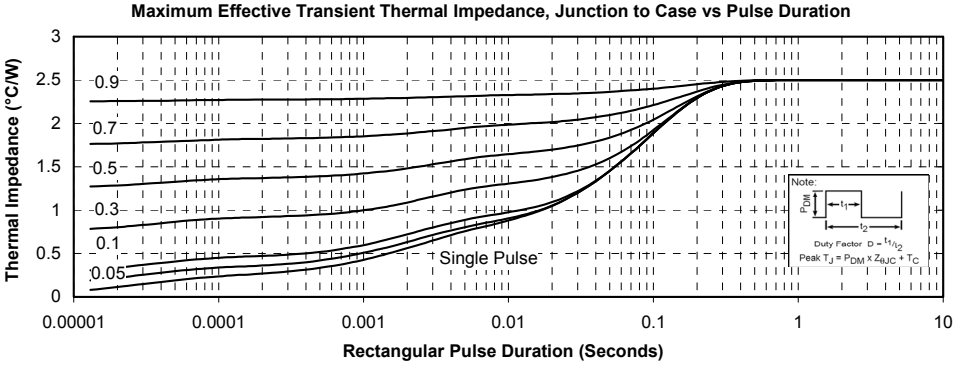

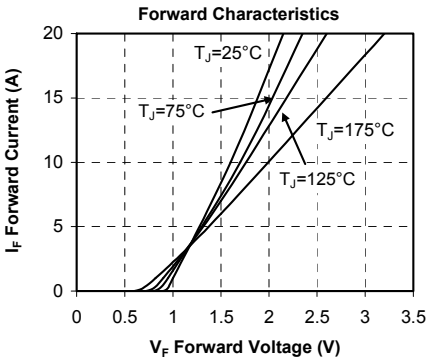

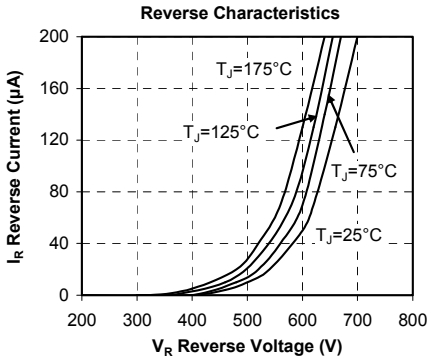

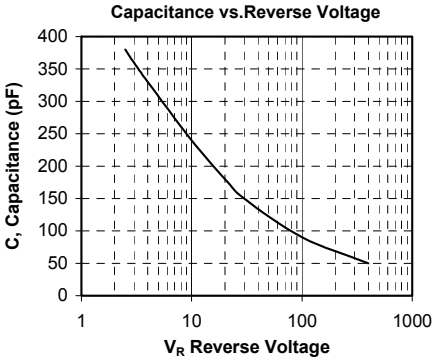

7. Bottom switches curves

7.1 Bottom CoolMOS™ typical performance curves

Maximum Effective Transient Thermal Impedance, Junction to Case vs Pulse Duration

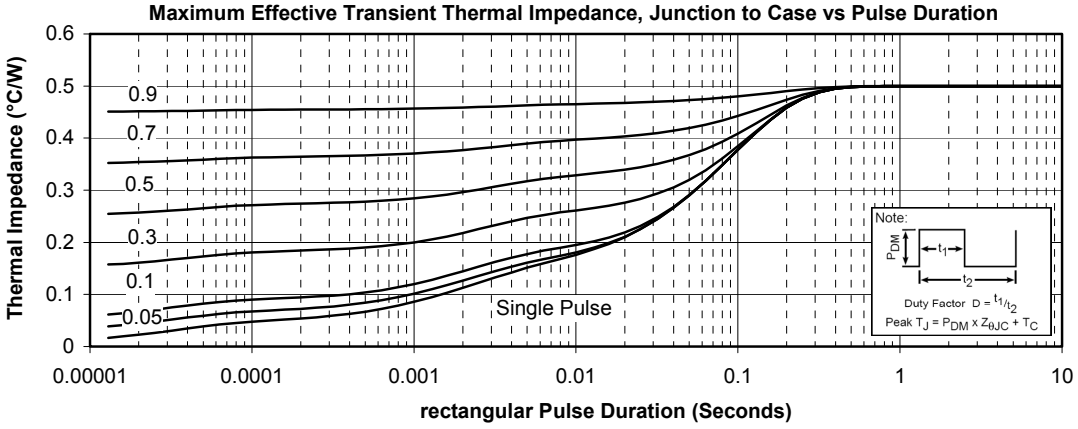

Low Voltage Output Characteristics

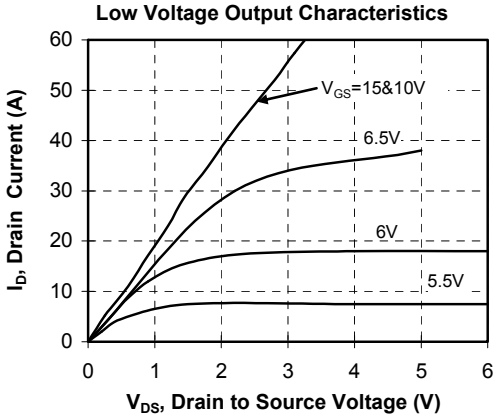

Transfert Characteristics

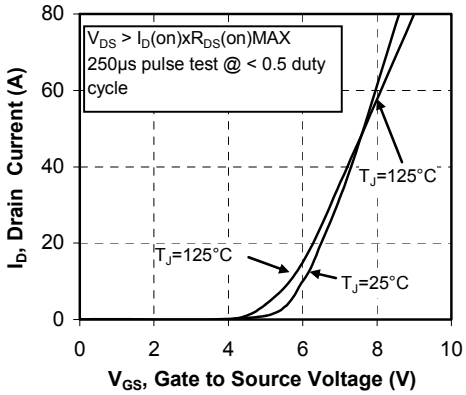

R_{DS}(on) vs Drain Current

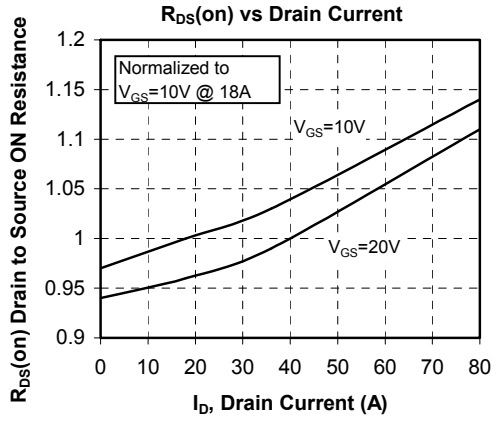

DC Drain Current vs Case Temperature

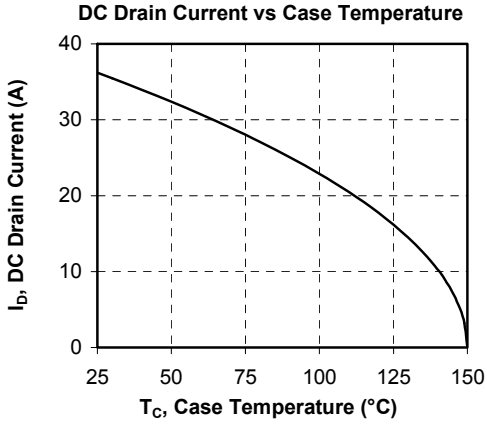

Breakdown Voltage vs Temperature

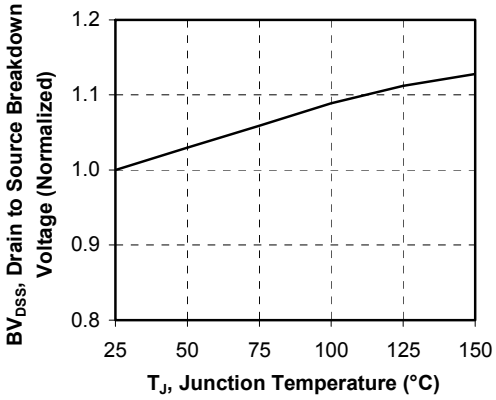

ON resistance vs Temperature

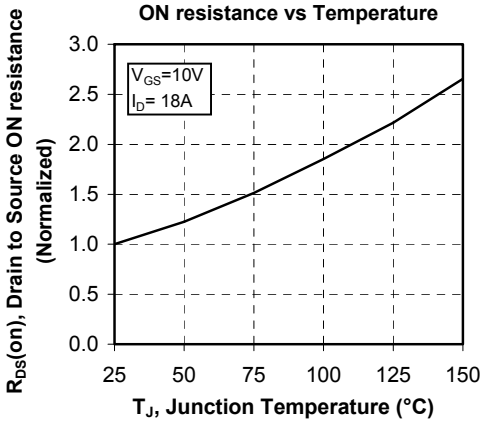

Threshold Voltage vs Temperature

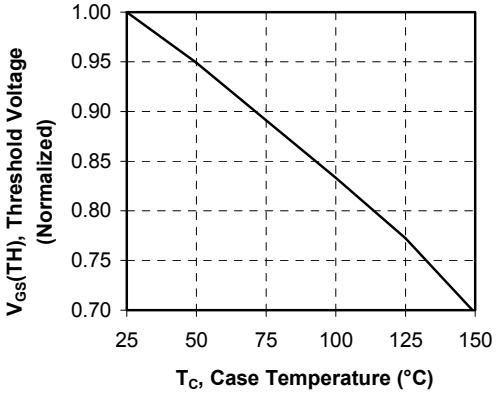

Maximum Safe Operating Area

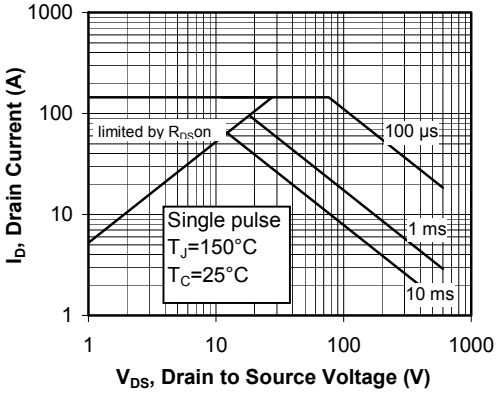

Capacitance vs Drain to Source Voltage

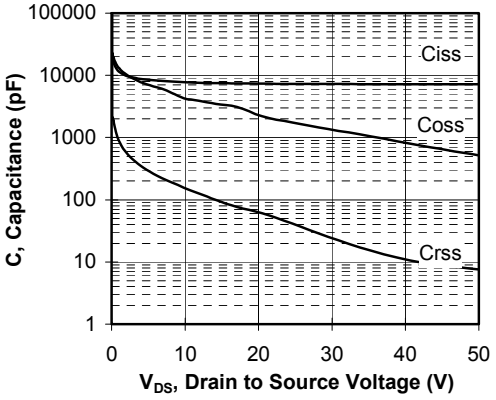

Gate Charge vs Gate to Source Voltage

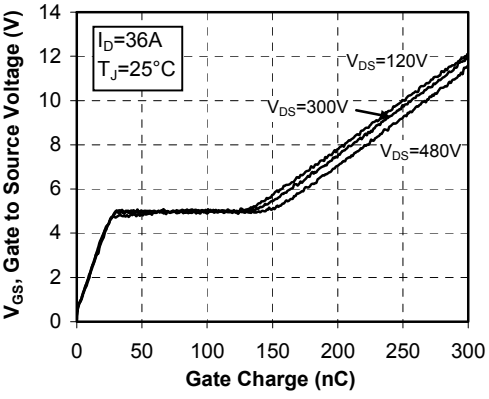

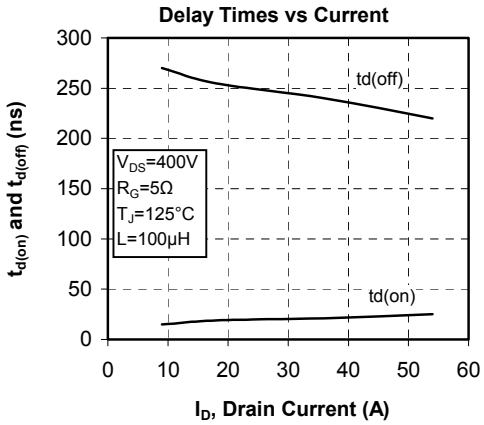

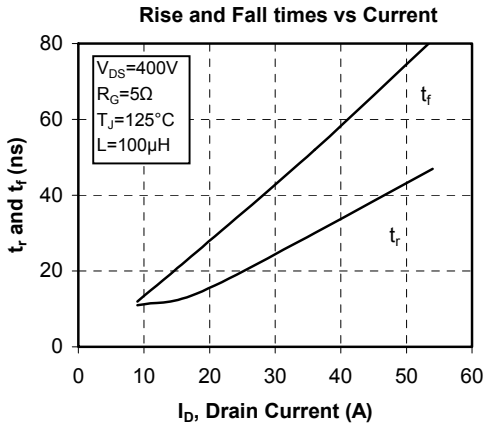

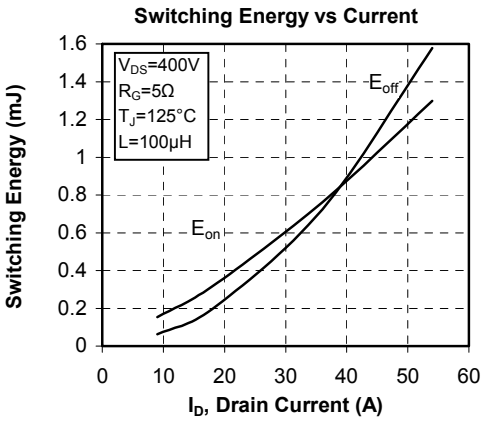

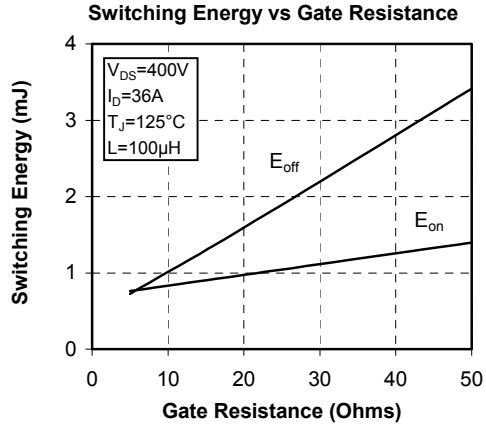

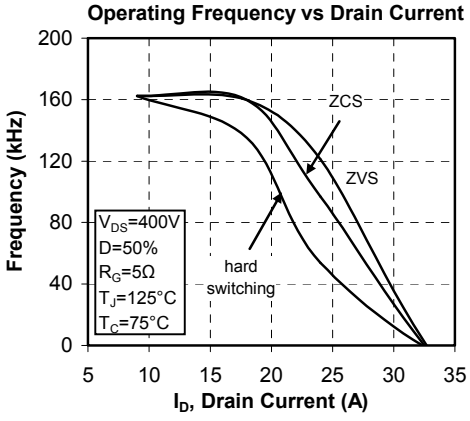

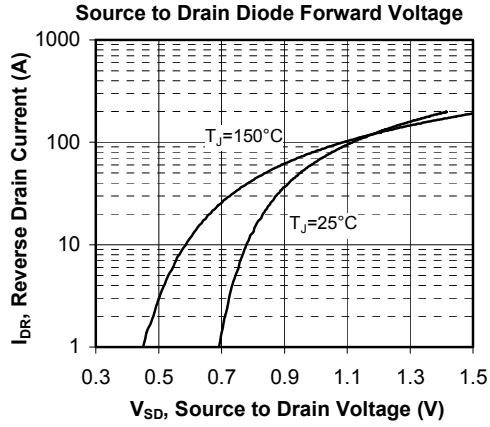

"COOLMOS™ comprise a new family of transistors developed by Infineon Technologies AG. "COOLMOS" is a trademark of Infineon Technologies AG".

DISCLAIMER

The information contained in the document (unless it is publicly available on the Web without access restrictions) is PROPRIETARY AND CONFIDENTIAL information of Microsemi and cannot be copied, published, uploaded, posted, transmitted, distributed or disclosed or used without the express duly signed written consent of Microsemi. If the recipient of this document has entered into a disclosure agreement with Microsemi, then the terms of such Agreement will also apply. This document and the information contained herein may not be modified, by any person other than authorized personnel of Microsemi. No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the information, either expressly, by implication, inducement, estoppels or otherwise. Any license under such intellectual property rights must be approved by Microsemi in writing signed by an officer of Microsemi.

Microsemi reserves the right to change the configuration, functionality and performance of its products at anytime without any notice. This product has been subject to limited testing and should not be used in conjunction with life-support or other mission-critical equipment or applications. Microsemi assumes no liability whatsoever, and Microsemi disclaims any express or implied warranty, relating to sale and/or use of Microsemi products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Any performance specifications believed to be reliable but are not verified and customer or user must conduct and complete all performance and other testing of this product as well as any user or customers final application. User or customer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the customer's and user's responsibility to independently determine suitability of any Microsemi product and to test and verify the same. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the User. Microsemi specifically disclaims any liability of any kind including for consequential, incidental and punitive damages as well as lost profit. The product is subject to other terms and conditions which can be located on the web at http://www.microsemi.com/legal/tnc.asp

Life Support Application

Seller's Products are not designed, intended, or authorized for use as components in systems intended for space, aviation, surgical implant into the body, in other applications intended to support or sustain life, or for any other application in which the failure of the Seller's Product could create a situation where personal injury, death or property damage or loss may occur (collectively "Life Support Applications").
Buyer agrees not to use Products in any Life Support Applications and to the extent it does it shall conduct extensive testing of the Product in such applications and further agrees to indemnify and hold Seller, and its officers, employees, subsidiaries, affiliates, agents, sales representatives and distributors harmless against all claims, costs, damages and expenses, and attorneys' fees and costs arising, directly or directly, out of any claims of personal injury, death, damage or otherwise associated with the use of the goods in Life Support Applications, even if such claim includes allegations that Seller was negligent regarding the design or manufacture of the goods.

Buyer must notify Seller in writing before using Seller's Products in Life Support Applications. Seller will study with Buyer alternative solutions to meet Buyer application specification based on Sellers sales conditions applicable for the new proposed specific part.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.