
IXYS

X3-Class HiPerFET™ Power MOSFET


IXFA26N65X3

V_{DSS} = 650V
I_{D25} = 26A
$R_{DS(on)}$ ≤ 155mΩ

N-Channel Enhancement Mode
Avalanche Rated



TO-263 (IXFA)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	650	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	650	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	26	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	32	A
I_A	T_C = 25°C	5	A
E_{AS}	T_C = 25°C	750	mJ
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	50	V/ns
P_D	T_C = 25°C	357	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_{SOLD}	Plastic Body for 10s	260	°C
F_C	Mounting Force	10..65 / 2.2..14.6	N/lb
Weight		2.5	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 1mA	650			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 2.5mA	3.2		5.2	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			25	μA
	T_J = 125°C			3	mA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1			155	mΩ

Features

- International Standard Package
- Low $R_{DS(ON)}$ and Q_G
- Avalanche Rated
- Low Package Inductance

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

©2022 Littelfuse, Inc.

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
g_{fs}	V_{DS} = 20V, I_D = 0.5 • I_{D25}, Note 1	9	15		S
R_{Gi}	Gate Input Resistance		2.3		Ω
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		1500		pF
C_{oss}			2270		pF
C_{rss}			7		pF
	Effective Output Capacitance				
$C_{o(er)}$	Energy related: V_{GS} = 0V, V_{DS} = 0.8 • V_{DSS}		70		pF
$C_{o(tr)}$	Time related: V_{GS} = 0V, V_{DS} = 0.8 • V_{DSS}		345		pF
$t_{d(on)}$	**Resistive Switching Times**		23		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		33		ns
$t_{d(off)}$	R_G = 10Ω (External)		30		ns
t_f			12		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		20.0		nC
Q_{gs}			8.6		nC
Q_{gd}			6.7		nC
R_{thJC}				0.35	°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
I_S	V_{GS} = 0V			26	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			104	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 13A, -di/dt = 100A/μs		190		ns
Q_{RM}	V_R = 100V		1.2		μC
I_{RM}			13.0		A

Note: 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

Littelfuse reserves the right to change limits, test conditions and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123B1 6,306,728B1 6,404,065B1 6,534,343 6,583,505 6,683,344 6,710,405B2 6,710,463 6,727,585 6,759,692 6,771,478B2 7,005,734B2 7,063,975B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

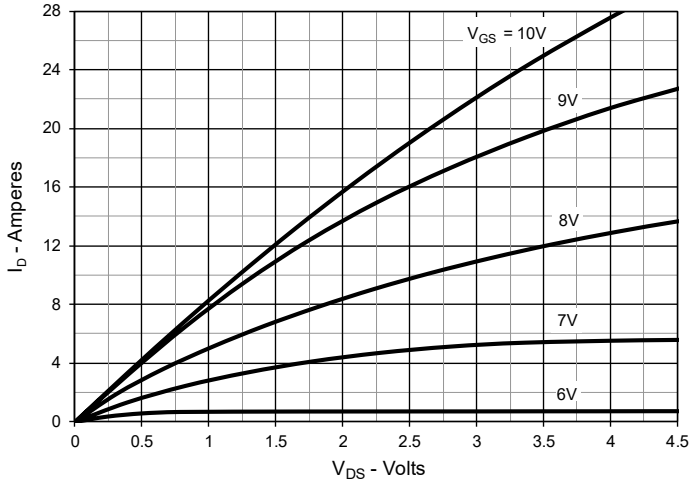


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

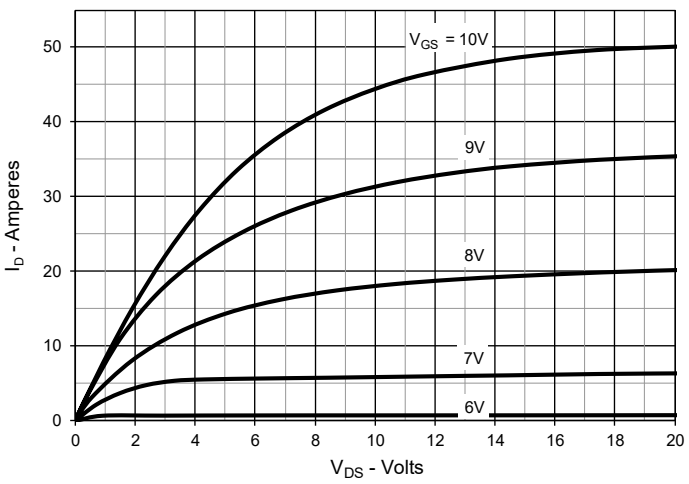


Fig. 3. Output Characteristics @ T_J = 125ºC

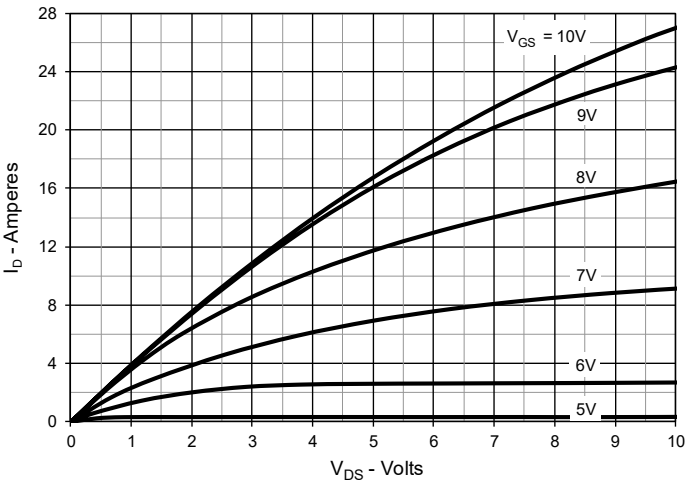


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 13A Value vs. Junction Temperature

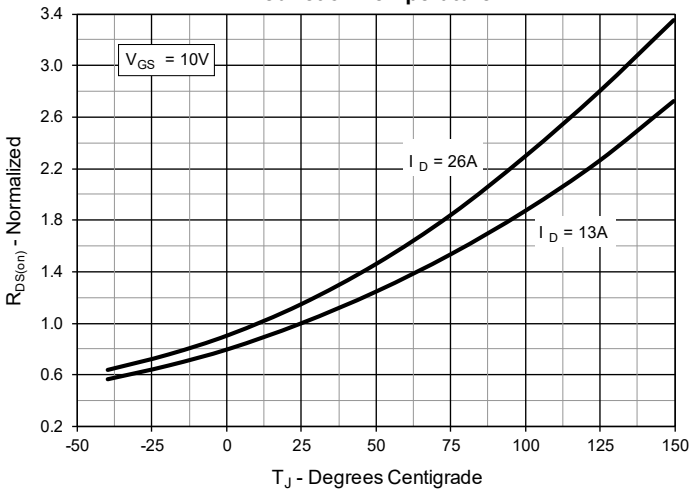


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 13A Value vs. Drain Current


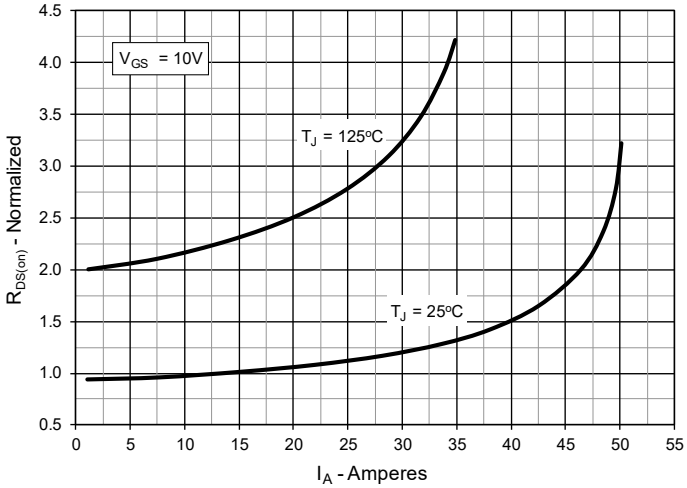


Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature

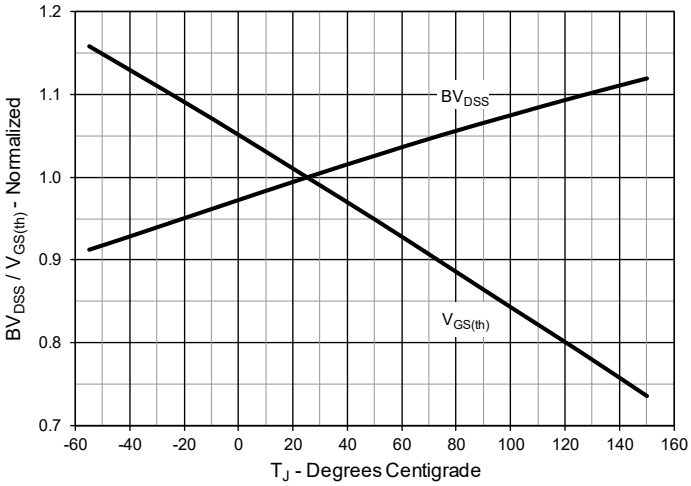

©2022 Littelfuse, Inc.

Fig. 7. Maximum Drain Current vs. Case Temperature

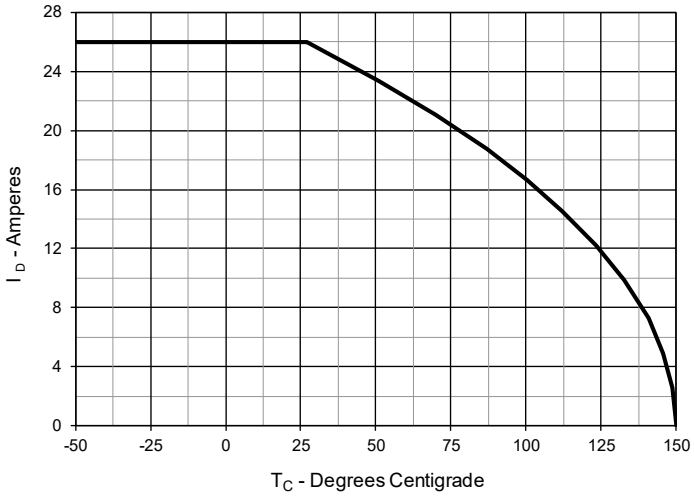


Fig. 8. Input Admittance

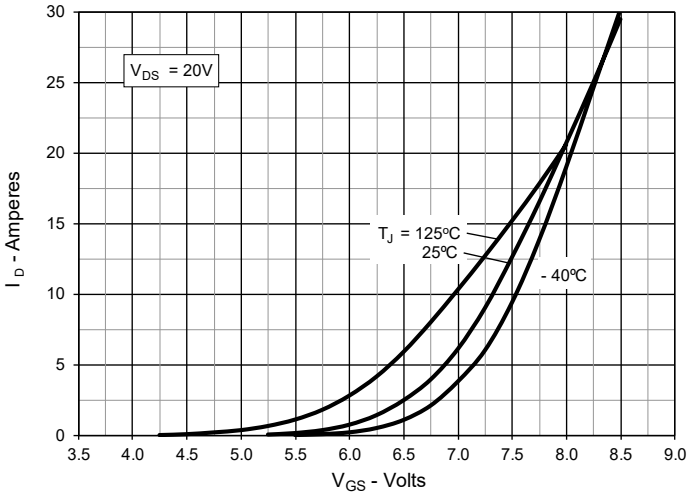


Fig. 9. Transconductance

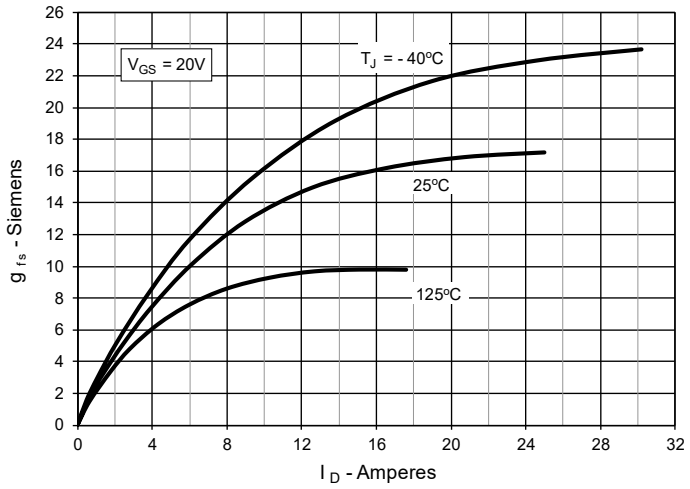


Fig. 10. Forward Voltage Drop of Intrinsic Diode

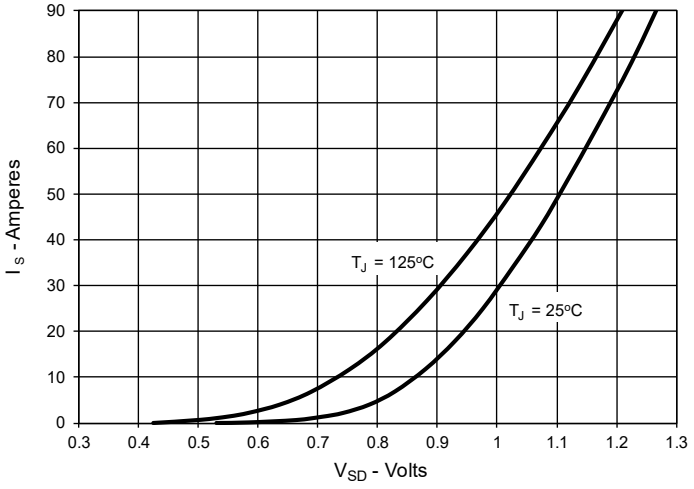


Fig. 11. Gate Charge


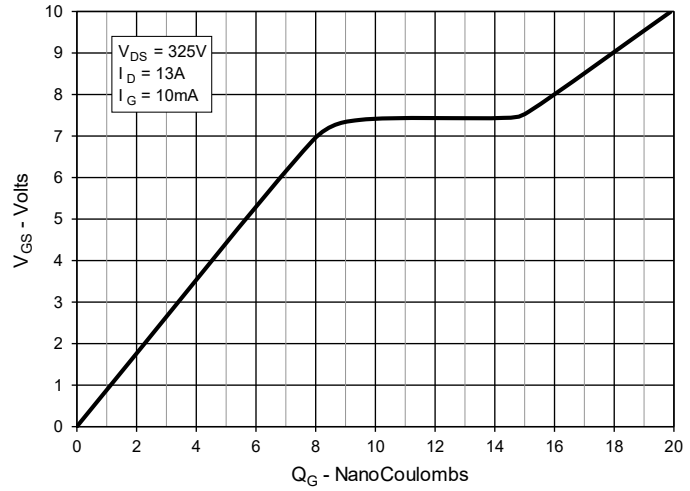


Fig. 12. Capacitance

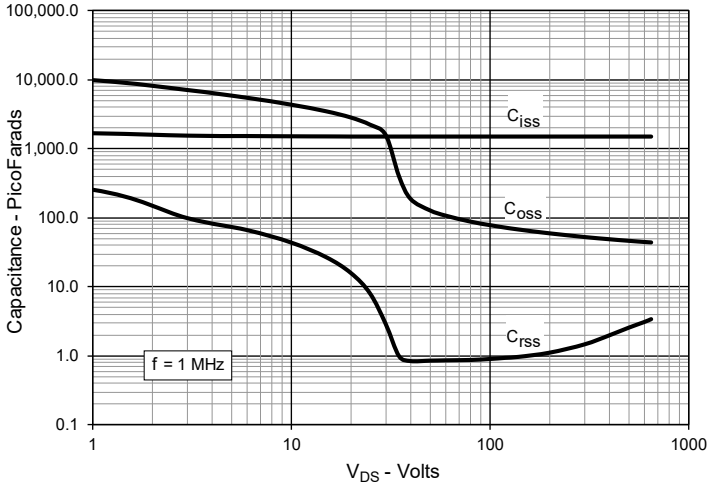

Littelfuse reserves the right to change limits, test conditions and dimensions.

Fig. 13. Output Capacitance Stored Energy

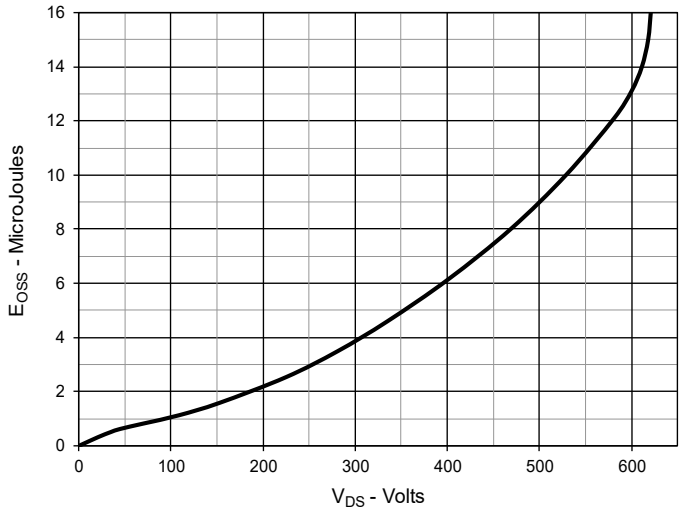


Fig. 14. Forward-Bias Safe Operating Area



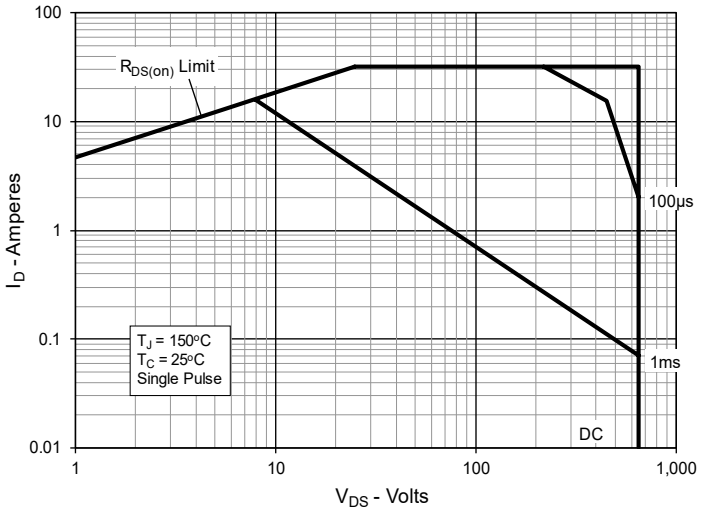


Fig. 15. Maximum Transient Thermal Impedance

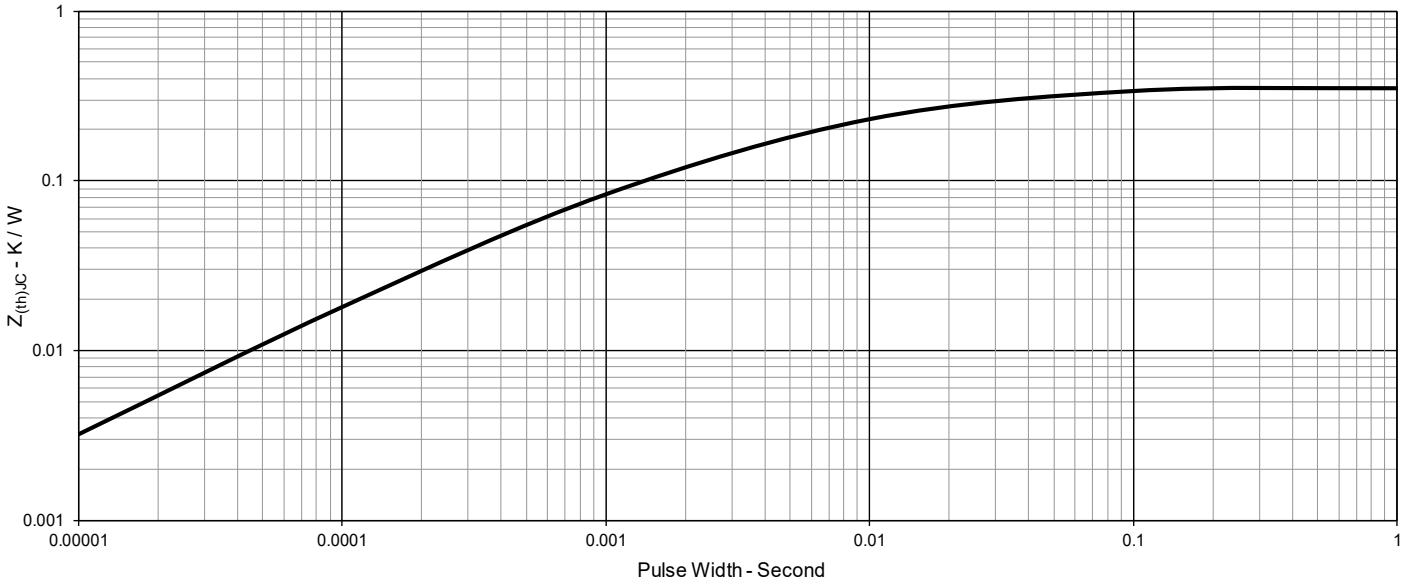

©2022 Littelfuse, Inc.

TO-263 Outline

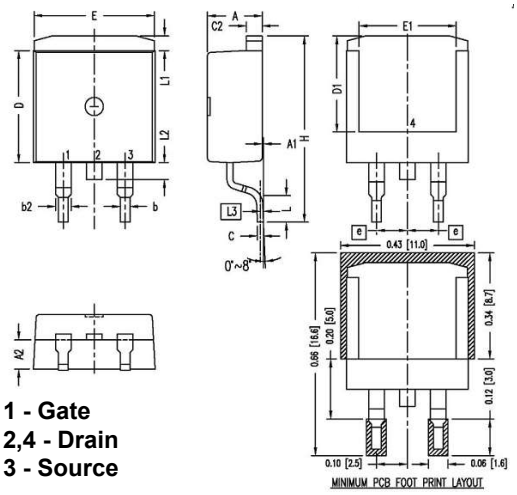

1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	.170	.185	4.30	4.70
A1	.000	.008	0.00	0.20
A2	.091	.098	2.30	2.50
b	.028	.035	0.70	0.90
b2	.046	.060	1.18	1.52
C	.018	.024	0.45	0.60
C2	.049	.060	1.25	1.52
D	.340	.370	8.63	9.40
D1	.300	.327	7.62	8.30
E	.380	.410	9.65	10.41
E1	.270	.330	6.86	8.38
e	.100 BSC		2.54 BSC	
H	.580	.620	14.73	15.75
L	.075	.105	1.91	2.67
L1	.039	.060	1.00	1.52
L2	—	.070	—	1.77
L3	.010 BSC		0.254 BSC	

IXYS
A Littelfuse Technology

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Littelfuse reserves the right to change limits, test conditions and dimensions.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.