Preliminary datasheet
EconoPIM™2 module with TRENCHSTOP™IGBT7 and Emitter Controlled 7 diode and NTC

Features



- Electrical features
  - V_{CES} = 1200 V
  - $I_{C\ nom}$ = 35 A / I_{CRM} = 70 A
  - TRENCHSTOP™ IGBT7
  - Low V_{CEsat}
  - Overload operation up to 175°C
- Mechanical features
  - High power and thermal cycling capability
  - Integrated NTC temperature sensor
  - Copper base plate
  - Al_2O_3 substrate with low thermal resistance
  - Solder contact technology

Potential applications

- Auxiliary inverters
- Motor drives
- Servo drives

Product validation

- Qualified for industrial applications according to the relevant tests of IEC 60747, 60749 and 60068

Description

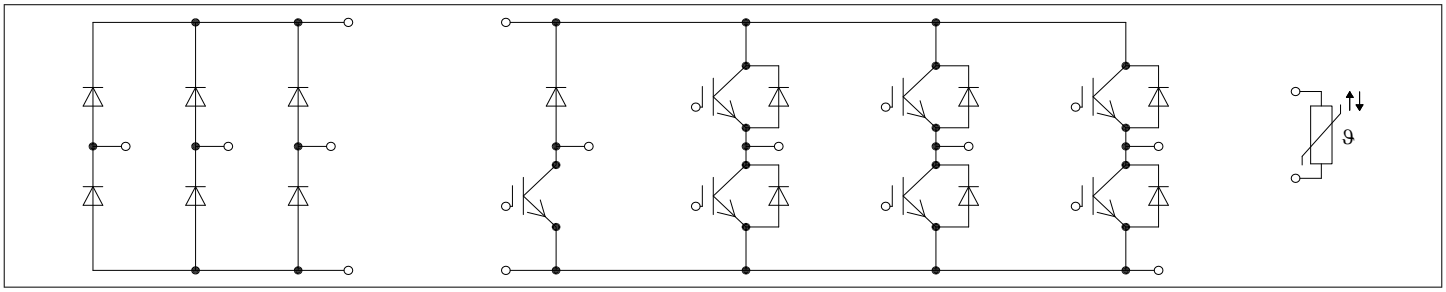

Table of contents

	Description	1
	Features	1
	Potential applications	1
	Product validation	1
	Table of contents	2
1	**Package**	3
2	**IGBT, Inverter**	3
3	**Diode, Inverter**	5
4	**Diode, Rectifier**	6
5	**IGBT-Chopper**	7
6	**Diode, Chopper**	8
7	**NTC-Thermistor**	9
8	**Characteristics diagrams**	11
9	**Circuit diagram**	17
10	**Package outlines**	18
11	**Module label code**	19
	Revision history	20
	Disclaimer	21

1 Package

Table 1 Insulation coordination

Parameter	Symbol	Note or test condition	Values	Unit
Isolation test voltage	V_{ISOL}	RMS, f = 50 Hz, *t* = 1 min	2.5	kV
Material of module baseplate			Cu	
Internal Isolation		basic insulation (class 1, IEC 61140)	Al_2O_3	
Creepage distance	d_{Creep}	terminal to heatsink	10.0	mm
Clearance	d_{Clear}	terminal to heatsink	7.5	mm
Comparative tracking index	*CTI*		> 200	
RTI Elec.	*RTI*	housing	140	°C

Table 2 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Stray inductance module	L_{sCE}				35		nH
Module lead resistance, terminals - chip	$R_{AA'+CC'}$	T_C=25°C, per switch			6.9		mΩ
Module lead resistance, terminals - chip	$R_{CC'+EE'}$	T_C=25°C, per switch			5.9		mΩ
Storage temperature	T_{stg}			-40		125	°C
Mounting torque for modul mounting	*M*	- Mounting according to valid application note	M5, Screw	3		6	Nm
Weight	*G*				180		g

2 IGBT, Inverter

Table 3 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	V_{CES}		T_{vj} = 25 °C	1200	V
Continous DC collector current	I_{CDC}	$T_{vj\,max}$ = 175 °C	T_C = 105 °C	35	A
Repetitive peak collector current	I_{CRM}	t_P = 1 ms		70	A
Gate-emitter peak voltage	V_{GES}			±20	V

Table 4 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\,sat}$	I_C = 35 A, V_{GE} = 15 V	T_{vj} = 25 °C		1.60	TBD	V
			T_{vj} = 125 °C		1.74		
			T_{vj} = 175 °C		1.82		
Gate threshold voltage	V_{GEth}	I_C = 0.75 mA, V_{CE} = V_{GE}, T_{vj} = 25 °C		5.15	5.80	6.45	V
Gate charge	Q_G	V_{GE} = ±15 V, V_{CE} = 600 V			0.548		µC
Internal gate resistor	R_{Gint}	T_{vj} = 25 °C			0		Ω
Input capacitance	C_{ies}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			6.62		nF
Reverse transfer capacitance	C_{res}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			0.023		nF
Collector-emitter cut-off current	I_{CES}	V_{CE} = 1200 V, V_{GE} = 0 V	T_{vj} = 25 °C			0.007	mA
Gate-emitter leakage current	I_{GES}	V_{CE} = 0 V, V_{GE} = 20 V, T_{vj} = 25 °C				100	nA
Turn-on delay time (inductive load)	t_{don}	I_C = 35 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Gon} = 8.2 Ω	T_{vj} = 25 °C		0.051		µs
			T_{vj} = 125 °C		0.052		
			T_{vj} = 175 °C		0.053		
Rise time (inductive load)	t_r	I_C = 35 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Gon} = 8.2 Ω	T_{vj} = 25 °C		0.037		µs
			T_{vj} = 125 °C		0.040		
			T_{vj} = 175 °C		0.042		
Turn-off delay time (inductive load)	t_{doff}	I_C = 35 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Goff} = 8.2 Ω	T_{vj} = 25 °C		0.250		µs
			T_{vj} = 125 °C		0.330		
			T_{vj} = 175 °C		0.350		
Fall time (inductive load)	t_f	I_C = 35 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Goff} = 8.2 Ω	T_{vj} = 25 °C		0.120		µs
			T_{vj} = 125 °C		0.220		
			T_{vj} = 175 °C		0.290		
Turn-on energy loss per pulse	E_{on}	I_C = 35 A, V_{CE} = 600 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Gon} = 8.2 Ω, di/dt = 725 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		2.9		mJ
			T_{vj} = 125 °C		4		
			T_{vj} = 175 °C		4.66		
Turn-off energy loss per pulse	E_{off}	I_C = 35 A, V_{CE} = 600 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Goff} = 8.2 Ω, dv/dt = 3150 V/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		2.22		mJ
			T_{vj} = 125 °C		3.58		
			T_{vj} = 175 °C		4.4		
SC data	I_{SC}	V_{GE} ≤ 15 V, V_{CC} = 800 V, V_{CEmax}=V_{CES}-L_{sCE}*di/dt	t_P ≤ 8 µs, T_{vj} = 150 °C		110		A
			t_P ≤ 7 µs, T_{vj} = 175 °C		100		

Table 4 Characteristic values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Thermal resistance, junction to case	R_{thJC}	per IGBT			0.802	K/W
Thermal resistance, case to heatsink	R_{thCH}	per IGBT, λ_{grease}= 1 W/(m*K)		0.157		K/W
Temperature under switching conditions	$T_{vj\,op}$		-40		175	°C

Note: $T_{vj\,op}$ > 150°C is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

3 Diode, Inverter

Table 5 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}		T_{vj} = 25 °C	1200	V
Continous DC forward current	I_F			35	A
Repetitive peak forward current	I_{FRM}	t_P = 1 ms		70	A
I^2t - value	I^2t	t_P = 10 ms, V_R = 0 V	T_{vj} = 125 °C	210	A^2s
			T_{vj} = 175 °C	200	

Table 6 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	I_F = 35 A, V_{GE} = 0 V	T_{vj} = 25 °C		1.72	TBD	V
			T_{vj} = 125 °C		1.59		
			T_{vj} = 175 °C		1.52		
Peak reverse recovery current	I_{RM}	V_R = 600 V, I_F = 35 A, V_{GE} = -15 V, -di_F/dt = 725 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		21		A
			T_{vj} = 125 °C		27		
			T_{vj} = 175 °C		31		
Recovered charge	Q_r	V_R = 600 V, I_F = 35 A, V_{GE} = -15 V, -di_F/dt = 725 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		2.77		µC
			T_{vj} = 125 °C		4.93		
			T_{vj} = 175 °C		6.66		

Table 6 Characteristic values (continued)

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Reverse recovery energy	E_{rec}	V_R = 600 V, I_F = 35 A, V_{GE} = -15 V, -di$_F$/dt = 725 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		1.04		mJ
			T_{vj} = 125 °C		1.81		
			T_{vj} = 175 °C		2.47		
Thermal resistance, junction to case	R_{thJC}	per diode				1.10	K/W
Thermal resistance, case to heatsink	R_{thCH}	per diode, λ_{grease}= 1 W/(m*K)			0.176		K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		175	°C

Note: $T_{vj\,op}$ > 150°C is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

4 Diode, Rectifier

Table 7 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}	T_{vj} = 25 °C		1600	V
Maximum RMS forward current per chip	I_{FRMSM}	T_C = 80 °C		70	A
Maximum RMS current at rectifier output	I_{RMSM}	T_C = 80 °C		100	A
Surge forward current	I_{FSM}	t_P = 10 ms	T_{vj} = 25 °C	560	A
			T_{vj} = 150 °C	435	
I^2t - value	I^2t	t_P = 10 ms	T_{vj} = 25 °C	1570	A^2s
			T_{vj} = 150 °C	945	

Table 8 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	I_F = 35 A	T_{vj} = 150 °C		0.95		V
Reverse current	I_r	T_{vj} = 150 °C, V_R = 1600 V			1		mA
Thermal resistance, junction to case	R_{thJC}	per diode				0.870	K/W
Thermal resistance, case to heatsink	R_{thCH}	per diode, λ_{grease}= 1 W/(m*K)			0.171		K/W

Table 8 Characteristic values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Temperature under switching conditions	$T_{vj, op}$		-40		150	°C

5 IGBT-Chopper

Table 9 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	V_{CES}		T_{vj} = 25 °C	1200	V
Continous DC collector current	I_{CDC}	$T_{vj\,max}$ = 175 °C	T_C = 115 °C	25	A
Repetitive peak collector current	I_{CRM}	t_P = 1 ms		50	A
Gate-emitter peak voltage	V_{GES}			±20	V

Table 10 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Collector-emitter saturation voltage	$V_{CE\,sat}$	I_C = 25 A, V_{GE} = 15 V	T_{vj} = 25 °C		1.60	TBD	V
			T_{vj} = 125 °C		1.74		
			T_{vj} = 175 °C		1.82		
Gate threshold voltage	V_{GEth}	I_C = 0.525 mA, V_{CE} = V_{GE}, T_{vj} = 25 °C		5.15	5.80	6.45	V
Gate charge	Q_G	V_{GE} = ±15 V, V_{CE} = 600 V			0.395		µC
Internal gate resistor	R_{Gint}	T_{vj} = 25 °C			0		Ω
Input capacitance	C_{ies}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			4.77		nF
Reverse transfer capacitance	C_{res}	f = 100 kHz, T_{vj} = 25 °C, V_{CE} = 25 V, V_{GE} = 0 V			0.017		nF
Collector-emitter cut-off current	I_{CES}	V_{CE} = 1200 V, V_{GE} = 0 V	T_{vj} = 25 °C			0.004	mA
Gate-emitter leakage current	I_{GES}	V_{CE} = 0 V, V_{GE} = 20 V, T_{vj} = 25 °C				100	nA
Turn-on delay time (inductive load)	t_{don}	I_C = 25 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Gon} = 9.1 Ω	T_{vj} = 25 °C		0.041		µs
			T_{vj} = 125 °C		0.043		
			T_{vj} = 175 °C		0.044		
Rise time (inductive load)	t_r	I_C = 25 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Gon} = 9.1 Ω	T_{vj} = 25 °C		0.023		µs
			T_{vj} = 125 °C		0.027		
			T_{vj} = 175 °C		0.029		

Table 10 Characteristic values (continued)

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Turn-off delay time (inductive load)	t_{doff}	I_C = 25 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Goff} = 9.1 Ω	T_{vj} = 25 °C		0.250		µs
			T_{vj} = 125 °C		0.330		
			T_{vj} = 175 °C		0.360		
Fall time (inductive load)	t_f	I_C = 25 A, V_{CE} = 600 V, V_{GE} = ±15 V, R_{Goff} = 9.1 Ω	T_{vj} = 25 °C		0.120		µs
			T_{vj} = 125 °C		0.210		
			T_{vj} = 175 °C		0.270		
Turn-on energy loss per pulse	E_{on}	I_C = 25 A, V_{CE} = 600 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Gon} = 9.1 Ω, di/dt = 795 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		1.19		mJ
			T_{vj} = 125 °C		1.56		
			T_{vj} = 175 °C		1.75		
Turn-off energy loss per pulse	E_{off}	I_C = 25 A, V_{CE} = 600 V, L_σ = 35 nH, V_{GE} = ±15 V, R_{Goff} = 9.1 Ω, dv/dt = 3020 V/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		1.62		mJ
			T_{vj} = 125 °C		2.59		
			T_{vj} = 175 °C		3.2		
SC data	I_{SC}	$V_{GE} \leq$ 15 V, V_{CC} = 800 V, $V_{CEmax}=V_{CES}-L_{sCE}*di/dt$	$t_P \leq$ 8 µs, T_{vj} = 150 °C		80		A
			$t_P \leq$ 7 µs, T_{vj} = 175 °C		75		
Thermal resistance, junction to case	R_{thJC}	per IGBT				0.967	K/W
Thermal resistance, case to heatsink	R_{thCH}	per IGBT, λ_{grease}= 1 W/(m*K)			0.171		K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		175	°C

Note: $T_{vj\,op}$ > 150°C is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

6 Diode, Chopper

Table 11 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Repetitive peak reverse voltage	V_{RRM}		T_{vj} = 25 °C	1200	V
Continous DC forward current	I_F			10	A
Repetitive peak forward current	I_{FRM}	t_P = 1 ms		20	A

Table 11 Maximum rated values (continued)

Parameter	Symbol	Note or test condition		Values	Unit
I^2t - value	I^2t	t_P = 10 ms, V_R = 0 V	T_{vj} = 125 °C	30	A^2s
			T_{vj} = 175 °C	25	

Table 12 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Forward voltage	V_F	I_F = 10 A, V_{GE} = 0 V	T_{vj} = 25 °C		1.72	TBD	V
			T_{vj} = 125 °C		1.59		
			T_{vj} = 175 °C		1.52		
Peak reverse recovery current	I_{RM}	V_R = 600 V, I_F = 10 A, V_{GE} = -15 V, -di$_F$/dt = 250 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		10		A
			T_{vj} = 125 °C		14		
			T_{vj} = 175 °C		17		
Recovered charge	Q_r	V_R = 600 V, I_F = 10 A, V_{GE} = -15 V, -di$_F$/dt = 250 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		0.95		µC
			T_{vj} = 125 °C		1.85		
			T_{vj} = 175 °C		2.44		
Reverse recovery energy	E_{rec}	V_R = 600 V, I_F = 10 A, V_{GE} = -15 V, -di$_F$/dt = 250 A/µs (T_{vj} = 175 °C)	T_{vj} = 25 °C		0.39		mJ
			T_{vj} = 125 °C		0.83		
			T_{vj} = 175 °C		1.09		
Thermal resistance, junction to case	R_{thJC}	per diode				1.81	K/W
Thermal resistance, case to heatsink	R_{thCH}	per diode, λ_{grease}= 1 W/(m*K)			0.181		K/W
Temperature under switching conditions	$T_{vj\,op}$			-40		175	°C

Note: $T_{vj\,op}$ > 150°C is allowed for operation at overload conditions. For detailed specifications, please refer to AN 2018-14.

7 NTC-Thermistor

Table 13 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Rated resistance	R_{25}	T_{NTC} = 25 °C		5		kΩ
Deviation of R_{100}	$\Delta R/R$	T_{NTC} = 100 °C, R_{100} = 493 Ω	-5		5	%
Power dissipation	P_{25}	T_{NTC} = 25 °C			20	mW

Table 13 Characteristic values (continued)

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
B-value	$B_{25/50}$	$R_2 = R_{25} \exp[B_{25/50}(1/T_2-1/(298{,}15\ K))]$		3375		K
B-value	$B_{25/80}$	$R_2 = R_{25} \exp[B_{25/80}(1/T_2-1/(298{,}15\ K))]$		3411		K
B-value	$B_{25/100}$	$R_2 = R_{25} \exp[B_{25/100}(1/T_2-1/(298{,}15\ K))]$		3433		K

Note: Specification according to the valid application note.

8 Characteristics diagrams

output characteristic (typical), IGBT, Inverter

$I_C = f(V_{CE})$

$V_{GE} = 15$ V

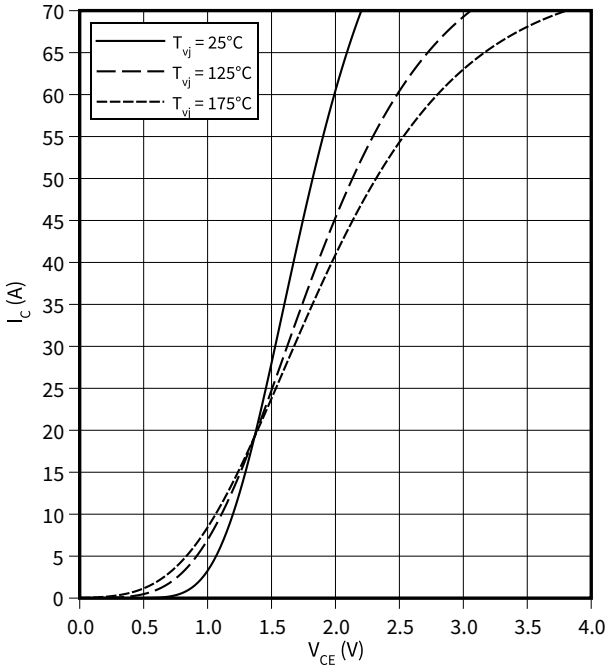

output characteristic (typical), IGBT, Inverter

$I_C = f(V_{CE})$

$T_{vj} = 175$ °C

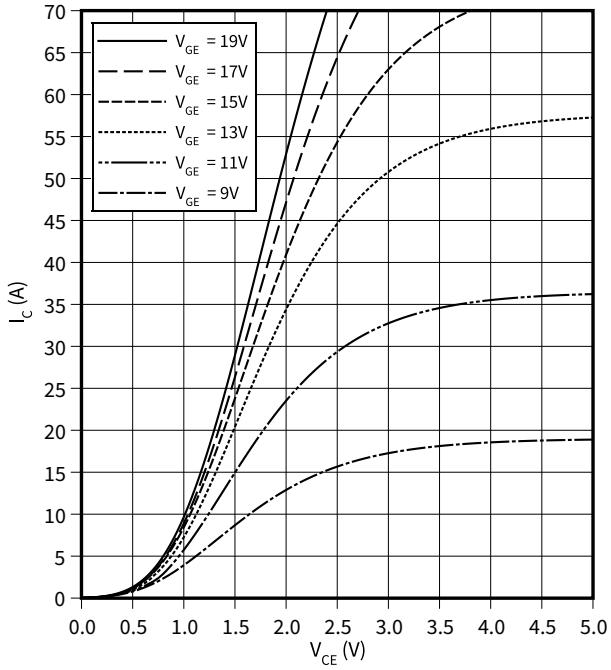

transfer characteristic (typical), IGBT, Inverter

$I_C = f(V_{GE})$

$V_{CE} = 20$ V

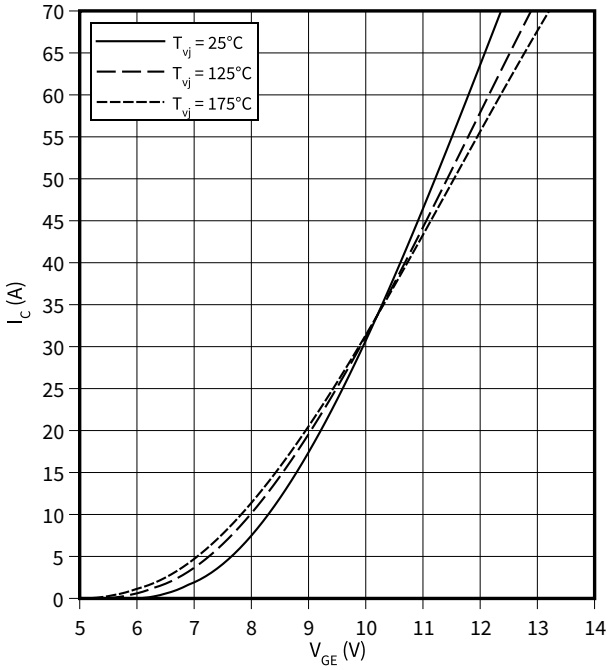

switching losses (typical), IGBT, Inverter

$E = f(I_C)$

$R_{Goff} = 8.2\ \Omega$, $R_{Gon} = 8.2\ \Omega$, $V_{CE} = 600$ V, $V_{GE} = \pm 15$ V

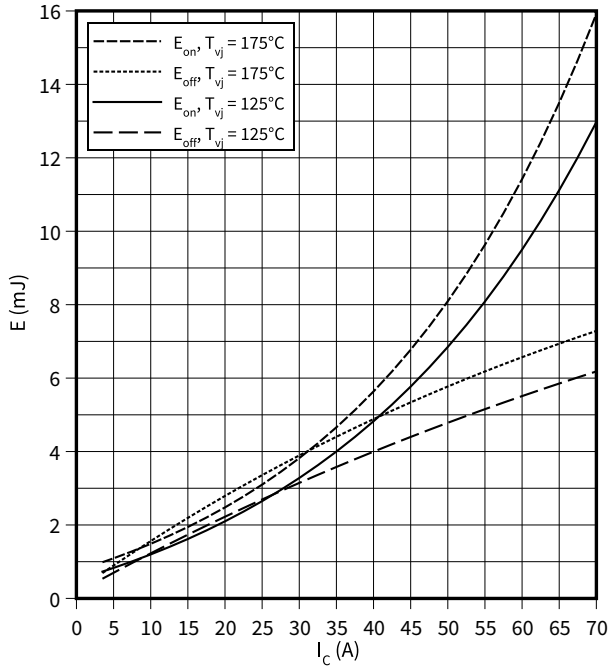

switching losses (typical), IGBT, Inverter

$E = f(R_G)$

$I_C = 35\ A$, $V_{CE} = 600\ V$, $V_{GE} = \pm 15\ V$

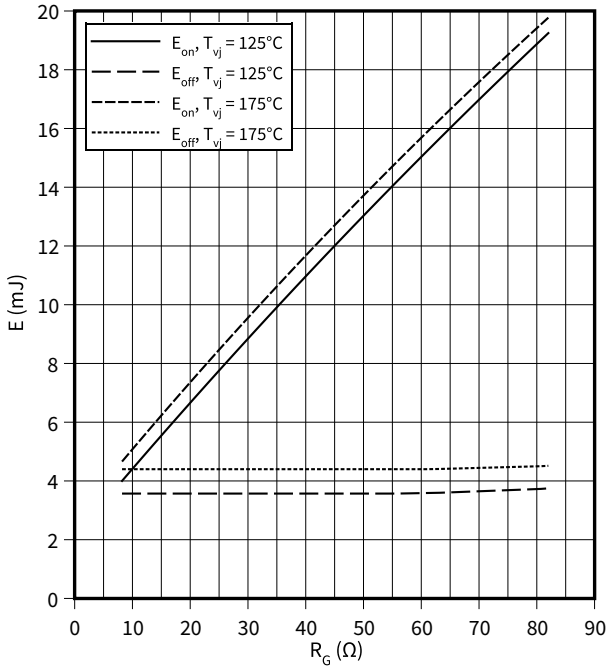

switching times (typical), IGBT, Inverter

$t = f(I_C)$

$R_{Goff} = 8.2\ \Omega$, $R_{Gon} = 8.2\ \Omega$, $V_{CE} = 600\ V$, $V_{GE} = \pm 15\ V$, $T_{vj} = 175\ °C$

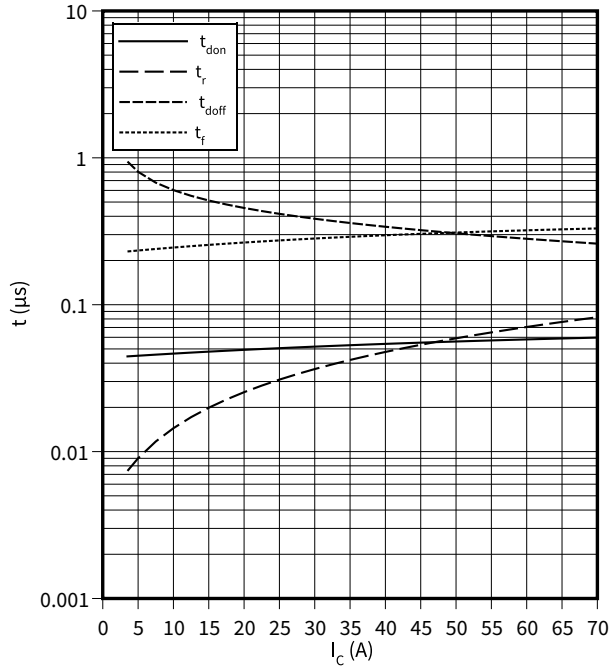

switching times (typical), IGBT, Inverter

$t = f(R_G)$

$I_C = 35\ A$, $V_{CE} = 600\ V$, $V_{GE} = \pm 15\ V$, $T_{vj} = 175\ °C$

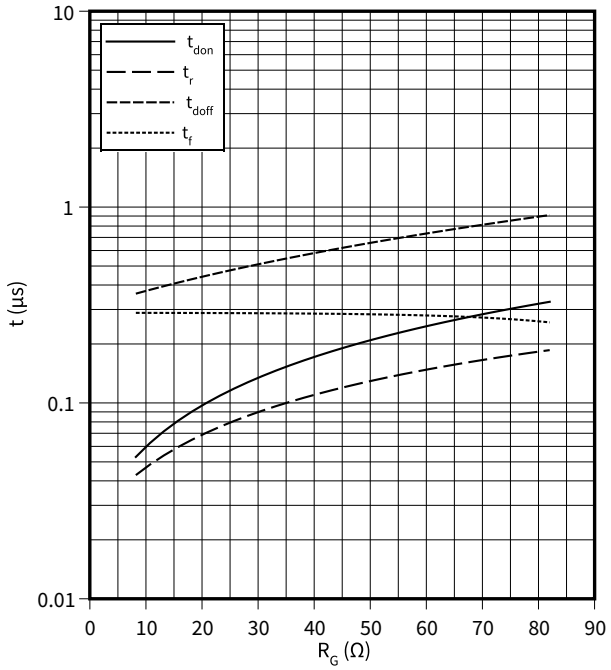

transient thermal impedance , IGBT, Inverter

$Z_{th} = f(t)$

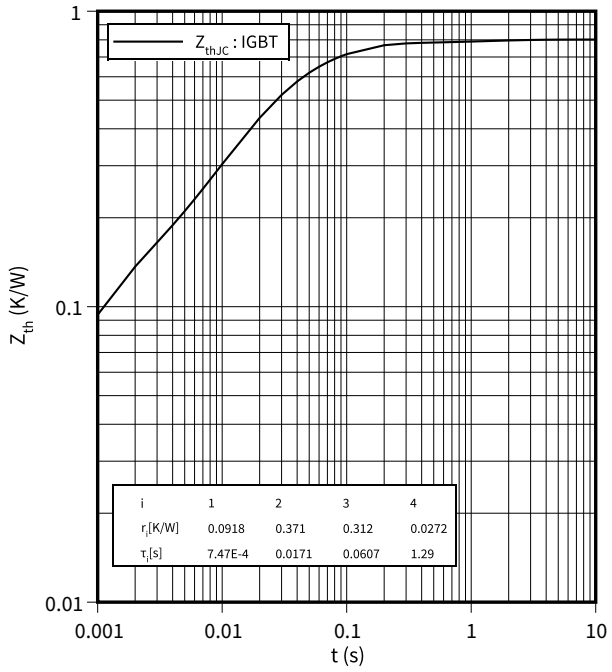

reverse bias safe operating area (RBSOA), IGBT, Inverter

$I_C = f(V_{CE})$

$R_{Goff} = 8.2\ \Omega$, $V_{GE} = \pm 15$ V, $T_{vj} = 175$ °C

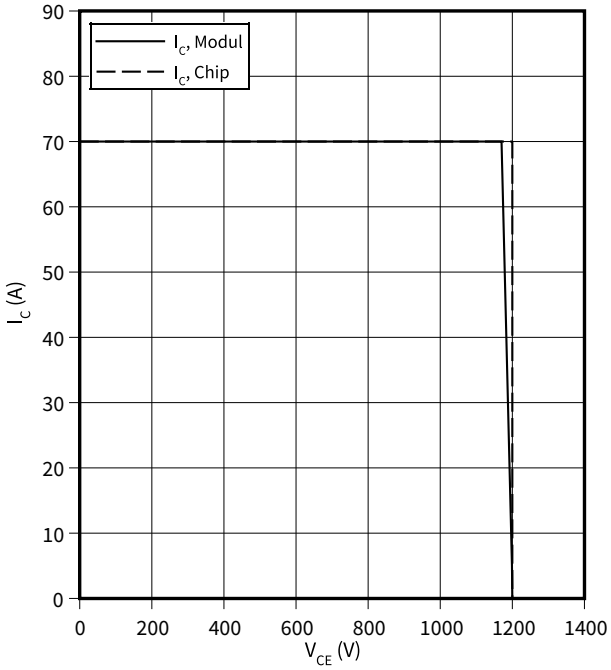

dv/dt (typical), IGBT, Inverter

$dv/dt = f(R_G)$

$I_C = 35$ A, $V_{CE} = 600$ V, $V_{GE} = \pm 15$ V, $T_{vj} = 25$ °C

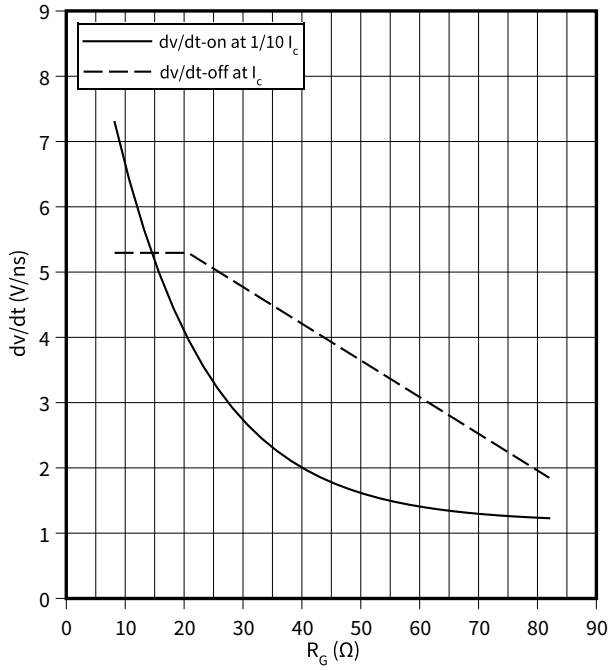

capacity characteristic (typical), IGBT, Inverter

$C = f(V_{CE})$

$f = 100$ kHz, $V_{GE} = 0$ V, $T_{vj} = 25$ °C

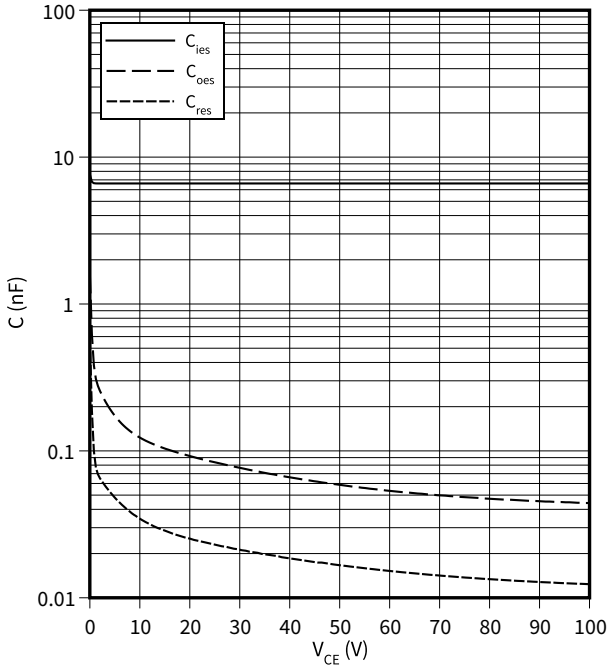

gate charge characteristic (typical), IGBT, Inverter

$V_{GE} = f(Q_G)$

$I_C = 35$ A, $T_{vj} = 25$ °C

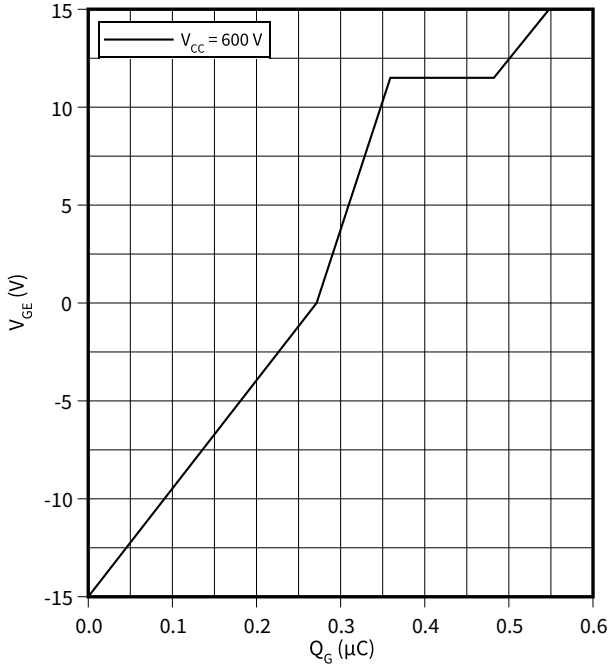

forward characteristic (typical), Diode, Inverter

$I_F = f(V_F)$

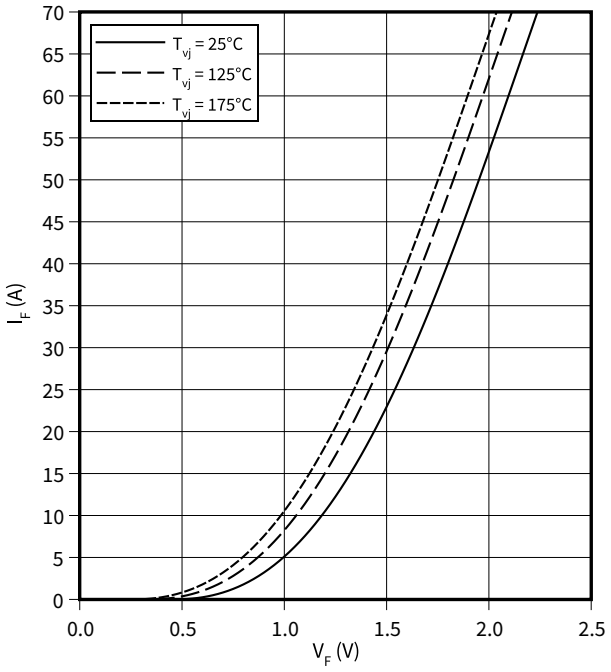

switching losses (typical), Diode, Inverter

$E_{rec} = f(I_F)$

$R_{Gon} = 8.2\ \Omega$, $V_{CE} = 600\ V$

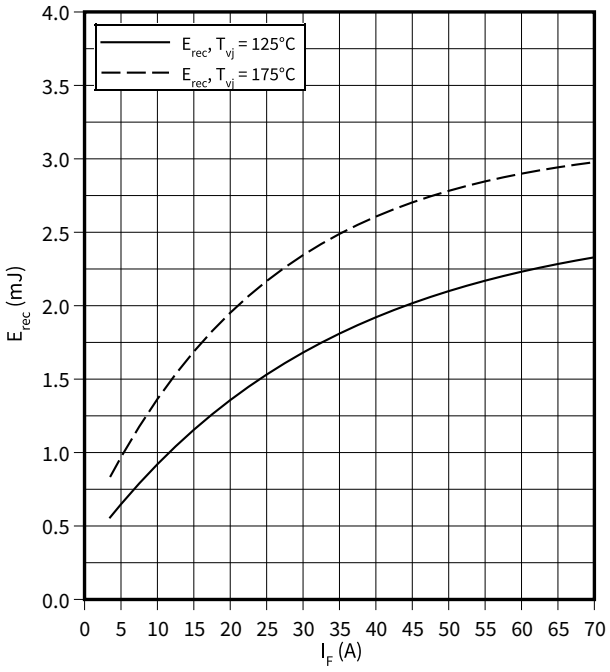

switching losses (typical), Diode, Inverter

$E_{rec} = f(R_G)$

$V_{CE} = 600\ V$, $I_F = 35\ A$

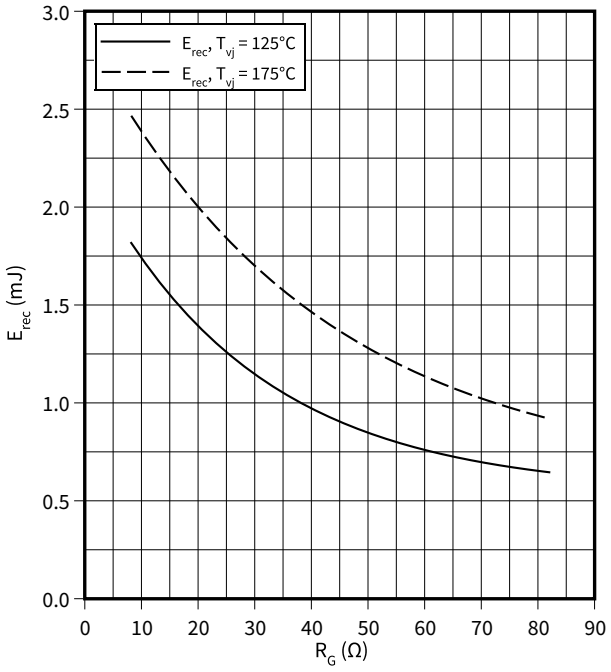

transient thermal impedance , Diode, Inverter

$Z_{th} = f(t)$

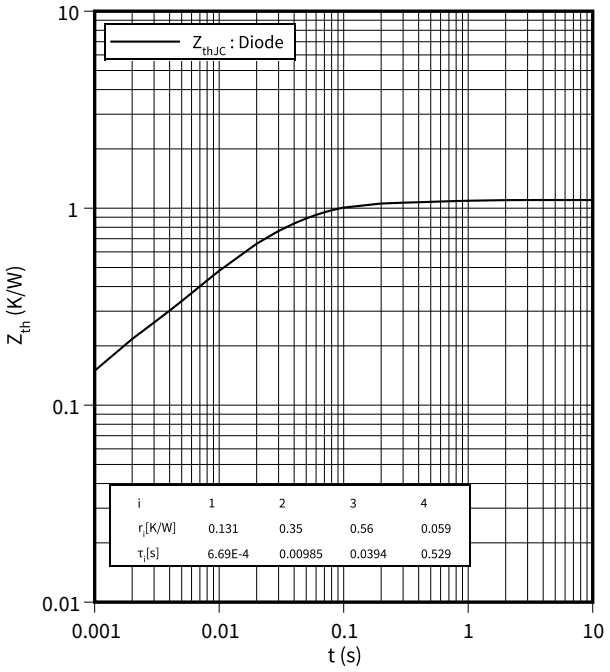

forward characteristic (typical), Diode, Rectifier

$I_F = f(V_F)$

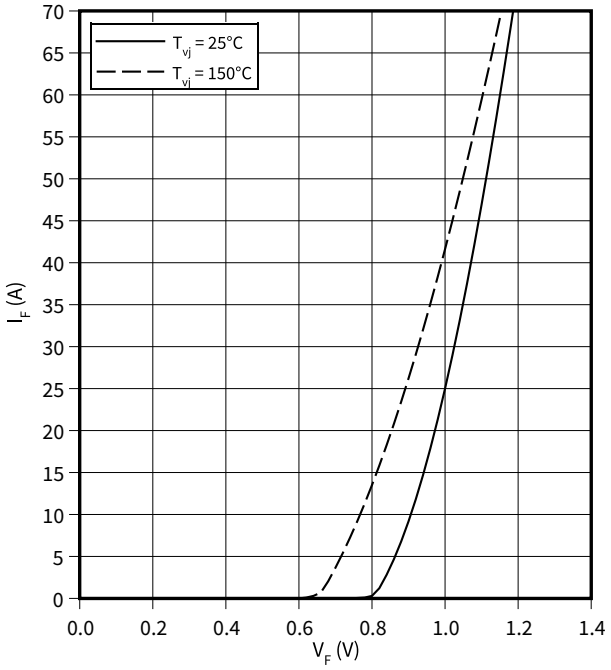

transient thermal impedance , Diode, Rectifier

$Z_{th} = f(t)$

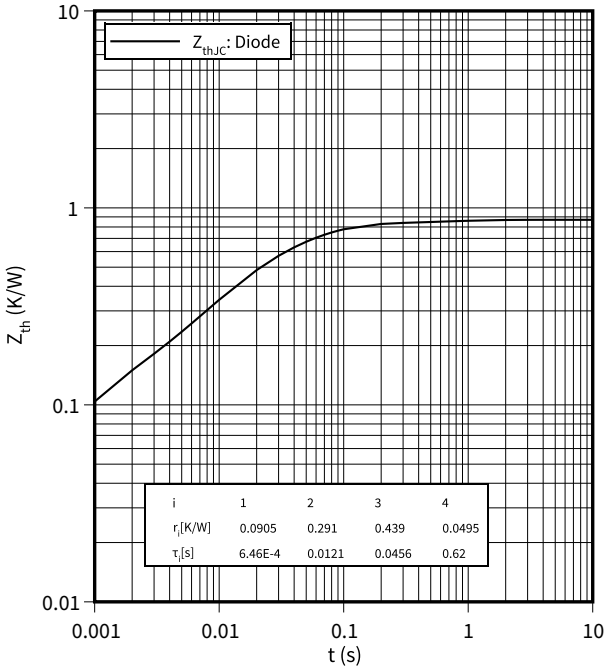

output characteristic (typical), IGBT-Chopper

$I_C = f(V_{CE})$

$V_{GE} = 15\ V$

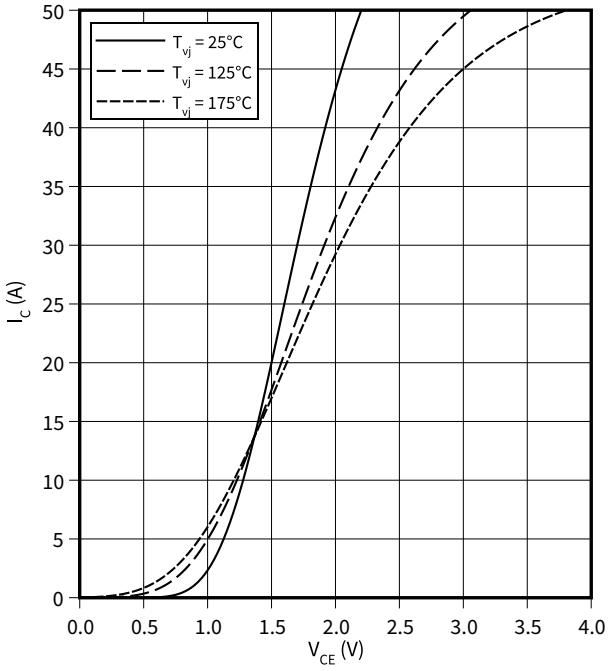

forward characteristic (typical), Diode, Chopper

$I_F = f(V_F)$

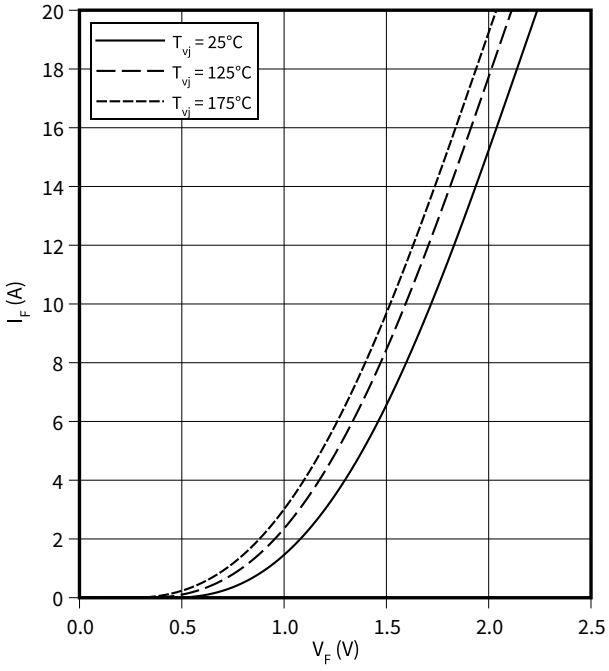

temperature characteristic (typical), NTC-Thermistor

$R = f(T_{NTC})$

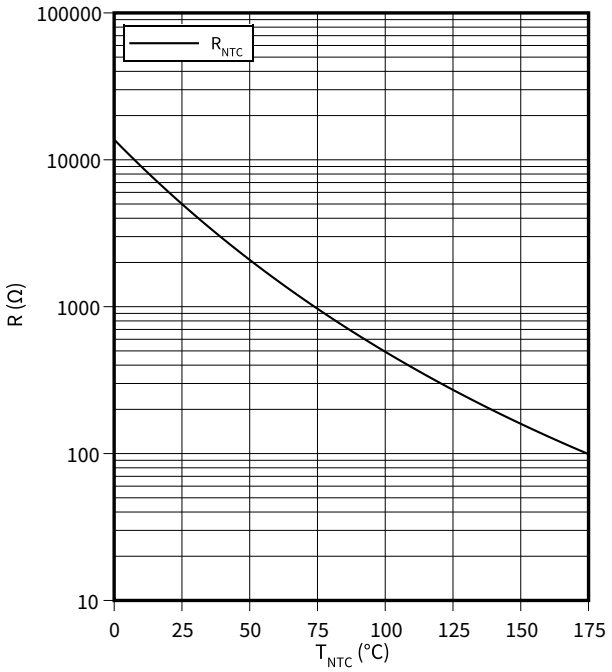

9 Circuit diagram

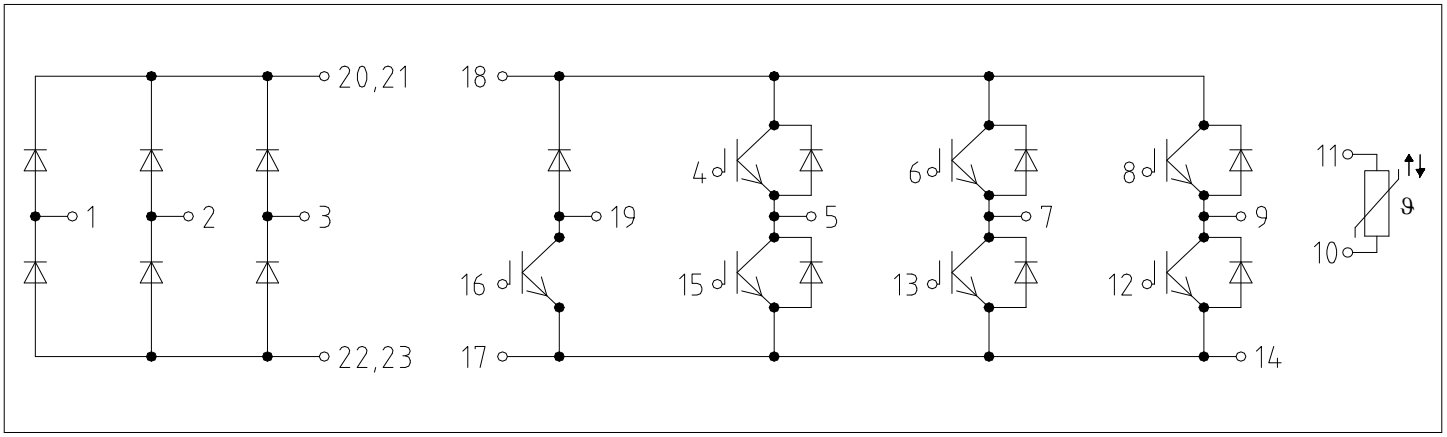

Figure 2

10 Package outlines

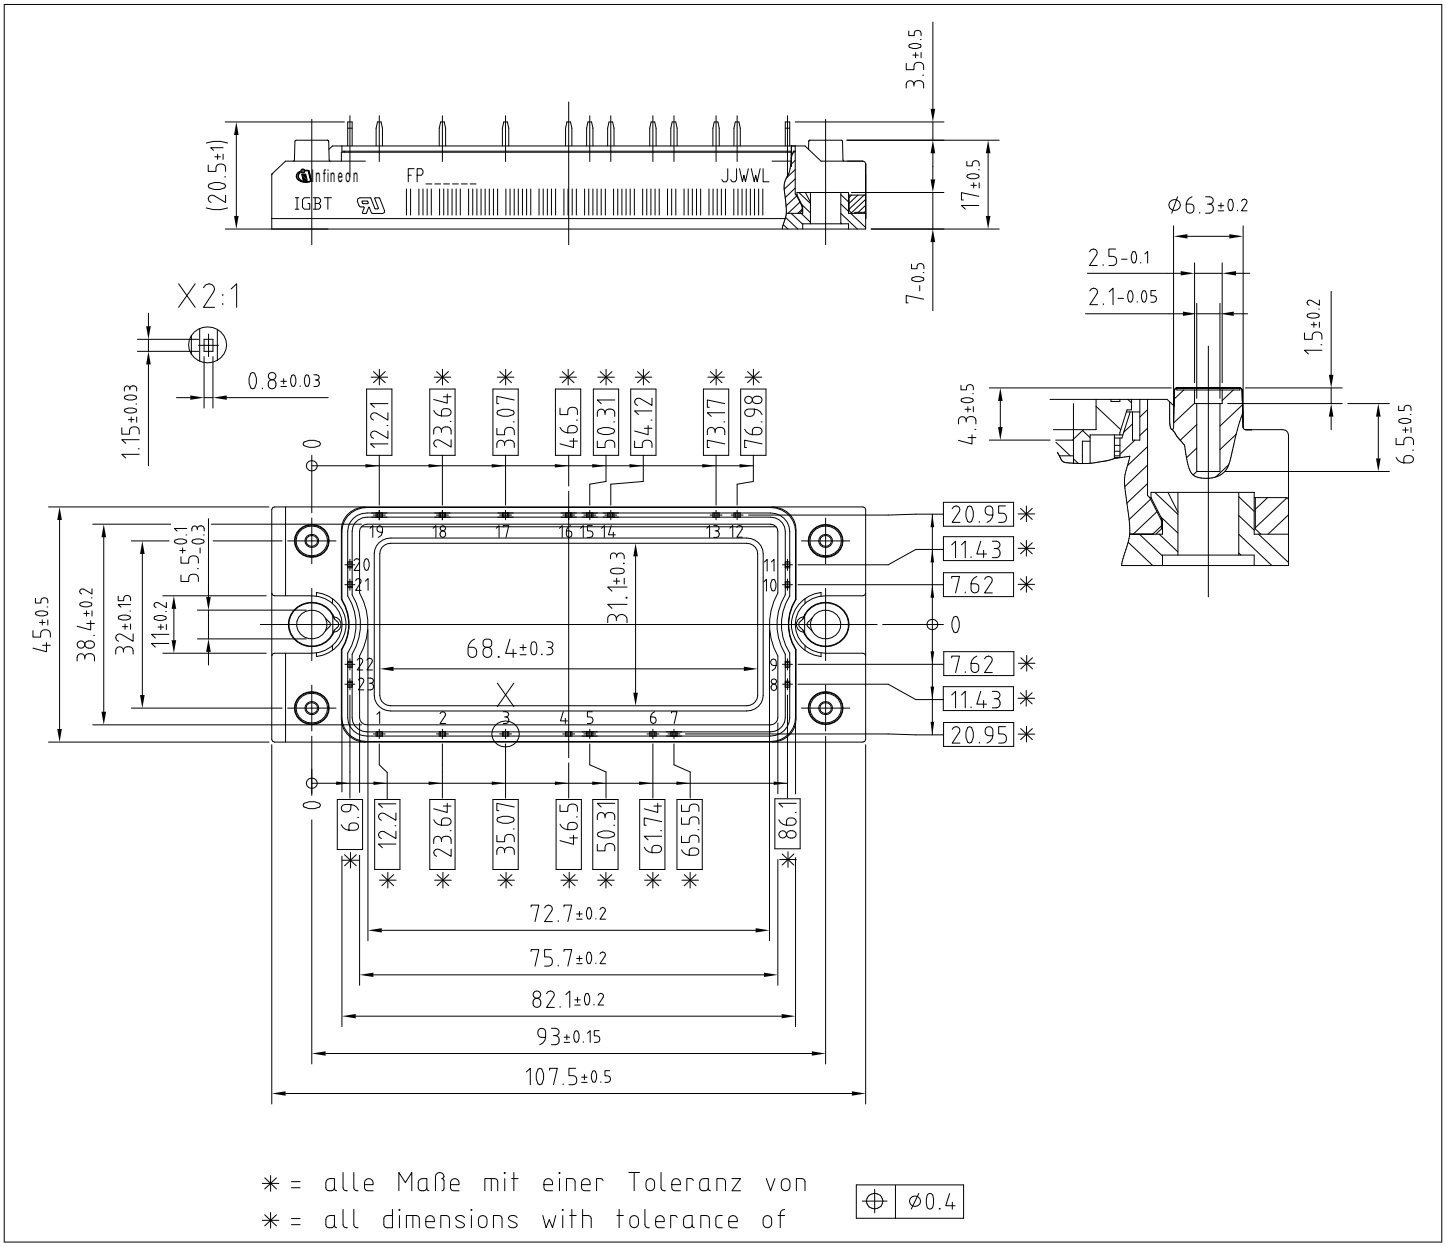

Figure 3

11 Module label code

Module label code			
Code format	Data Matrix		Barcode Code128
Encoding	ASCII text		Code Set A
Symbol size	16x16		23 digits
Standard	IEC24720 and IEC16022		IEC8859-1
Code content	*Content* Module serial number Module material number Production order number Date code (production year) Date code (production week)	*Digit* 1 – 5 6 - 11 12 - 19 20 – 21 22 – 23	*Example* 71549 142846 55054991 15 30
Example	71549142846550549911530		71549142846550549911530

Figure 4

Revision history

Document revision	Date of release	Description of changes
V1.0	2021-06-17	
0.20	2021-06-17	
0.20	2021-06-17	
0.30	2021-06-17	Preliminary datasheet

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-06-17

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2021 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-AAY118-003

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.