


MS20N85ICC0/T0/T1


Features

- Very low FOM $R_{DS(on)}$×Qg
- 100% avalanche tested
- Easy to use/drive
- RoHS compliant









Applications

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Power Factor Correction (PFC)
- Low Power Chargers and Adapters

Absolute Ratings (Tc=25℃, unless otherwise noted)

Parameter	Symbol		Value	Unit
Drain-Source Voltage	V_{DSS}		850	V
Transient Gate-Source Voltage	V_{GSM}		±30	V
Continuous Gate-Source Voltage	V_{GSS}		±20	V
Drain Current-continuous	I_D	T_C=25℃	20	A
		T_C=100℃	10	A
Drain Current-pulse (note 1)	I_{DM}		80	A
Single Pulsed Avalanche Energy (note 2)	E_{AS}		1125	mJ
Repetitive Avalanche Energy(note 2)	E_{AR}		27.8	mJ
Avalanche Current	I_{AR}		4.6	A
MOSFET dv/dt Ruggedness, VDS = 0...480V	dv/dt		50	V/ns
Continuous Diode Forward Current	I_S		20	A
Diode Pulsed Current(note 1)	$I_{S,pulse}$		69	A
Reverse Diode dv/dt(note 3)	dv/dt		15	V/ns
Maximum Diode Commutation Speed(note 3)	di/dt		500	A/μs
Power Dissipation (TO-247/TO-220)	PD		183	W
Power Dissipation (TO-220F)	PD		67	W

Operating and Storage Temperature Range	T_J,T_{STG}	-55~+150	℃

Electrical Characteristics(T_{CASE}=25℃ unless otherwise specified)

Parameter	Symbol	Tests conditions	Min	Typ	Max	Units
Drain-Source Voltage	BV_{DSS}	I_D=250μA,V_{GS}=0V	850	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=V_{DSS},V_{GS}=0V	-	-	1	μA
		V_{DS}=V_{DSS}, VGS=0V,T_C=150℃	-	-	100	μA
Gate body leakage current	I_{GSS}	V_{DS}=0V,V_{GS}=±20V	-	-	±100	nA
On-Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=250μA	2.5	-	4.5	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	V_{GS}=10V,I_D=4A	-	0.58	0.68	Ω
Gate Resistance	R_G	f = 1.0MHz open drain	-	5.96	-	Ω
Dynamic Characteristics						
Input capacitance	C_{iss}	V_{DS}=100V, V_{GS}=0V, f=250kHz	-	870.4	-	pF
Output capacitance	C_{oss}		-	28.65	-	pF
Reverse transfer capacitance	C_{rss}		-	0.80	-	pF

Electrical Characteristics(T_{CASE}=25℃ unless otherwise specified)

Parameter	Symbol	Tests conditions	Min	Typ	Max	Units
Switching-Characteristics						
Turn-On delay time	$t_{d(on)}$	V_{DD}=400V,I_D=20A, R_G=25Ω	-	68.45	-	ns
Turn-On rise time	t_r		-	76.9	-	ns
Turn-Off delay time	$t_{d(Off)}$		-	180.2	-	ns
Turn-Off rise time	t_f		-	58.35	-	ns
Total Gate Charge	Q_g	V_{DS}=640V,I_D=20A, V_{GS}=10V	-	54.9	-	nC
Gate-Source charge	Q_{gs}		-	10.4	-	nC

Gate-Drain charge	Q_{gd}		-	21.5	-	nC
Drain-Source Diode Characteristics and Maximum Ratings						
Source-Drain Voltage(Body Diode)	V_{SD}	T_C=25℃,I_S=10A	-	-	1.2	A
Reverse recovery time	t_{rr}	V_R=400,I_F=20A dI_F/dt=100A/μs	-	405.4	-	ns
Reverse recovery charge	Q_{rr}		-	4.633	-	μC
Peak Reverse Recovery Current	I_{rrm}		-	22.83	-	A

Thermal Characteristic

Parameter	Symbol	Value		Unit
		TO-247/ TO-220	TO-220F	
Thermal Resistance,junction to Case,Max	R_{th}(j-C)	0.68	1.84	℃/W
Thermal Resistance,junction to Ambient,Max	R_{th}(j-A)	62.5	62.5	℃/W

Notes:


1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. I_D = 10A, V_{DD} = 50V, R_G = 25Ω, Starting T_J = 25°C
3. Identical low side and high side switch with identical R_G

Order information


Order codes	Package	Packaging
MS20N85ICC0	TO-247	Tube
MS20N85ICT0	TO-220	Tube
MS20N85ICT1	TO-220F	Tube

Typical Characteristics


On-Region Characteristic@25℃

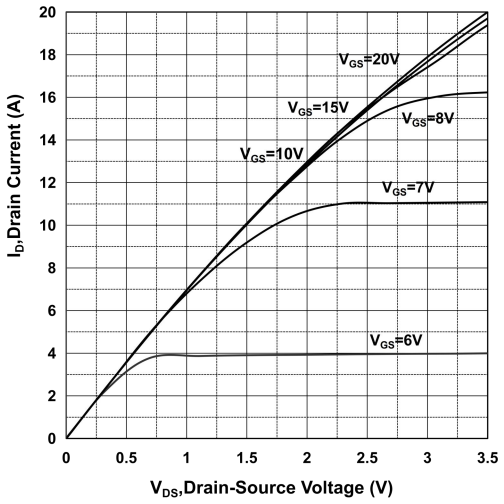


Extended On-Region Characheristic@25℃

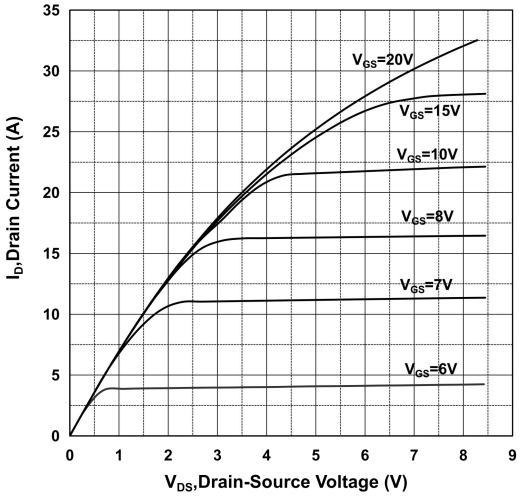


On-Region Characteristic@125℃

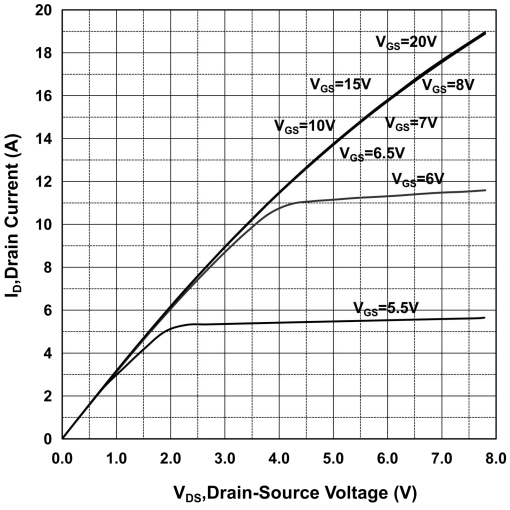


Normalized Transfer Characteristics

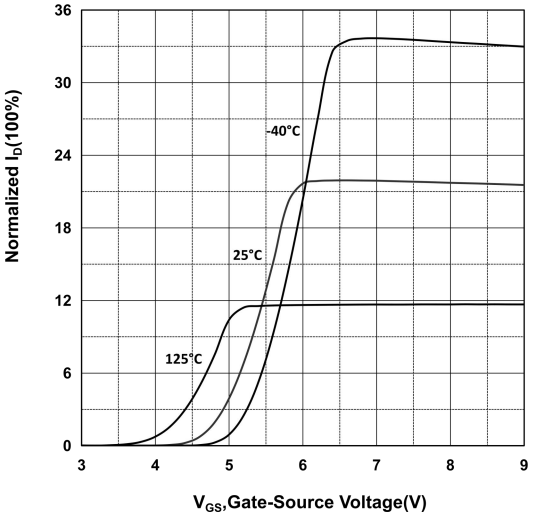


Transconductance

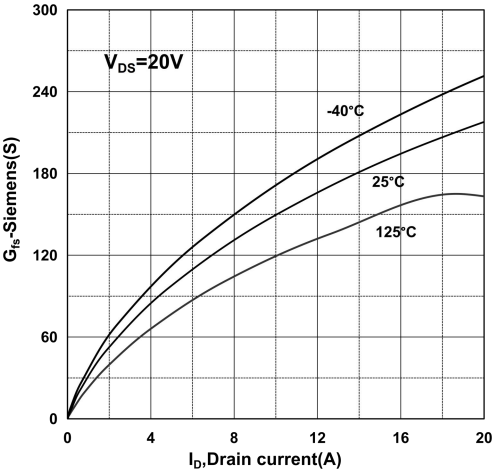


Normalized On-Resistance Variation vs Drain Current and Gate Voltage

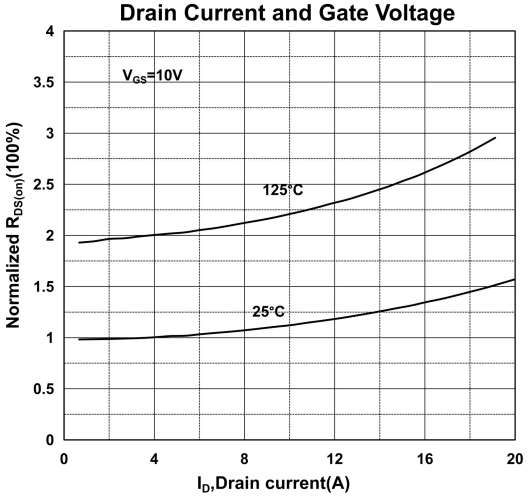


Normalized On-Resistance Variation vs Temperature

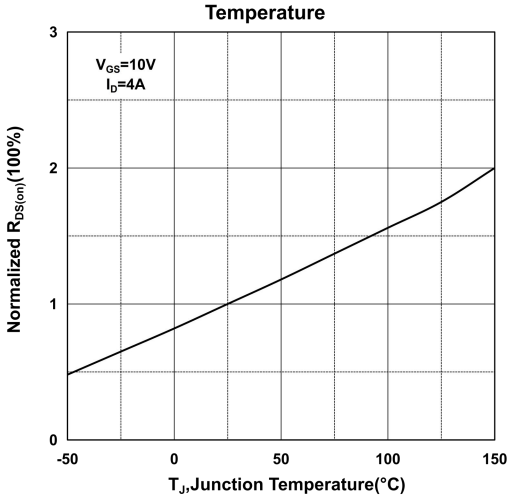


Body Diode Forward Voltage Variation with Sourse Current and Temperature

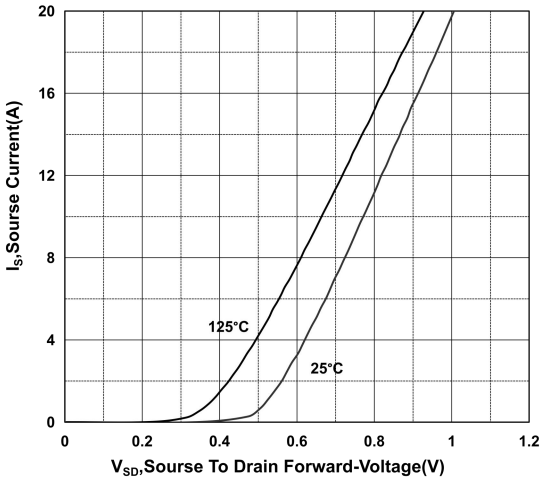


Capacitance

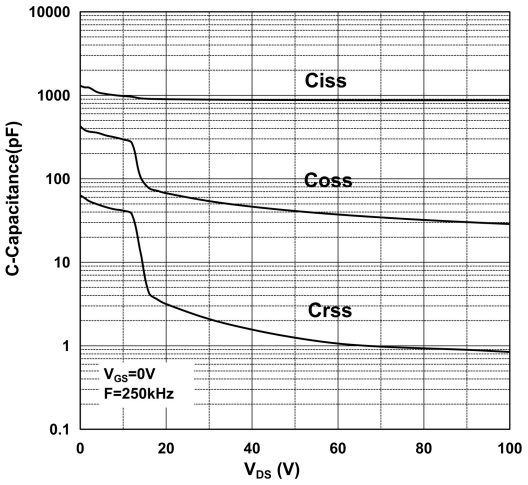


Gate Charge

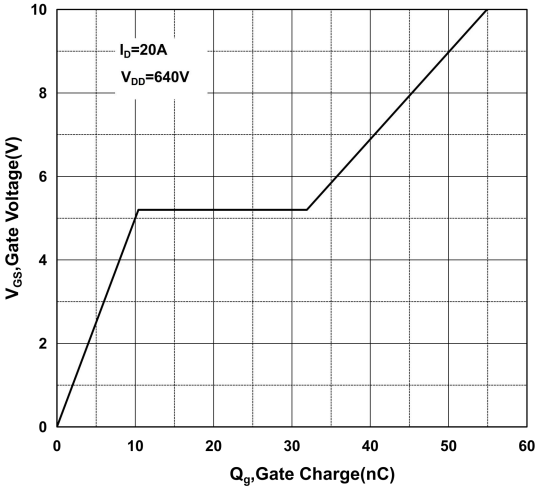


Normalized Maximum Drain Current vs Case Temperature

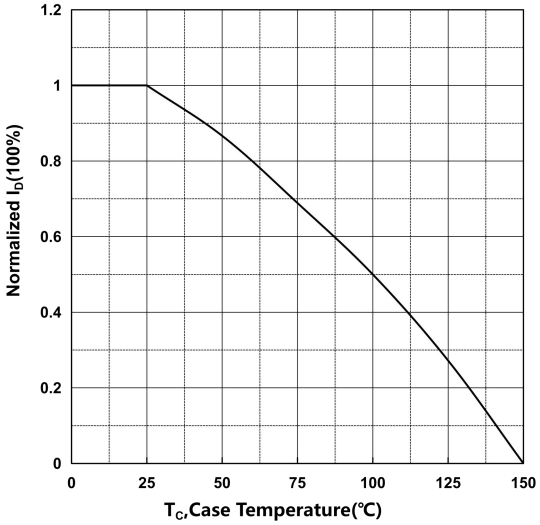


Normalized $V_{(BV)DS}$ vs temperature

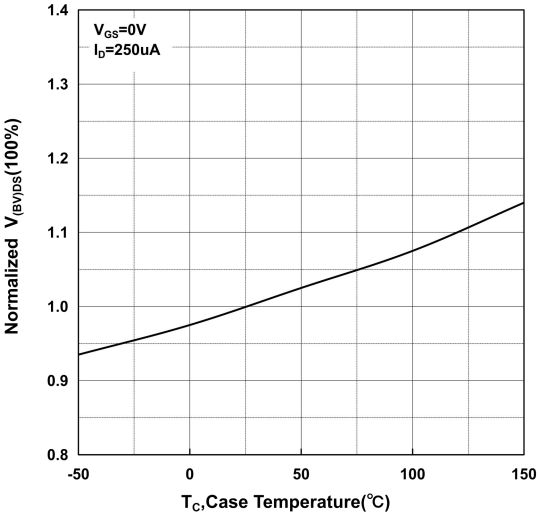


Normalized gate threshold voltage vs temperature

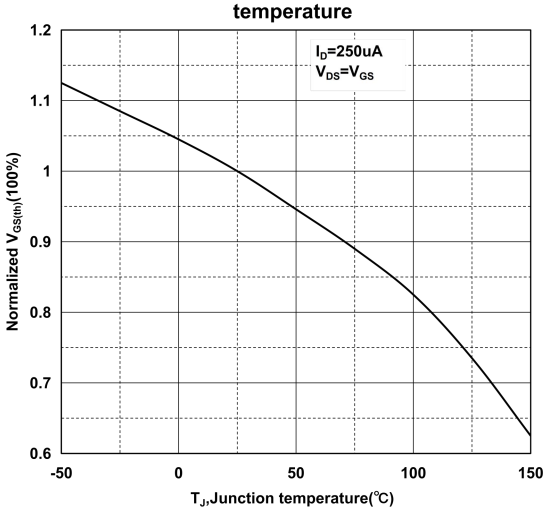


Normalized Maximum avalanche energy vs temperature

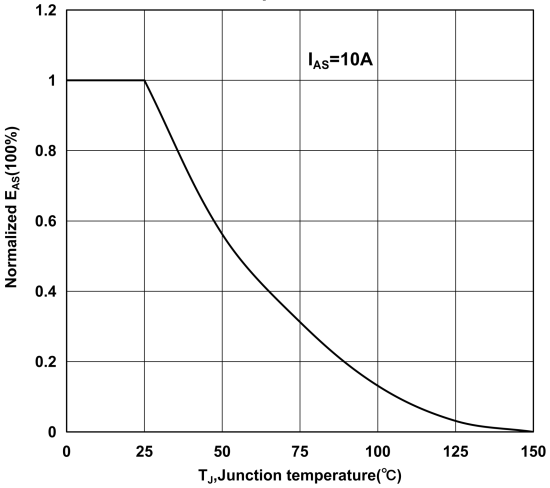


Transient Thermal Response Curve for TO-247/TO-220

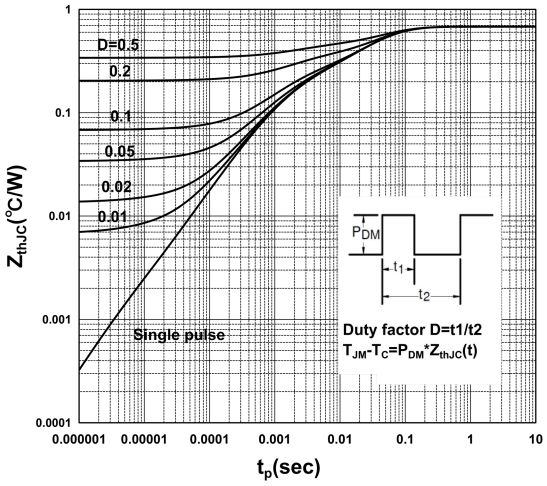


Safe Operating Area for TO-247/TO-220

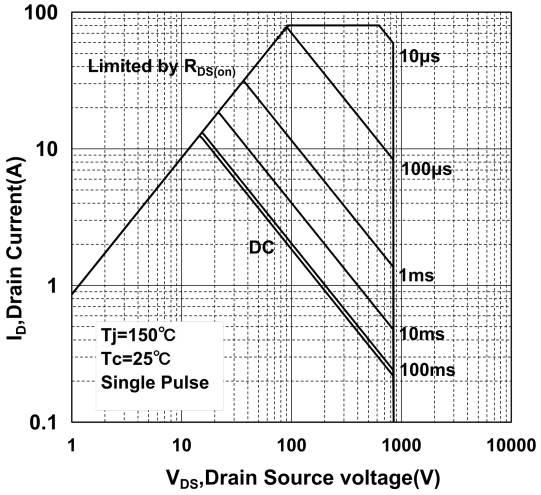

Transient Thermal Response Curve for TO-220F

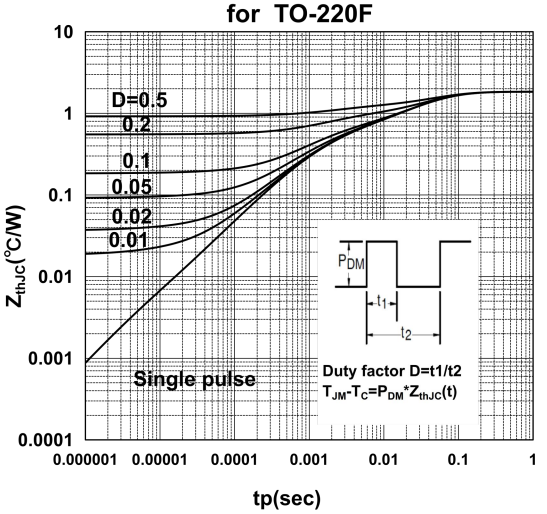


Safe Operating Area for TO-220F

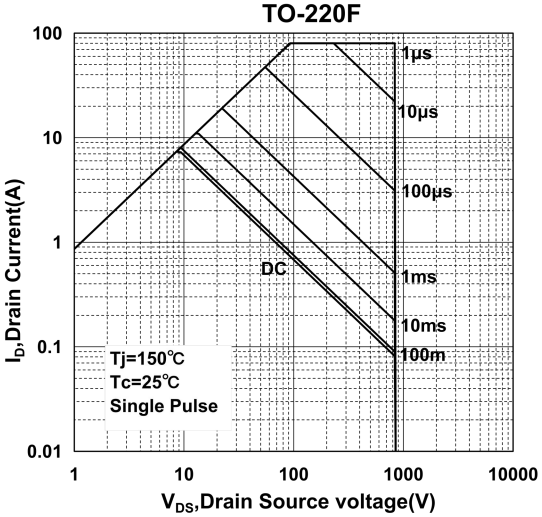


Test Circuit


Gate Charge Test Circuit and Waveform

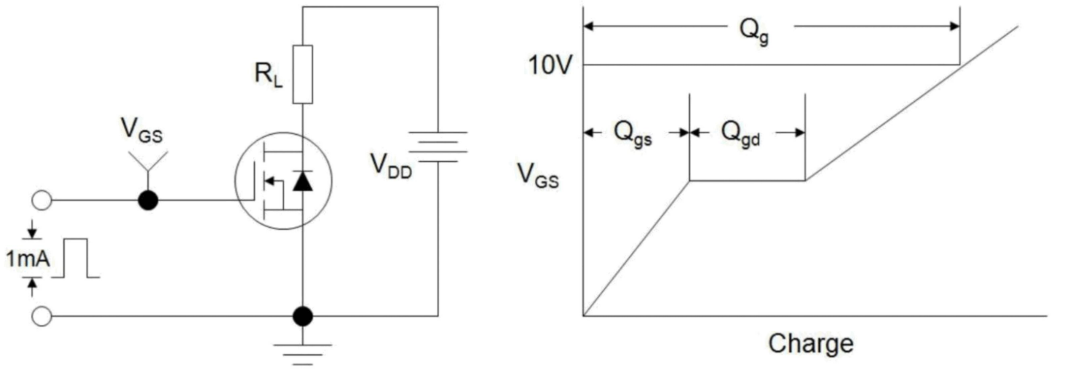


Resistive Switching Test Circuit and Waveform

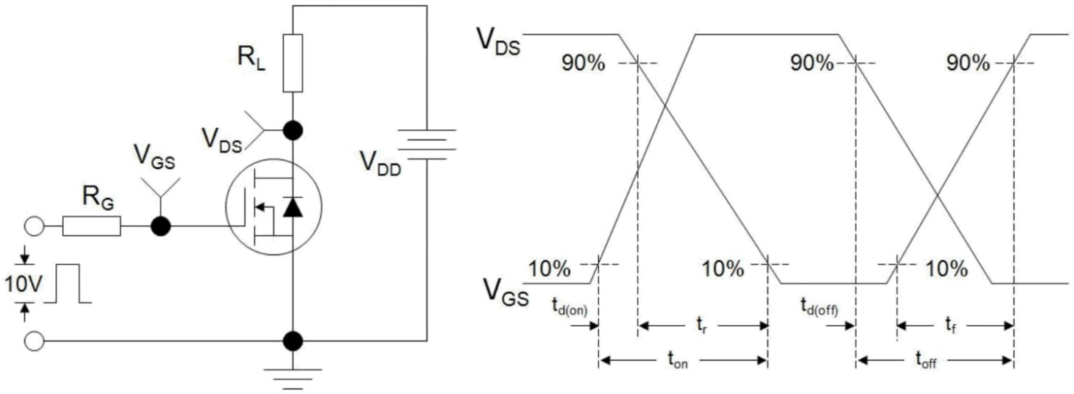


Unclamped Inductive Switching Test Circuit and Waveform

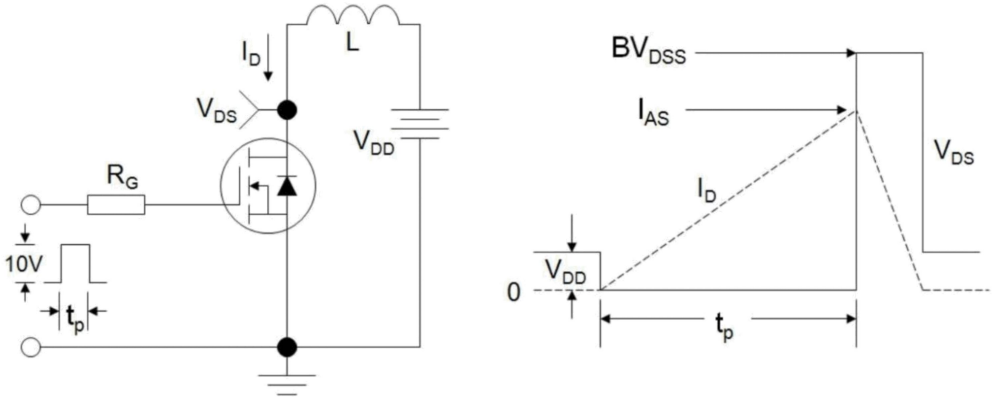


Package Mechanical DATA

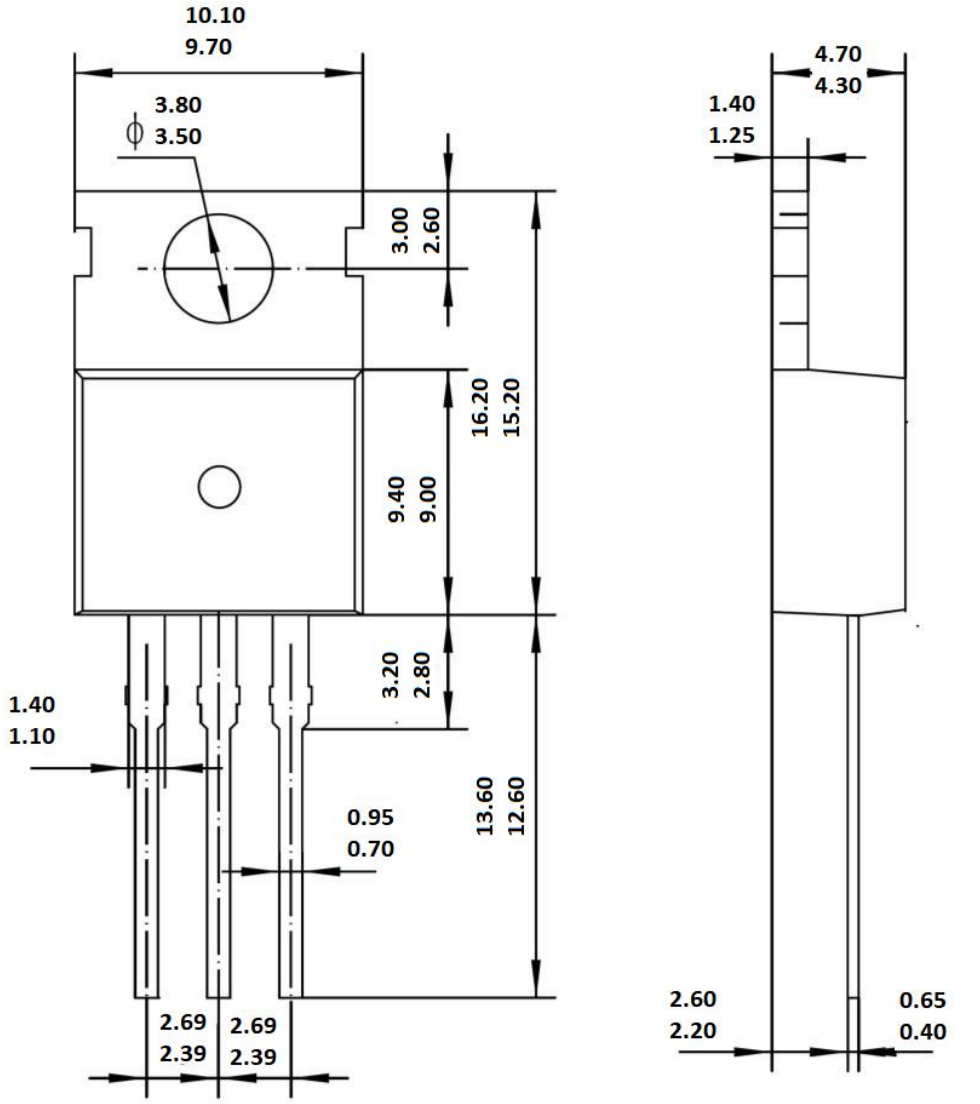




TO-220

Unit: mm

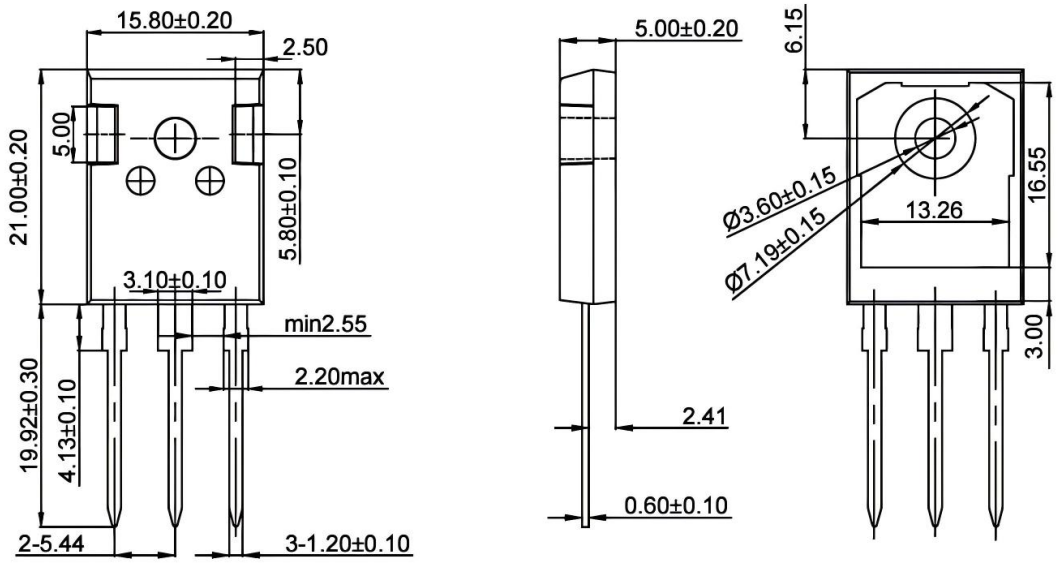

NOTES:1.surface roughness Ra =1.14±0.20um
2.Unmarked tolerance ±0.15
3.unit:mm

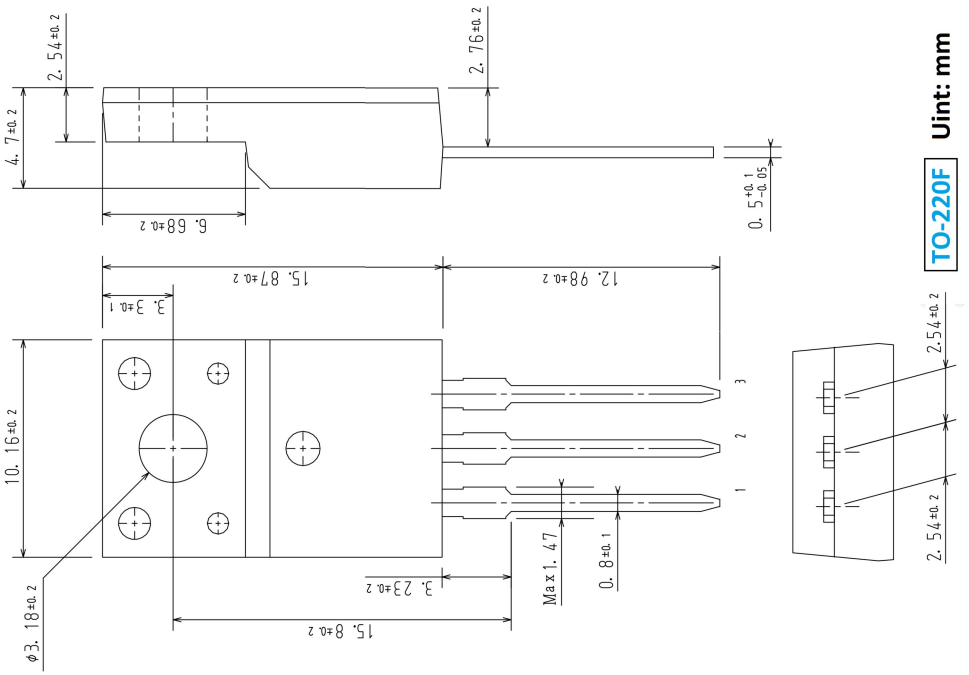

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.