S15N60CF

650V N-Channel Multi-EPI Super-JMOSFET

General Description

This Power MOSFET is produced using Slkor's Advanced Super-Junction technology.
This advanced technology has been especially tailored to minimize conduction loss, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.
These devices are well suited for AC/DC power conversion in switching mode operation for higher efficiency.

Features

- 15A, 650V, $R_{DS(on)max}$= 0.28Ω@V_{GS} = 10 V
- Low gate charge (typical 19.6nC)
- Lower Gate Resistance
- 100% Avalanche Tested
- Pb-free and RoHS Compliant





Absolute Maximum Ratings

T_C = 25°C unless otherwise noted

Symbol	Parameter		SL15N60CF	Units
V_{DSS}	Drain-Source Voltage		650	V
I_D	Drain Current - Continuous (T_C = 25℃)		15	A
	- Continuous (T_C = 100℃)		8	A
I_{DM}	Drain Current - Pulsed	(Note 1)	45	A
V_{GSS}	Gate-Source Voltage		±30	V
EAS	Single Pulsed Avalanche Energy	(Note 2)	710	mJ
I_{AR}	Avalanche Current	(Note 1)	3.0	A
E_{AR}	Repetitive Avalanche Energy		1.11	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	20	V/ns
	MOSFET dv/dt		100	
P_D	Power Dissipation (T_C = 25℃)		30	W
	- Derate above 25℃		0.24	W/℃
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to +150	℃
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds		300	℃

* Drain current limited by maximum junction temperature.

Thermal Characteristics

Symbol	Parameter	SL15N60CF	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	4.1	℃/W
$R_{\theta JS}$	Thermal Resistance, Case-to-Sink Typ.	--	℃/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	62.5	℃/W

Electrical Characteristics

T_C = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS} = 0 V, I_D = 250mA	650	--	--	V
		V_{GS} = 0 V, I_D = 0.25uA,T_J = 150℃	650	--	--	
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 600 V, V_{GS} = 0 V	--	--	1	uA
		V_{DS} = 480 V, T_C = 125℃	--	2	--	uA
I_{GSSF}	Gate-Body Leakage Current, Forward	V_{GS} = 30 V, V_{DS} = 0 V	--	--	100	nA
I_{GSSR}	Gate-Body Leakage Current, Reverse	V_{GS} = -30 V, V_{DS} = 0 V	--	--	-100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250uA	2.5	--	4.5	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	V_{GS} = 10 V, I_D = 7.5 A	--	238	280	mΩ
R_g	Gate resistance	F=1MHZ	--	1.1	--	Ω
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS} = 400 V, V_{GS} = 0V, f = 1MHz	--	780	--	pF
C_{oss}	Output Capacitance		--	23	--	pF
$C_{o(tr)}$	Time Related Output Capacitance	V_{DS} = 0V to 400 V, V_{GS} = 0 V		300		pF
$C_{o(er)}$	Energy Related Output Capacitance		--	37	--	pF
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{DS} = 400 V, I_D = 5.3A V_{GS} = 10 V, R_G = 10 Ω See Figure 13	--	7.6	--	ns
t_r	Turn-On Rise Time		--	6.7	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	38.2	--	ns
t_f	Turn-Off Fall Time		--	8.4	--	ns
Q_g	Total Gate Charge	V_{DS} =400 V, I_D = 5.3A, V_{GS} = 10 V	--	19.6	--	nC
Q_{gs}	Gate-Source Charge		--	3.7	--	nC
Q_{gd}	Gate-Drain Charge		--	9.7	--	nC
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain-Source Diode Forward Current		--	--	15	A
I_{SM}	Maximum Pulsed Drain-Source Diode Forward Current		--	--	45	A
V_{SD}	Drain-Source Diode Forward Voltage	V_{GS} = 0 V, I_S = 5.3A	--	--	1.2	V
t_{rr}	Reverse Recovery Time	V_{DD} = 400 V, I_S = 5.3A, dI_F / dt = 100 A/us	--	234	--	ns
Q_{rr}	Reverse Recovery Charge		--	2.2	--	uC

※Notes:

1. Repetitive rating: pulse-width limited by maximum junction temperature.
2. L=79mH,I_{AS} = 3 A, R_G = 25 Ω, starting T_J = 25℃.
3. I_{SD} ≤ 5.3 A, di/dt ≤ 100 A/μs, V_{DD} ≤ 400 V, starting T_J = 25℃.

Typical Characteristics

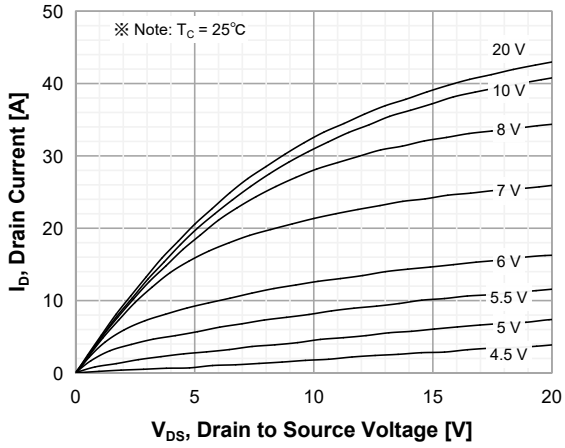

Figure 1. On-Region Characteristics

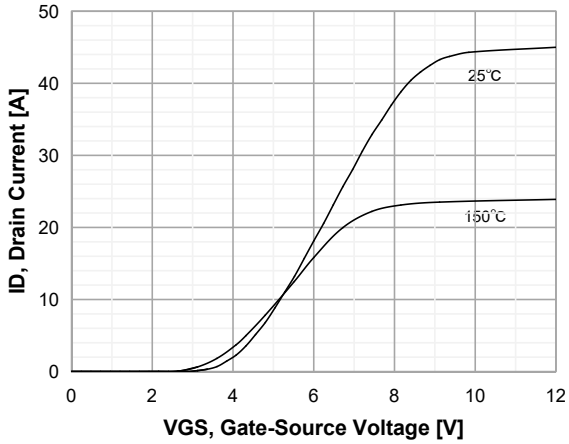

Figure 2. Transfer Characteristics

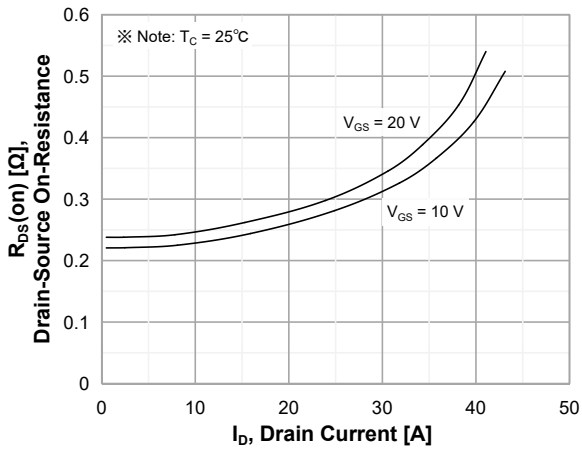

Figure 3. On-Resistance Variation vs Drain Current and Gate Voltage

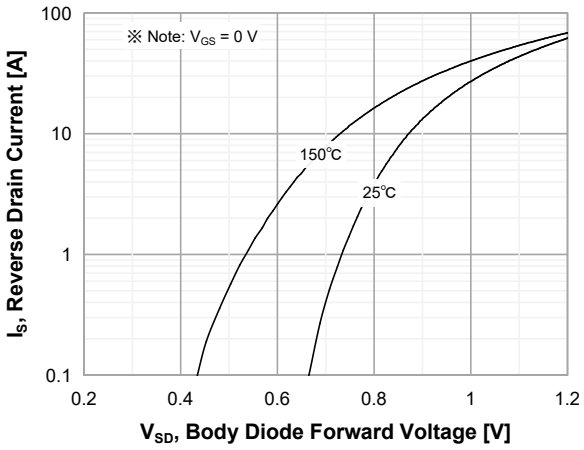

Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

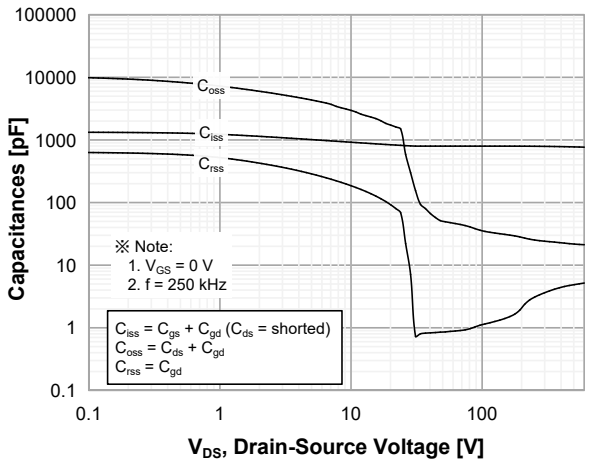

Figure 5. Capacitance Characteristics

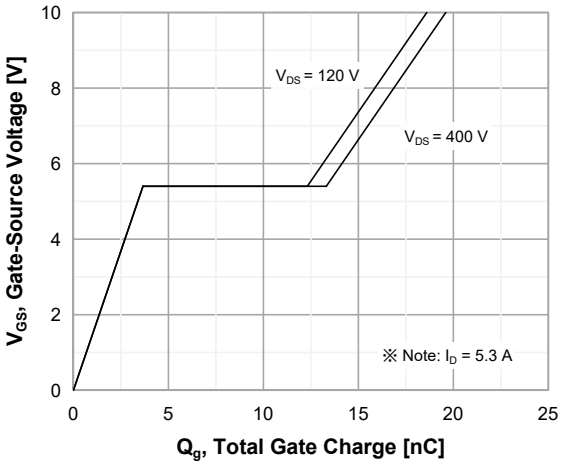

Figure 6. Gate Charge Characteristics

Typical Characteristics (Continued)

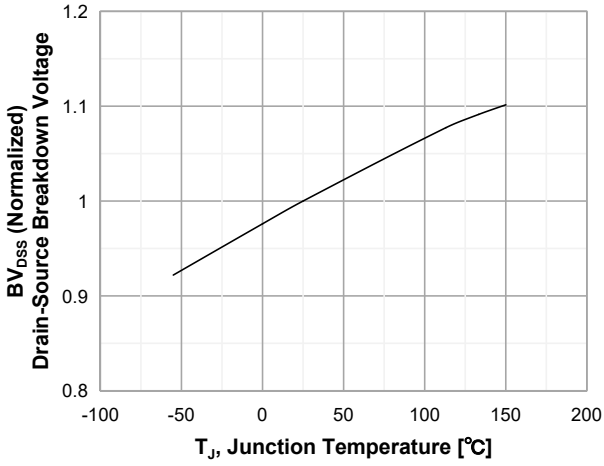

Figure 7. Breakdown Voltage Variation vs Temperature

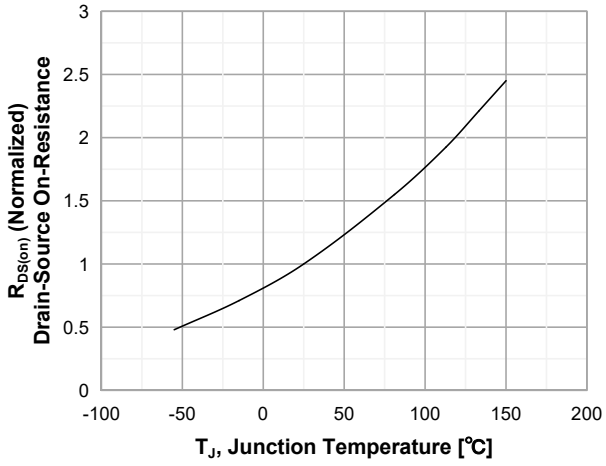

Figure 8. On-Resistance Variation vs Temperature

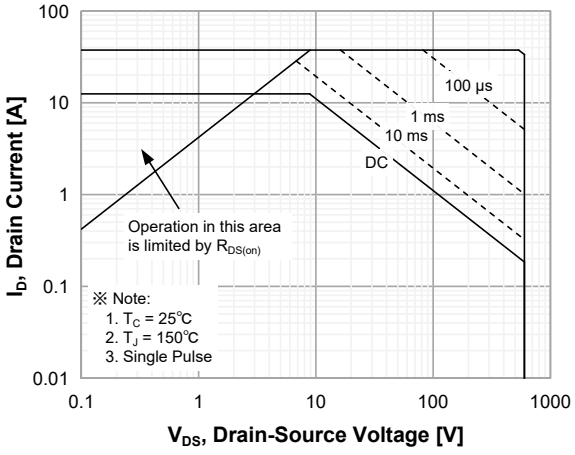

Figure 9. Maximum Safe Operating Area

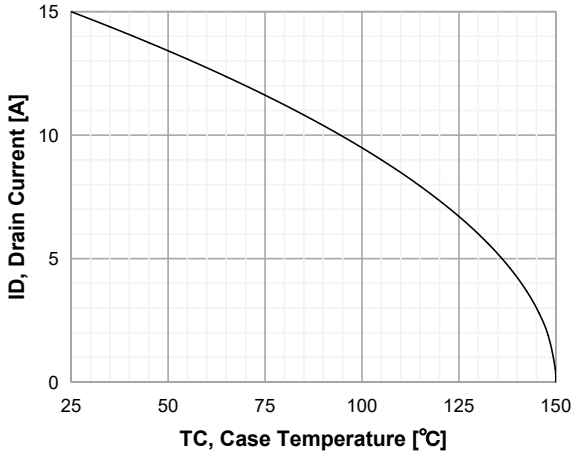

Figure 10. Maximum Drain Current vs Case Temperature

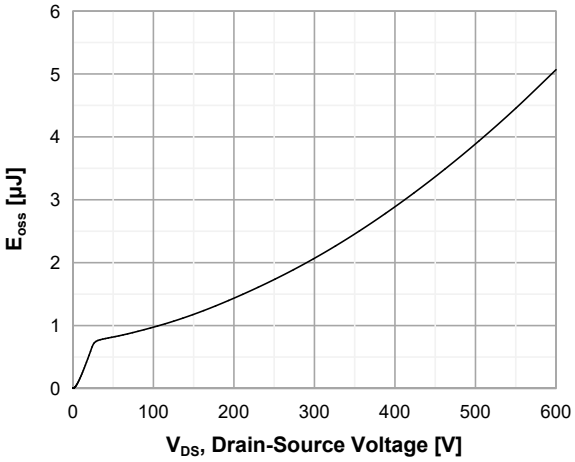

Figure 11. E_{oss} vs. Drain to Source Voltage

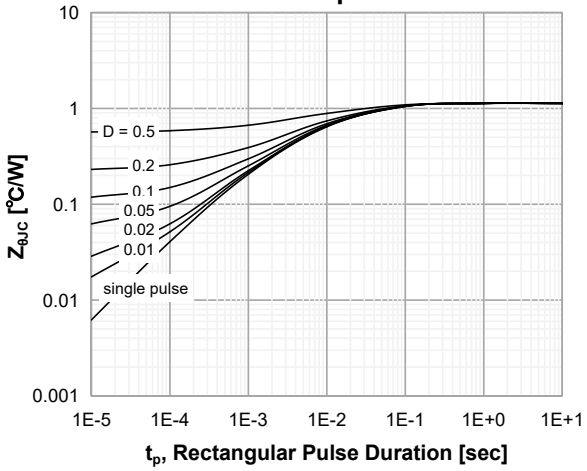

Figure 12. Transient Thermal Response Curve

Inductive Load Switching Test Circuit and Waveforms

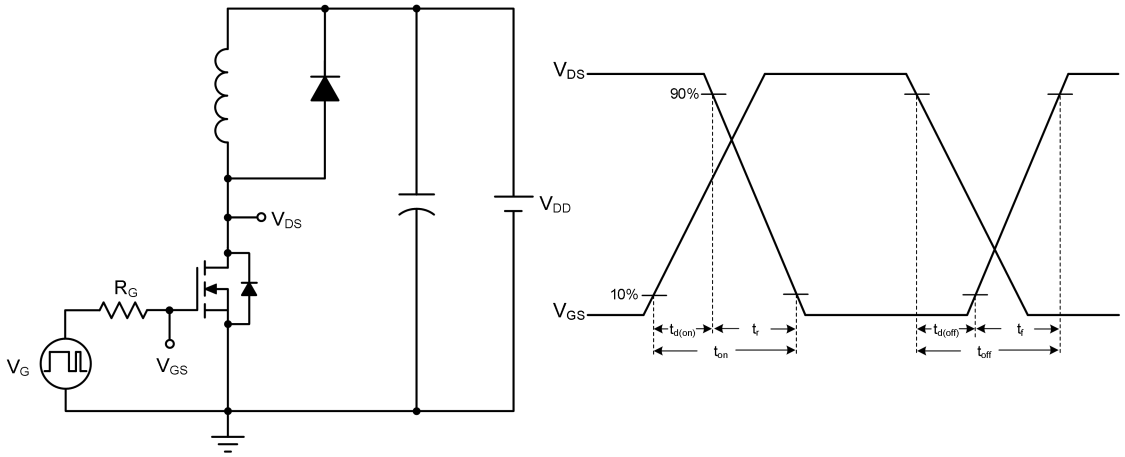

Unclamped Inductive Switching Test Circuit & Waveforms

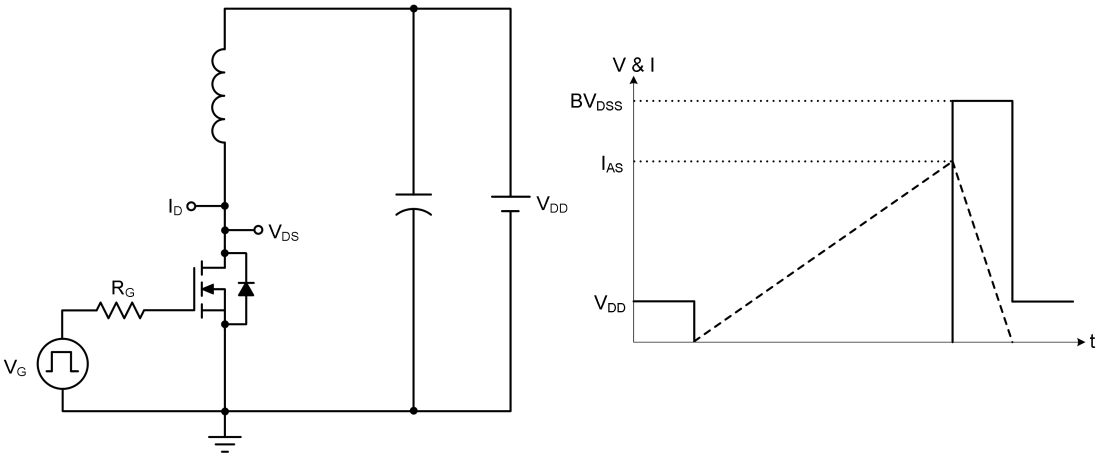

Peak Diode Recovery dv/dt Test Circuit and Waveforms

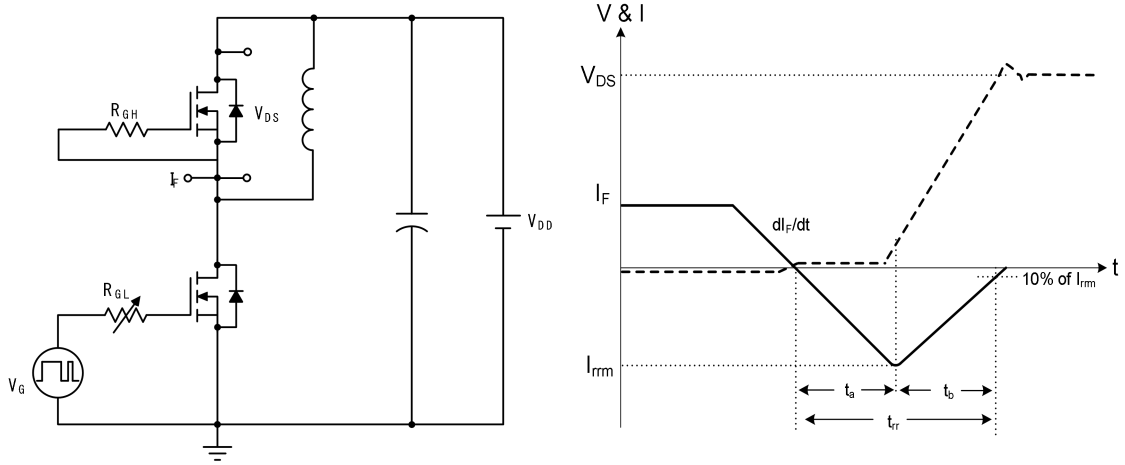

TO-220F OUTLINE

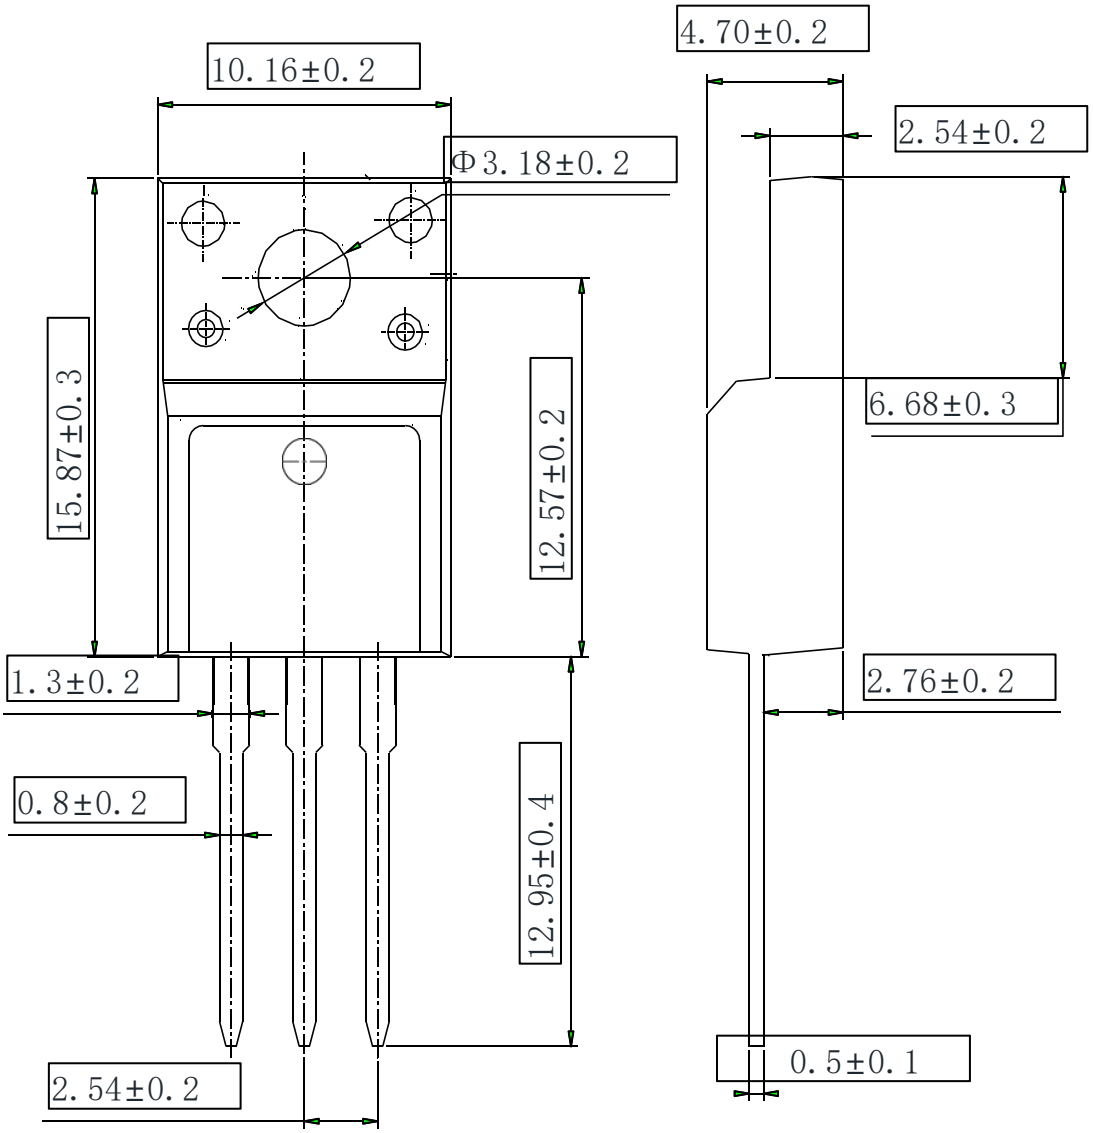

NOTE：
1The plastic package is not marked as smooth surfaceRa=0.1;Subglossy surfaceRa=0.8
2.Undeclared tolerance±0.15,Unmarked filletRmax=0.25

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.