CoolMOS™ Power Transistor


Features

- New revolutionary high voltage technology
- Ultra low gate charge
- Periodic avalanche rated
- Extreme d*v*/d*t* rated
- Ultra low effective capacitances
- Improved transconductance
- Pb-free lead plating; RoHS compliant
- Qualified according to JEDEC[0)] for target applications


Product Summary

V_{DS} @ $T_{j,max}$	650	V
$R_{DS(on),max}$	0.1	Ω
I_D	34.6	A

PG-TO247



Type	Package	Ordering Code	Marking
SPW35N60C3	PG-TO247	Q67040-S4673	35N60C3



Maximum ratings, at T_j=25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	T_C=25 °C	34.6	A
		T_C=100 °C	21.9	
Pulsed drain current[1)]	$I_{D,pulse}$	T_C=25 °C	103.8	
Avalanche energy, single pulse	E_{AS}	I_D=17.3 A, V_{DD}=50 V	1500	mJ
Avalanche energy, repetitive t_{AR}[1),2)]	E_{AR}	I_D=34.6 A, V_{DD}=50 V	1.5	
Avalanche current, repetitive t_{AR}[1)]	I_{AR}		34.6	A
Drain source voltage slope	d*v*/d*t*	I_D=34.6 A, V_{DS}=480 V, T_j=125 °C	50	V/ns
Gate source voltage	V_{GS}	static	±20	V
	V_{GS}	AC (*f*>1 Hz)	±30	
Power dissipation	P_{tot}	T_C=25 °C	313	W
Operating and storage temperature	T_j, T_{stg}		-55 ... 150	°C
Reverse diode dv/dt [6)]	dv/dt		15	V/ns

Please note the new package dimensions arccording to PCN 2009-134-A

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Thermal characteristics						
Thermal resistance, junction - case	R_{thJC}		-	-	0.4	K/W
Thermal resistance, junction - ambient	R_{thJA}	leaded	-	-	62	
Soldering temperature, wavesoldering	T_{sold}	1.6 mm (0.063 in.) from case for 10 s	-	-	260	°C
Electrical characteristics, at T_j=25 °C, unless otherwise specified						
Static characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS}=0 V, I_D=250 µA	600	-	-	V
Avalanche breakdown voltage	$V_{(BR)DS}$	V_{GS}=0 V, I_D=34.6 A	-	700	-	
Gate threshold voltage	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=1.9 mA	2.1	3	3.9	
Zero gate voltage drain current	I_{DSS}	V_{DS}=600 V, V_{GS}=0 V, T_j=25 °C	-	0.1	1	µA
		V_{DS}=600 V, V_{GS}=0 V, T_j=150 °C	-	-	100	
Gate-source leakage current	I_{GSS}	V_{GS}=20 V, V_{DS}=0 V	-	-	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	V_{GS}=10 V, I_D=21.9 A, T_j=25 °C	-	0.081	0.1	Ω
		V_{GS}=10 V, I_D=21.9 A, T_j=150 °C	-	0.2	-	
Gate resistance	R_G	f=1 MHz, open drain	-	0.6	-	
Transconductance	g_{fs}	$\|V_{DS}\|>2\|I_D\|R_{DS(on)max}$, I_D=21.9 A	-	36	-	S

Please note the new package dimensions arccording to PCN 2009-134-A

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Dynamic characteristics						
Input capacitance	C_{iss}	V_{GS}=0 V, V_{DS}=25 V, f=1 MHz	-	4500	-	pF
Output capacitance	C_{oss}		-	1500	-	
Reverse transfer capacitance	C_{rss}		-	100	-	
Effective output capacitance, energy related[3)]	$C_{o(er)}$	V_{GS}=0 V, V_{DS}=0 V to 480 V	-	180	-	
Effective output capacitance, time related[4)]	$C_{o(tr)}$		-	324	-	
Turn-on delay time	$t_{d(on)}$	V_{DD}=480 V, V_{GS}=10 V, I_D=34.6 A, R_G=3.3 Ω	-	10	-	ns
Rise time	t_r		-	5	-	
Turn-off delay time	$t_{d(off)}$		-	70	-	
Fall time	t_f		-	10	-	
Gate Charge Characteristics						
Gate to source charge	Q_{gs}	V_{DD}=480 V, I_D=34.6 A, V_{GS}=0 to 10 V	-	18	-	nC
Gate to drain charge	Q_{gd}		-	70	-	
Gate charge total	Q_g		-	150	200	
Gate plateau voltage	$V_{plateau}$		-	5.3	-	V

[1)] Pulse width limited by maximum temperature $T_{j,max}$ only

[2)] Repetitive avalanche causes additional power losses that can be calculated as $P_{AV}=E_{AR}*f$.

[3)] $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 80% V_{DSS}.

[4)] $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80% V_{DSS}.

[6)] I_{SD}<=I_D, di/dt<=200A/us, V_{DClink}=400V, V_{peak}<$V_{BR, DSS}$, T_j<$T_{j,max}$.
Identical low-side and high-side switch.


[0)] J-STD20 and JESD22

Please note the new package dimensions arccording to PCN 2009-134-A

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Reverse Diode						
Diode continuous forward current	I_S	T_C=25 °C	-	-	34.6	A
Diode pulse current	$I_{S,pulse}$		-	-	103.8	
Diode forward voltage	V_{SD}	V_{GS}=0 V, I_F=34.6 A, T_j=25 °C	-	0.95	1.2	V
Reverse recovery time	t_{rr}	V_R=480 V, I_F=I_S, di_F/dt=100 A/µs	-	600	-	ns
Reverse recovery charge	Q_{rr}		-	21	-	µC
Peak reverse recovery current	I_{rrm}		-	90	-	A

Typical Transient Thermal Characteristics

Symbol	Value	Unit	Symbol	Value	Unit
	typ.			typ.	
R_{th1}	0.00441	K/W	C_{th1}	0.00037	Ws/K
R_{th2}	0.00608		C_{th2}	0.00223	
R_{th3}	0.0341		C_{th3}	0.00315	
R_{th4}	0.0602		C_{th4}	0.0179	
R_{th5}	0.0884		C_{th5}	0.098	
			C_{th6}	4.4[5)]	

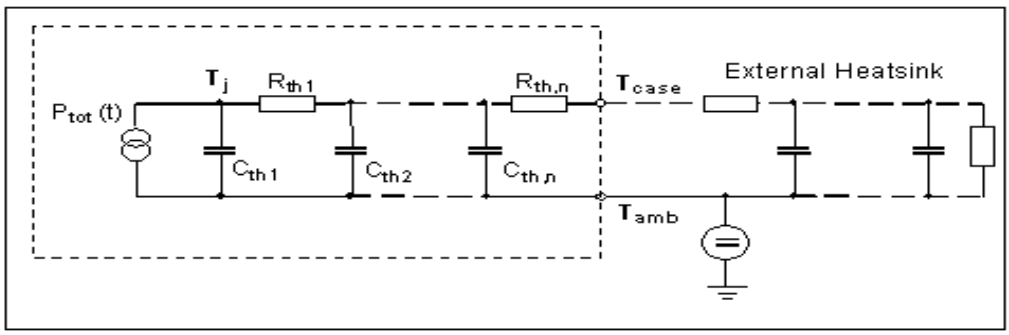


[5)] C_{th6} models the additional heat capacitance of the package in case of non-ideal cooling. It is not needed if R_{thCA}=0 K/W.

Please note the new package dimensions arccording to PCN 2009-134-A

1 Power dissipation


$P_{tot}=f(T_C)$

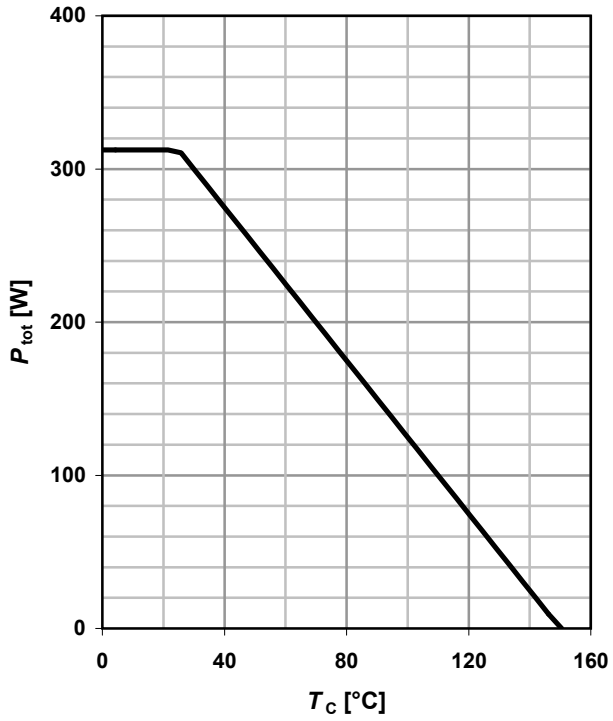

2 Safe operating area

$I_D=f(V_{DS})$; $T_C=25$ °C; $D=0$


parameter: t_p

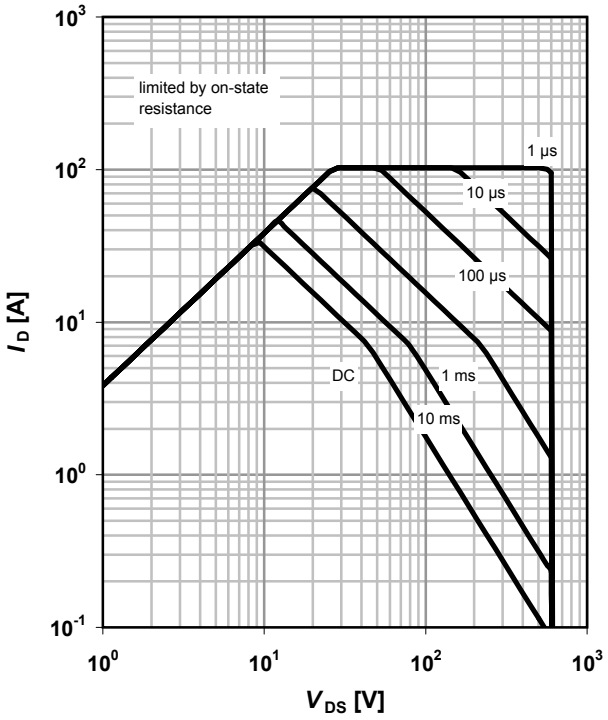

3 Max. transient thermal impedance

$I_D=f(V_{DS})$; $T_j=25$ °C


parameter: $D=t_p/T$

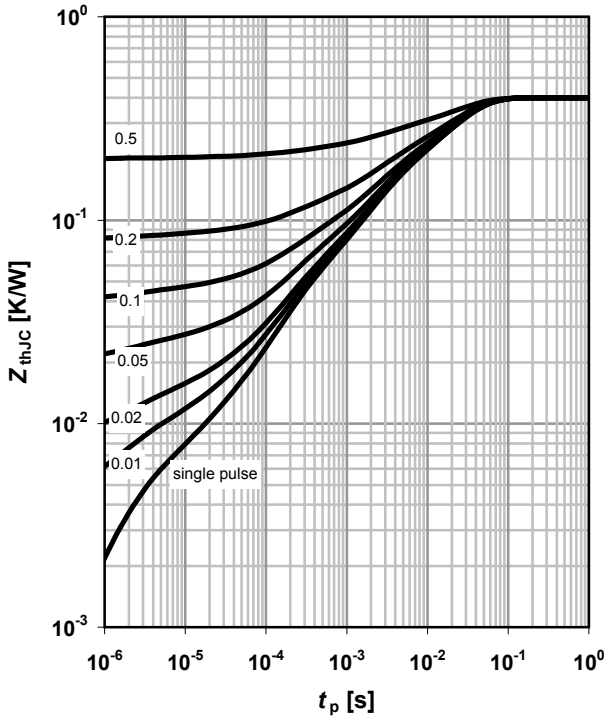

4 Typ. output characteristics

$I_D=f(V_{DS})$; $T_j=25$ °C

parameter: V_{GS}

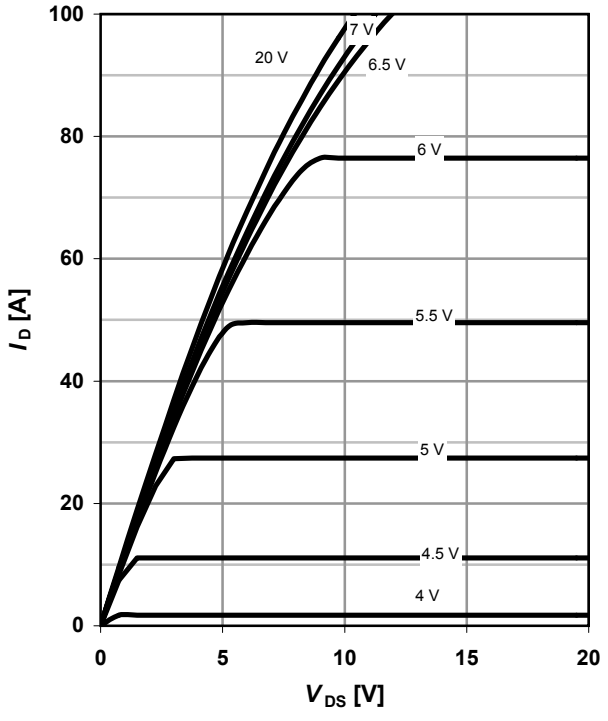


Please note the new package dimensions arccording to PCN 2009-134-A

5 Typ. output characteristics

$I_D=f(V_{DS})$; $T_j=150$ °C


parameter: V_{GS}

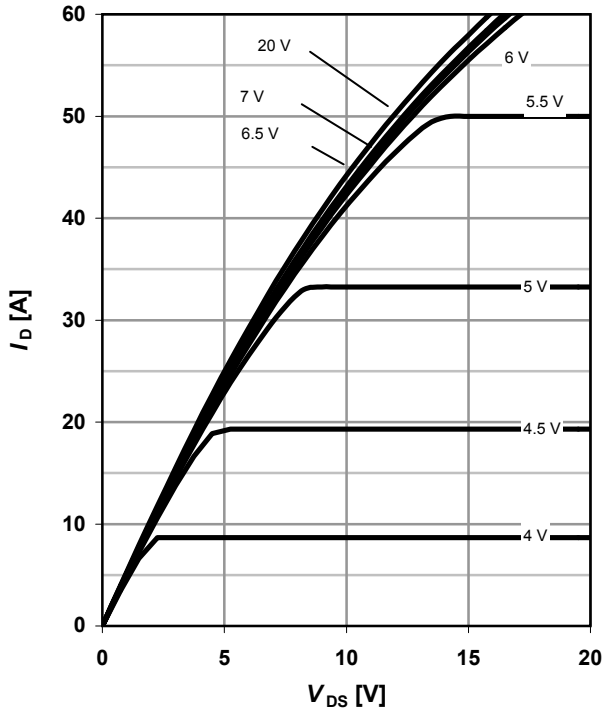

6 Typ. drain-source on-state resistance


$R_{DS(on)}=f(I_D)$; $T_j=150$ °C

parameter: V_{GS}

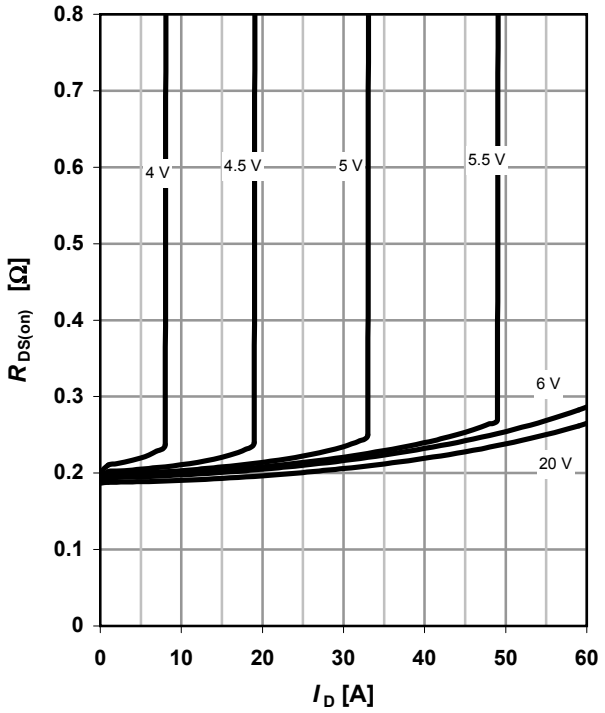

7 Drain-source on-state resistance


$R_{DS(on)}=f(T_j)$; $I_D=21.9$ A; $V_{GS}=10$ V

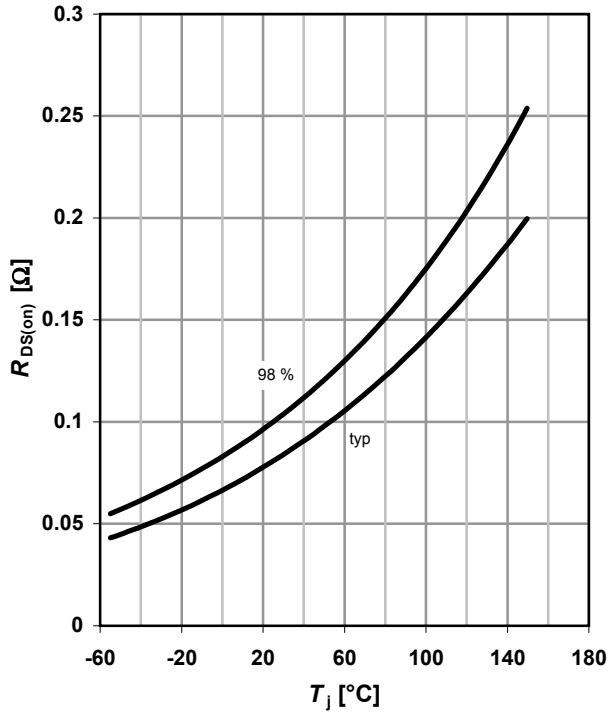

8 Typ. transfer characteristics

$I_D=f(V_{GS})$; $|V_{DS}|>2|I_D|R_{DS(on)max}$

parameter: T_j

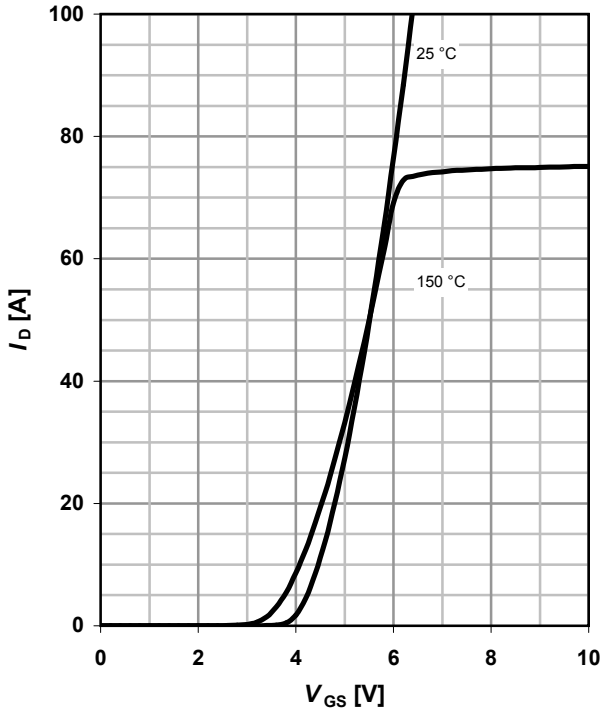


Please note the new package dimensions arccording to PCN 2009-134-A

9 Typ. gate charge

V_{GS}=f(Q_{gate}); I_D=34.6 A pulsed


parameter: V_{DD}

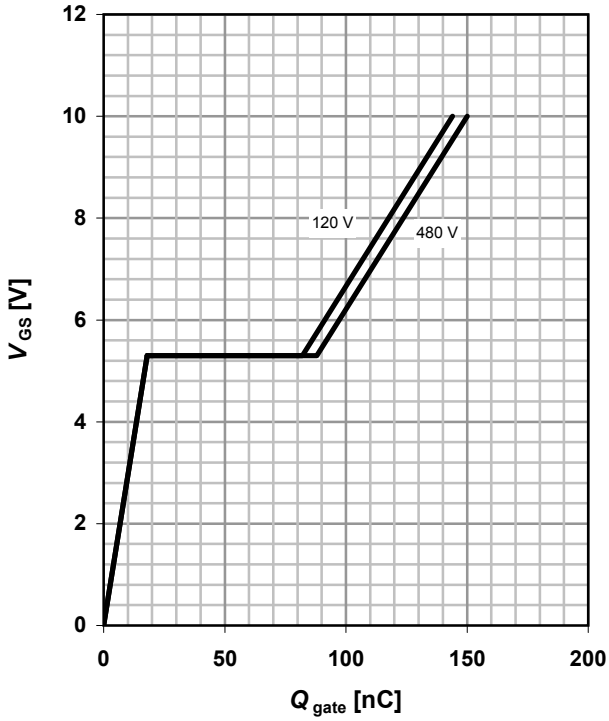

10 Forward characteristics of reverse diode

I_F=f(V_{SD})


parameter: T_j

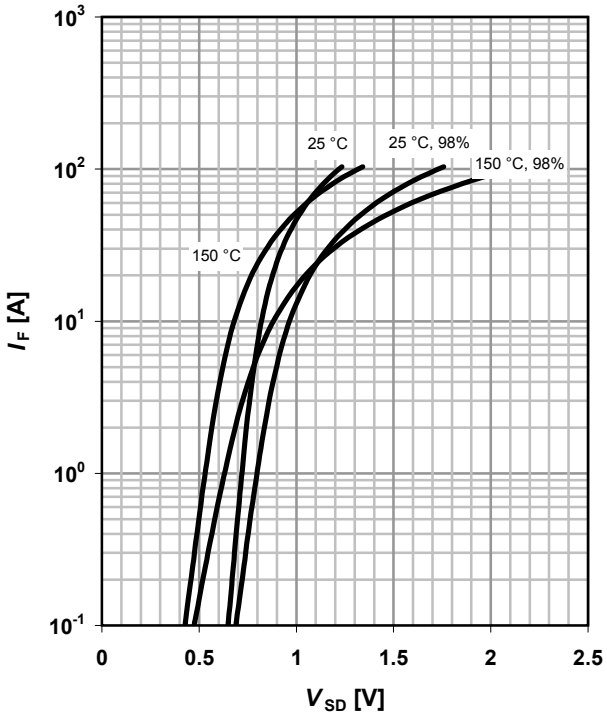

11 Avalanche SOA


I_{AR}=f(t_{AR})

parameter: $T_{j(start)}$

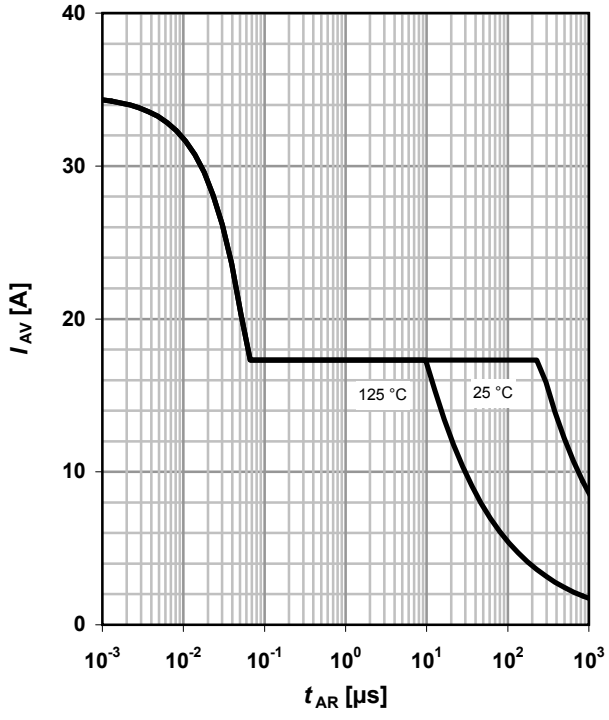

12 Avalanche energy


E_{AS}=f(T_j); I_D=17.3 A; V_{DD}=50 V

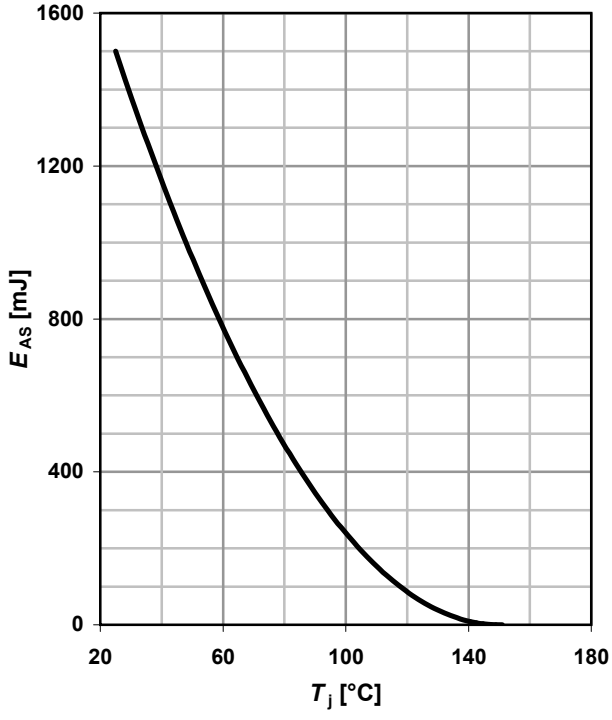

Please note the new package dimensions arccording to PCN 2009-134-A


13 Drain-source breakdown voltage

$V_{BR(DSS)}$=f(T_j); I_D=0.25 mA

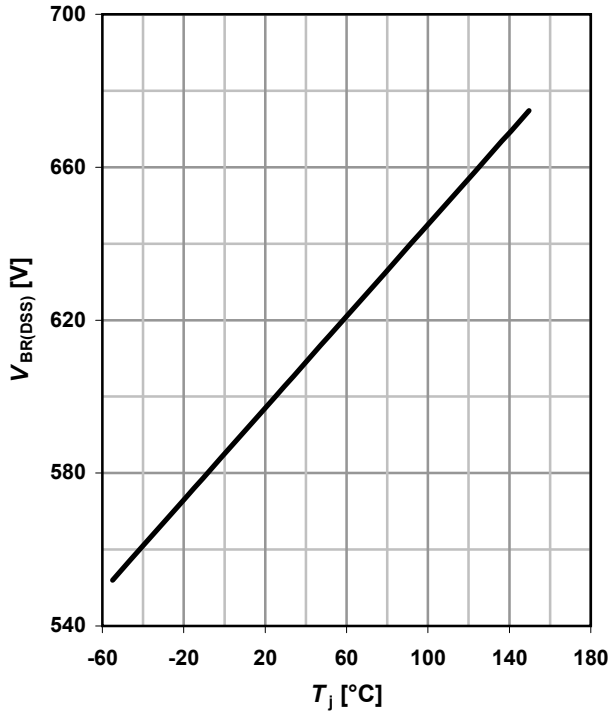


14 Typ. capacitances

C=f(V_{DS}); V_{GS}=0 V; f=1 MHz

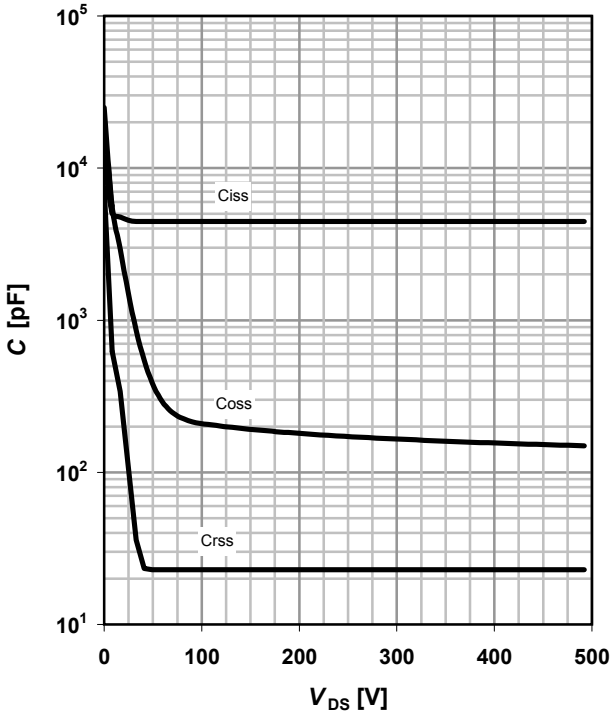


15 Typ. C_{oss} stored energy

E_{oss}=f(V_{DS})

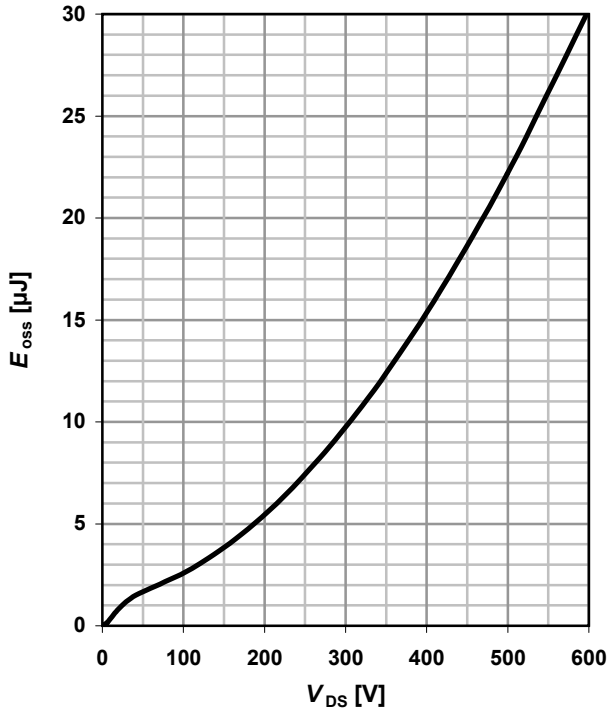


Please note the new package dimensions arccording to PCN 2009-134-A

Definition of diode switching characteristics

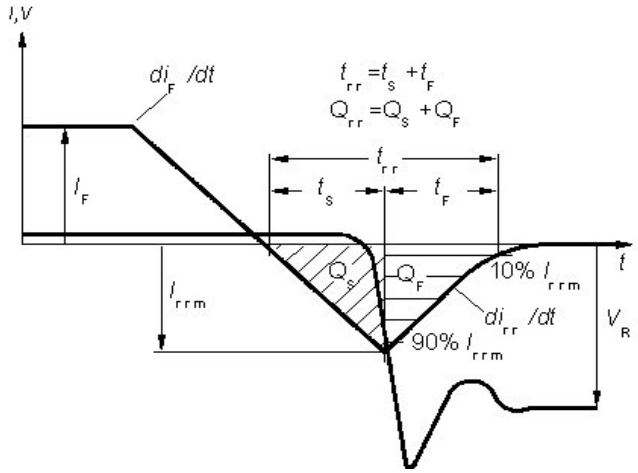

Please note the new package dimensions arccording to PCN 2009-134-A

PG-TO-247-3-1

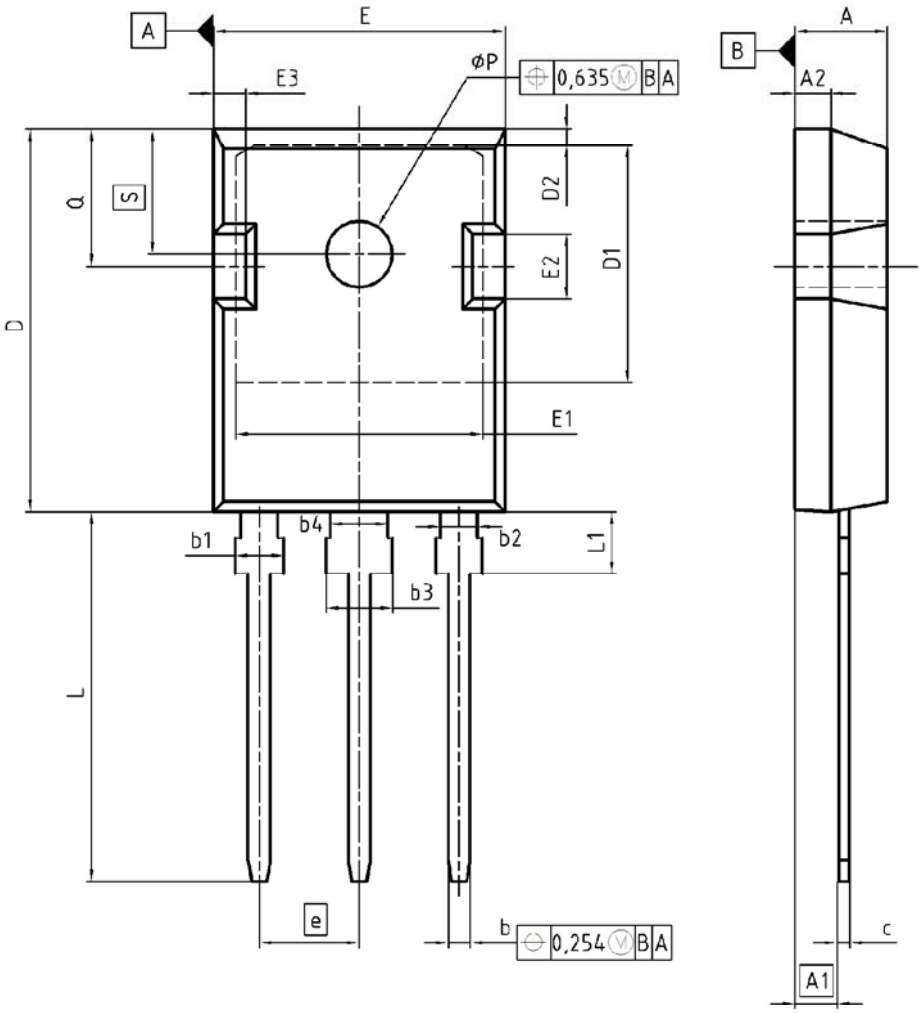

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.16	0.193	0.203
A1	2.27	2.53	0.089	0.099
A2	1.85	2.11	0.073	0.083
b	1.07	1.33	0.042	0.052
b1	1.90	2.41	0.075	0.095
b2	1.90	2.16	0.075	0.085
b3	2.87	3.38	0.113	0.133
b4	2.87	3.13	0.113	0.123
c	0.55	0.68	0.022	0.027
D	20.82	21.10	0.820	0.831
D1	16.25	17.65	0.640	0.695
D2	1.05	1.35	0.041	0.053
E	15.70	16.03	0.618	0.631
E1	13.10	14.15	0.516	0.557
E2	3.68	5.10	0.145	0.201
E3	1.68	2.60	0.066	0.102
e	5.44		0.214	
N	3		3	
L	19.80	20.31	0.780	0.799
L1	4.17	4.47	0.164	0.176
øP	3.50	3.70	0.138	0.146
Q	5.49	6.00	0.216	0.236
S	6.04	6.30	0.238	0.248

DOCUMENT NO.
Z8B00003327

SCALE 0 5 5 7.5mm

EUROPEAN PROJECTION

ISSUE DATE
17-12-2007

REVISION
03

Please note the new package dimensions arccording to PCN 2009-134-A

Published by
Infineon Technologies AG
81726 Munich, Germany
© 2008 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.


Information
For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings
Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Please note the new package dimensions arccording to PCN 2009-134-A

1 New package outlines TO-247

Assembly capacity extension for CoolMOSTM technology products assembled in lead-free package PG-TO247-3 at subcontractor ASE (Weihai) Inc., China (Changes are marked in blue.)

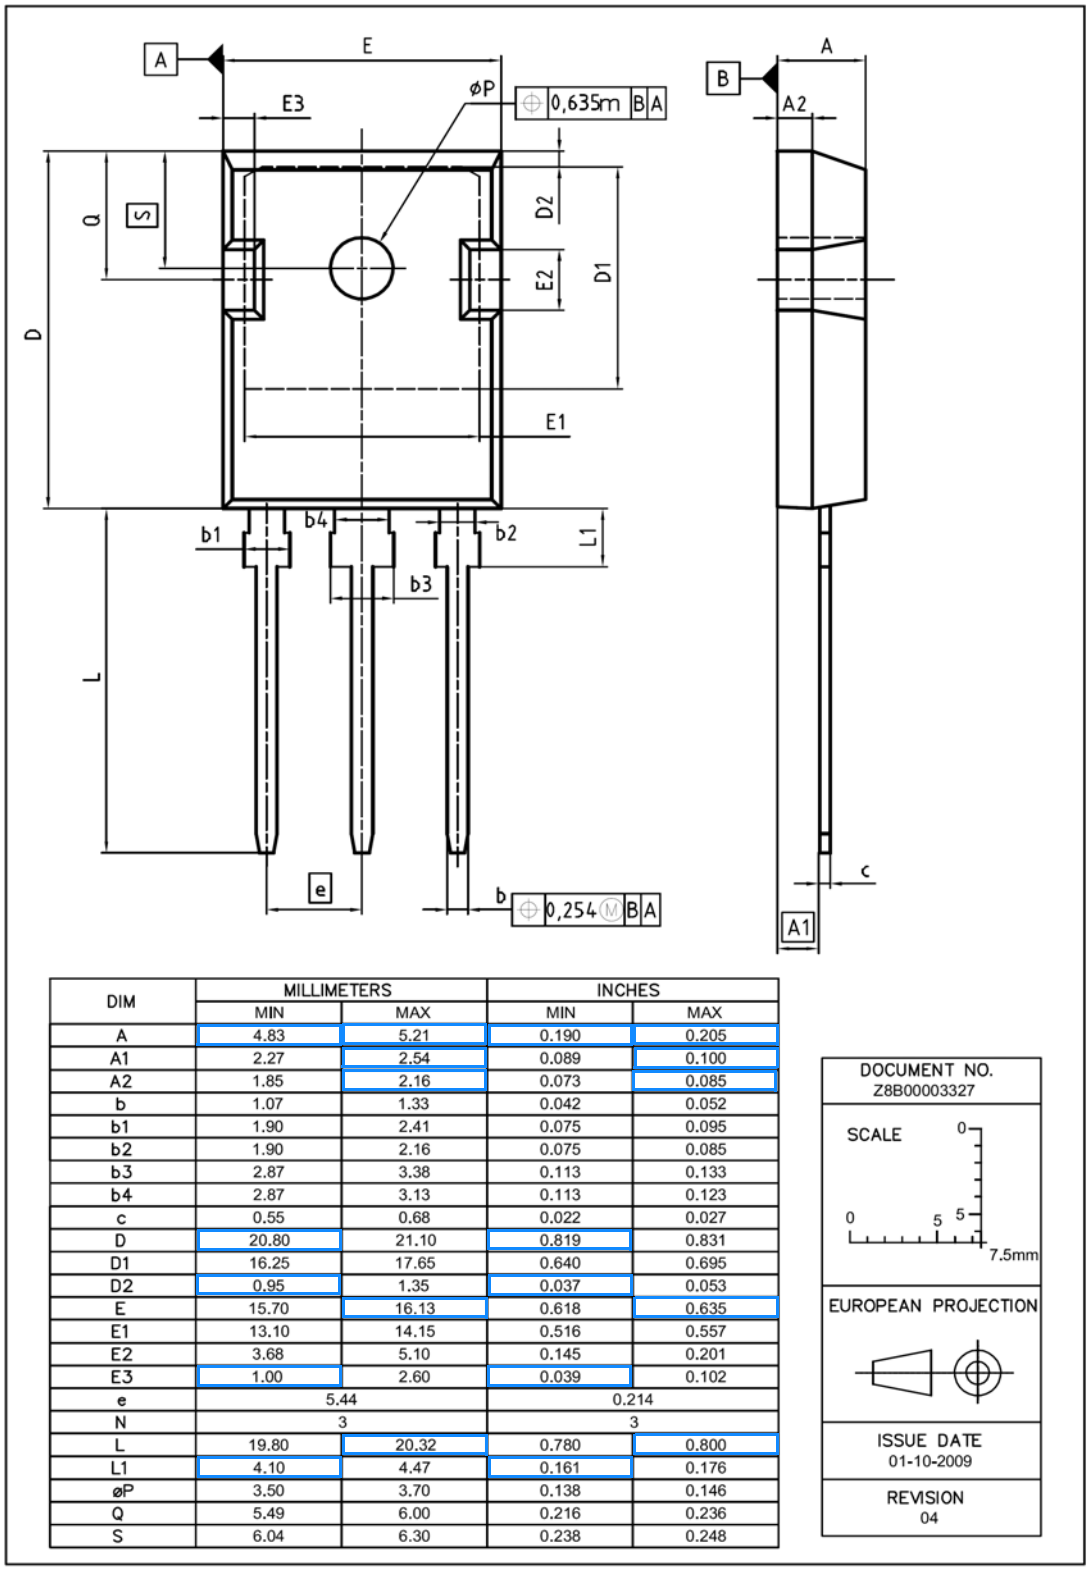

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.83	5.21	0.190	0.205
A1	2.27	2.54	0.089	0.100
A2	1.85	2.16	0.073	0.085
b	1.07	1.33	0.042	0.052
b1	1.90	2.41	0.075	0.095
b2	1.90	2.16	0.075	0.085
b3	2.87	3.38	0.113	0.133
b4	2.87	3.13	0.113	0.123
c	0.55	0.68	0.022	0.027
D	20.80	21.10	0.819	0.831
D1	16.25	17.65	0.640	0.695
D2	0.95	1.35	0.037	0.053
E	15.70	16.13	0.618	0.635
E1	13.10	14.15	0.516	0.557
E2	3.68	5.10	0.145	0.201
E3	1.00	2.60	0.039	0.102
e	5.44		0.214	
N	3		3	
L	19.80	20.32	0.780	0.800
L1	4.10	4.47	0.161	0.176
øP	3.50	3.70	0.138	0.146
Q	5.49	6.00	0.216	0.236
S	6.04	6.30	0.238	0.248

DOCUMENT NO.
Z8B00003327

SCALE 0 5 5 7.5mm

EUROPEAN PROJECTION

ISSUE DATE
01-10-2009

REVISION
04

Figure 1 Outlines TO-247, dimensions in mm/inches

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.