Ultra Low Quiescent Current 5V/150mA Fixed-Voltage Ultra Low LDO

DESCRIPTION

TS4264 is a 5V low-drop fixed-voltage regulator in an SOT-223 package. The IC regulates an input voltage in the range of 5.5V $<V_{IN}<$ 45V to V_{OUT} (rated) = 5.0V. The maximum output current is more than 150mA. This IC is designed with short circuit-proof and features temperature protection that disables the circuit at over-temperature.

FEATURES

- Fixed Output Voltage 5V
- Output Voltage Tolerance ±2%
- 150mA Current Capability
- Ultra Low Dropout Voltage
- Over Temperature Protection
- Very Low Current Consumption 400uA (max.)
- Short-Circuit Proof
- Reverse Polarity Proof
- Wide Temperature Polarity Range
- Suitable for use in Automotive Electronics

APPLICATION

- Control module
- Body and Chassis
- Powertrain

Pb-Free RoHS COMPLIANT HALOGEN FREE

SOT-223




Pin Definition:

1. Input
2. Ground
3. Output

Notes: Moisture sensitivity level: level 3. Per J-STD-020

TYPICAL APPLICATION CIRCUIT

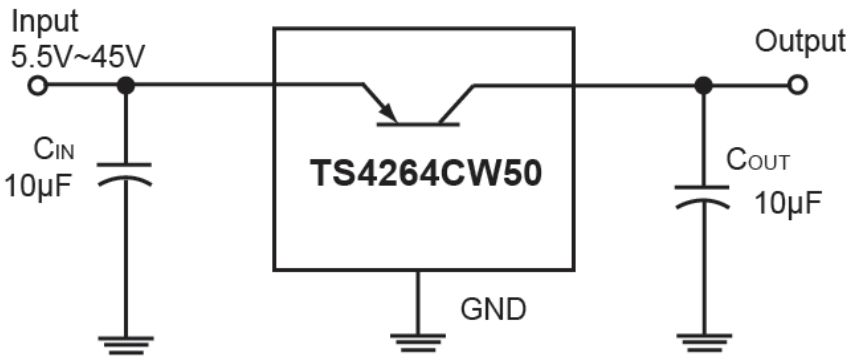

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)			
PARAMETER	**SYMBOL**	**LIMIT**	**UNIT**
Input Voltage	V_{IN}	-42 ~ 45	V
Input Voltage (Operating Range)	$V_{IN\ (OPR)}$	5.5 ~ 45	V
Input Current	I_{IN}	Internal Limited	
Output Voltage	V_{OUT}	-0.3 ~ 32	V
Output Current	I_{OUT}	Internal Limited	
Ground Current	$I_{GND\ (MIN)}$	50	mA
Junction Temperature	T_J	150	°C
Junction Temperature (Operating Range)	$T_{J\ (OPR)}$	-40 ~ +150	°C
Storage Temperature	T_{STG}	-50 ~ +150	°C

THERMAL PERFORMANCE (Note 1)			
PARAMETER	**SYMBOL**	**LIMIT**	**UNIT**
Thermal Resistance from Junction to Pin	$R_{\Theta JP}$	17	°C/W
Thermal Resistance from Junction to Ambient	$R_{\Theta JA}$	80	°C/W

ELECTRICAL SPECIFICATIONS (V_{IN}=13.5V, -40≤ T_J ≤+150, unless otherwise specified)					
PARAMETER	**CONDITIONS**	**MIN**	**TYP**	**MAX**	**UNIT**
Output Voltage	6V ≤ V_{IN} ≤ 28V, 5mA ≤ I_O ≤ 100mA	4.85	5.00	5.10	V
Output Current Limit		120	150	--	mA
Current Consumption	I_O = 1mA	--	--	400	μA
	I_O = 100mA		10	15	mA
Dropout Voltage (Note 2)	I_O = 100mA	--	0.22	0.5	V
Load Regulation	5mA ≤ Io ≤ 100mA, V_{IN} =13.5V	--	50	90	mV
Line Regulation	6V ≤ V_{IN} ≤ 28V, I_O = 5mA	--	15	30	mV
Ripple Rejection	F =100Hz, V_R =0.5V_{PP}	--	54	--	dB

Note:

1. Measured to pin 2 (tab)

2. Dropout voltage = V_{IN} – V_{OUT}
(Measured where V_{OUT} has dropped 100mV from the nominal value obtained at V_{IN} = 13.5V)


ORDERING INFORMATION

PART NO.	PACKAGE	PACKING
TS4264CW50 RPG	SOT-223	2,500pcs / 13” Reel

Note:

1. Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC.
2. Halogen-free according to IEC 61249-2-21 definition.

BLOCK DIAGRAM

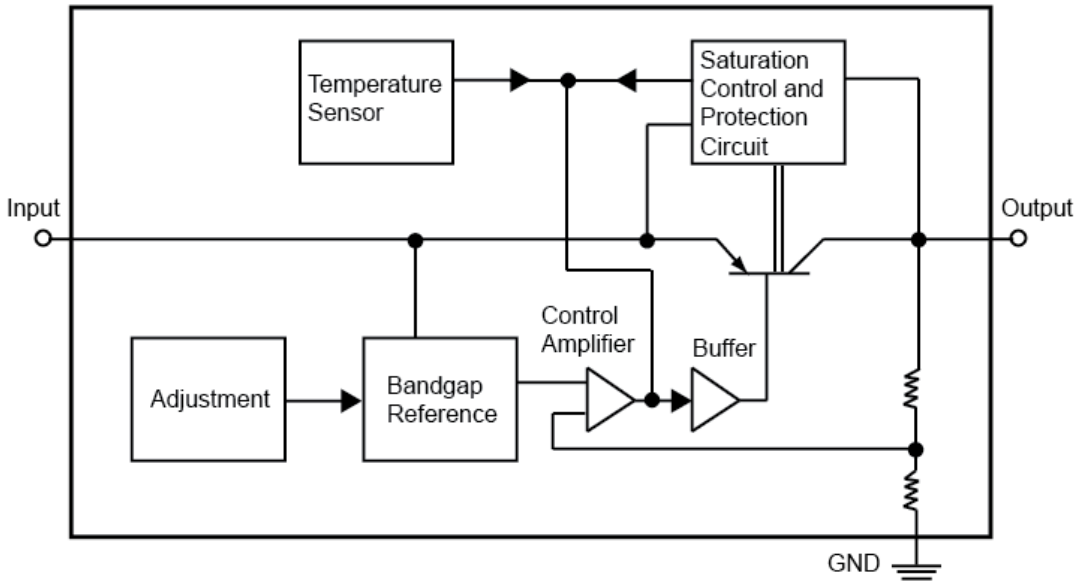

PIN DESCRIPTION

PIN NO.	NAME	FUNCTION
1	Input	Block to ground directly on IC with ceramic capacitor
2	Ground	Ground
3	Output	Block to ground with 10μF capacitor, ESR < 10Ω

APPLICATION INFORMATION

Dimensioning Information on External Components

The input capacitor C_{IN} is necessary for compensating line influences. Using a resistor of approx. 1Ω in series with C_{IN}, the oscillating of input inductivity and input capacitance can be clamped. The output capacitor C_{OUT} is necessary for the stability of the regulating circuit. Stability is guaranteed at values C_{OUT} ≥10μF and an ESR ≤ 10Ω within the operating temperature range.

Circuit Description

The control amplifier compares a reference voltage, which is kept highly precise by resistance adjustment, to a voltage that is proportional to the output voltage and drives the base of the series transistor via a buffer. Saturation control, working as a function of load current, prevents any over-saturation of the power element. The IC is additionally protected against overload, over temperature and reverse polarity

CHARACTERISTICS CURVES

(T_A = 25°C unless otherwise noted)

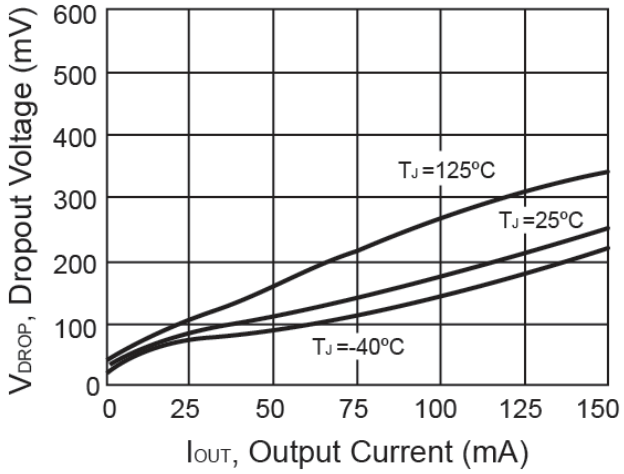


Figure 1. Output Voltage vs. Input Voltage

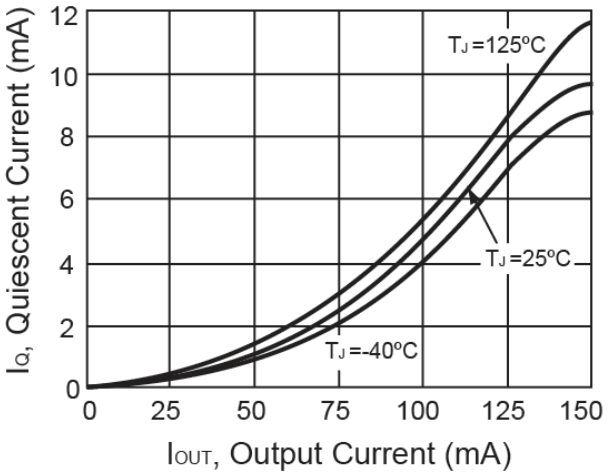


Figure 2. Quiescent Current vs. Output Current

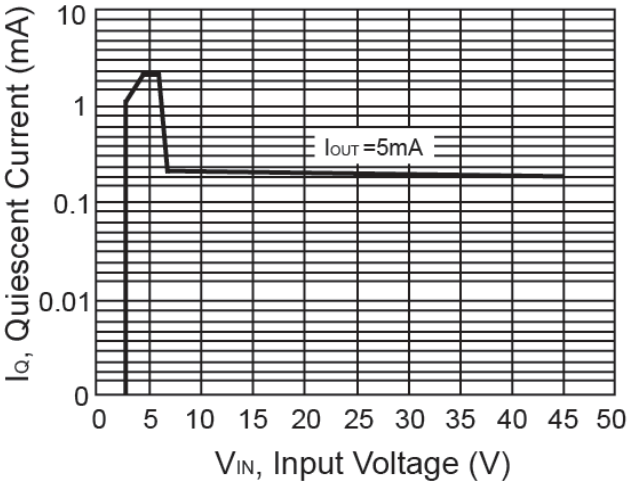


Figure 3. Quiescent Current vs. Input Voltage

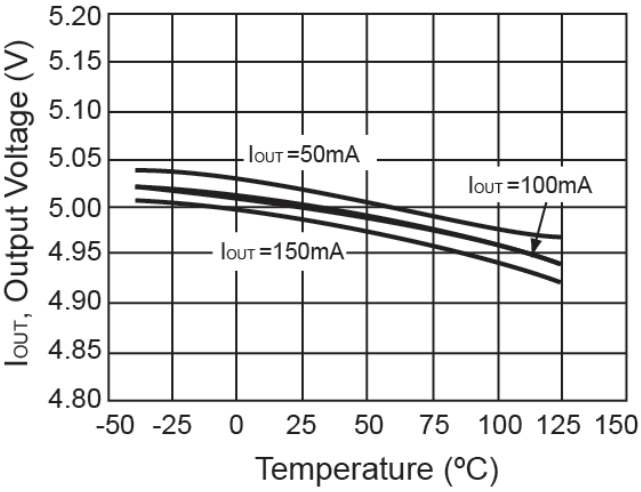


Figure 4. Output Current vs. Temperature

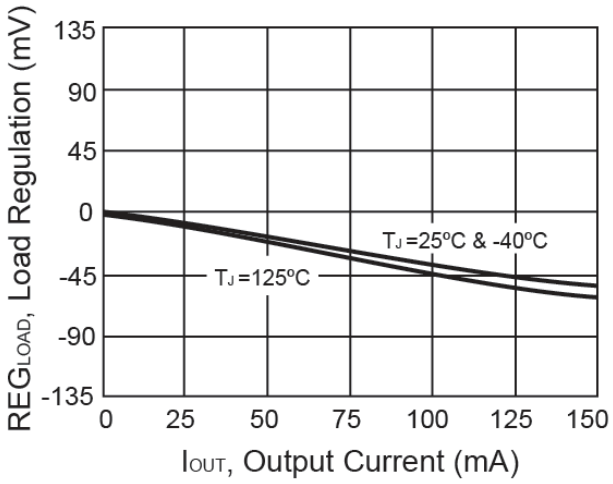


Figure 5. Load Regulation vs. Output Current


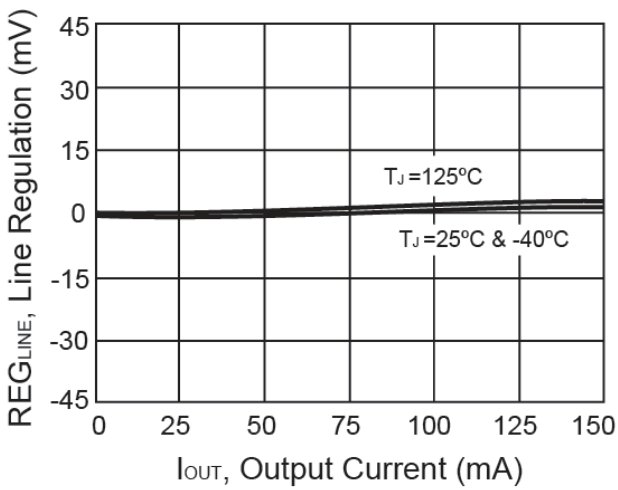



Figure 6. Line Regulation vs. Output Current

PACKAGE OUTLINE DIMENSIONS (Unit: Millimeters)


SOT-223

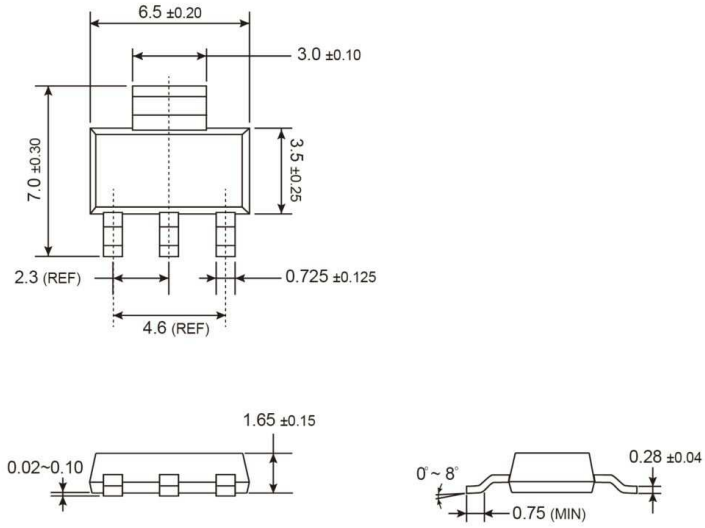

SUGGESTED PAD LAYOUT (Unit: Millimeters)



MARKING DIAGRAM



Y = Year Code

M = Month Code for Halogen Free Product

O	=Jan	**P**	=Feb	**Q**	=Mar	**R**	=Apr
S	=May	**T**	=Jun	**U**	=Jul	**V**	=Aug
W	=Sep	**X**	=Oct	**Y**	=Nov	**Z**	=Dec

L = Lot Code (1~9, A~Z)

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.