
TSM4806

20V N-Channel MOSFET

SOP-8



Pin Definition:

1. Source	8. Drain
2. Source	7. Drain
3. Source	6. Drain
4. Gate	5. Drain

Note:

MSL 1 (Moisture Sensitivity Level) per J-STD-020

Key Parameter Performance

Parameter		Value	Unit
V_{DS}		20	V
$R_{DS(on)}$ (max)	V_{GS} = 4.5V	20	mΩ
	V_{GS} = 2.5V	25	
	V_{GS} = 1.8V	31	
Q_g		12.3	nC


Features

- Advanced High Cell Density Trench Technology.
- Low Gate Charge.

Application

- Networking DC-DC Power System.
- Load Switch.

Block Diagram



N-Channel MOSFET

Ordering Information

Part No.	Package	Packing
TSM4806CS RLG	SOP-8	2.5kpcs / 13” Reel

•**Note:** Halogen-free according to IEC 61249-2-21 definition

Absolute Maximum Ratings (T_A=25°C, unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	20	V
Gate-Source Voltage		V_{GS}	±8	V
Continuous Drain Current [a]		I_D	28	A
Pulsed Drain Current [b]		I_{DM}	70	A
Continuous Source Current (Diode Conduction)[a,c]		I_S	28	A
Total Power Dissipation	T_A=25°C	P_D	2	W
Storage Temperature Range		T_{STG}	-55 to +150	°C
Operating Junction Temperature Range		T_J	-55 to +150	°C

Thermal Performance

Parameter	Symbol	Limit	Unit
Thermal Resistance Junction to Lead	$R\Theta_{JL}$	40	°C/W
Thermal Resistance Junction to Ambient	$R\Theta_{JA}$	62.5	°C/W

Notes:

a. The data tested by surface mounted on a 1 inch^2 FR-4 board with 2oz copper.

b. The data tested by pulsed, pulse width ≤ 300μs, duty cycle ≤ 2% surface mounted on FR4 Board, t ≤ 5s.

c. The data is theoretically the same as I_D and I_{DM}, in real applications, should be limited by total power dissipation.

Electrical Specifications

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	V_{GS} = 0V, I_D = 250μA	BV_{DSS}	20	--	--	V
Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250μA	$V_{GS(TH)}$	0.3	0.6	1.0	V
Gate-Source Leakage Current	V_{GS} = ±8V, V_{DS} = 0V	I_{GSS}	--	--	±100	nA
Drain-Source Leakage Current	V_{DS} = 16V, V_{GS} = 0V	I_{DSS}	--	--	1	μA
Drain-Source On-State Resistance	V_{GS} = 4.5V, I_D = 20A	$R_{DS(ON)}$	--	16	20	mΩ
	V_{GS} = 2.5V, I_D = 15A		--	20	25	
	V_{GS} = 1.8V, I_D = 10A			25	31	
Forward Transconductance	V_{DS} = 5V, I_D = 15A	g_{fs}	--	27	--	S
Diode Forward Voltage	I_S = 1A, V_{GS} = 0V	V_{SD}	--	--	1.2	V
Dynamic[b]						
Gate Resistance	V_{DS} =0V, V_{GS} =0V, f=1MHz	R_g	--	1.4	2.8	Ω
Total Gate Charge	V_{DS} = 15V, I_D = 15A, V_{GS} = 4.5V	Q_g	--	12.3	--	nC
Gate-Source Charge		Q_{gs}	--	1.95	--	
Gate-Drain Charge		Q_{gd}	--	3.08	--	
Input Capacitance	V_{DS} = 15V, V_{GS} = 0V, f = 1MHz	C_{iss}	--	961	--	pF
Output Capacitance		C_{oss}	--	92.3	--	
Reverse Transfer Capacitance		C_{rss}	--	80.4	--	
Reverse Recovery Time	I_F= 15A, dI/dt= 100A/μs, T_J=25°C	t_{rr}	--	6	--	ns
Reverse Recovery Charge		Q_{rr}	--	1.38	--	nC
Switching[b,c]						
Turn-On Delay Time	V_{DD} = 10V, I_D = 15A, V_{GS} = 4.5V, R_G = 3.3Ω	$t_{d(on)}$	--	3.02	--	ns
Turn-On Rise Time		t_r	--	13.1	--	
Turn-Off Delay Time		$t_{d(off)}$	--	28	--	
Turn-Off Fall Time		t_f	--	8.3	--	

Notes:


a. Pulse test: PW ≤ 300μs, duty cycle ≤ 2%

b. For DESIGN AID ONLY, not subject to production testing.


c. Switching time is essentially independent of operating temperature.

Electrical Characteristics Curve (T_A=25°C, unless otherwise noted)


Output Characteristics

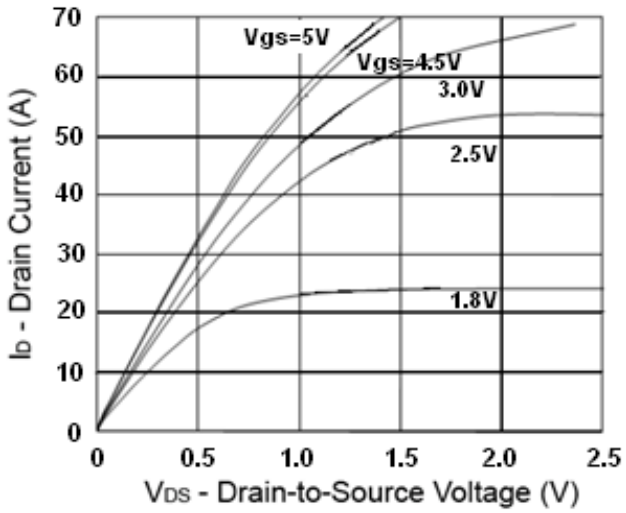


On-Resistance vs. Gate-Source Voltage

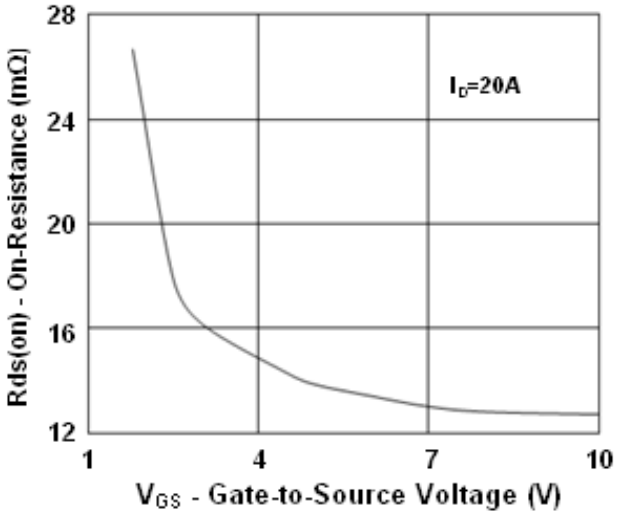


Source-Drain Diode Forward Voltage

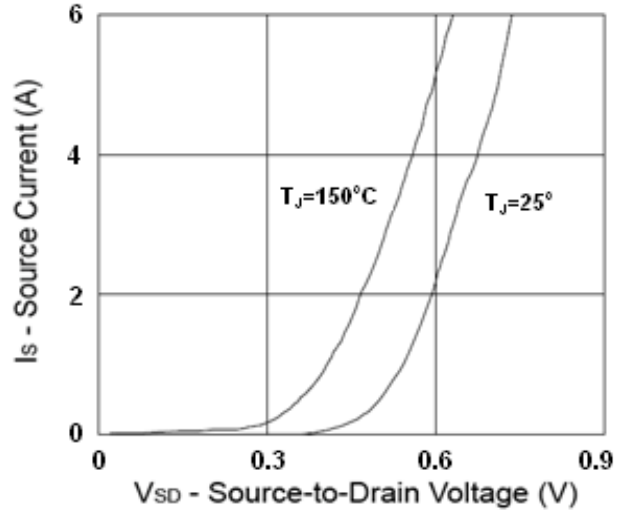


Gate Charge

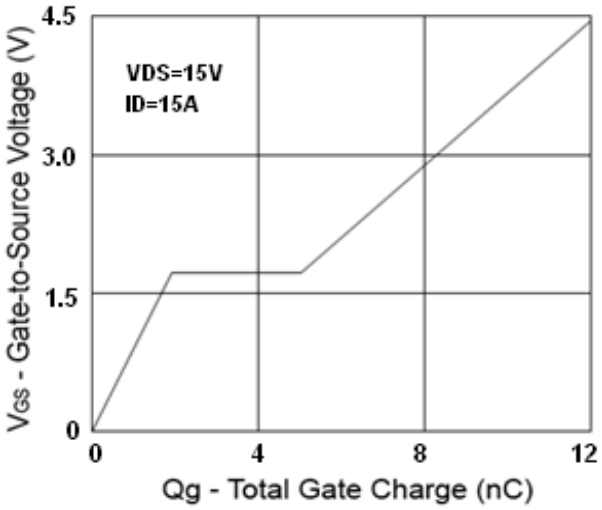

Normalized $V_{GS(th)}$ vs. T_J

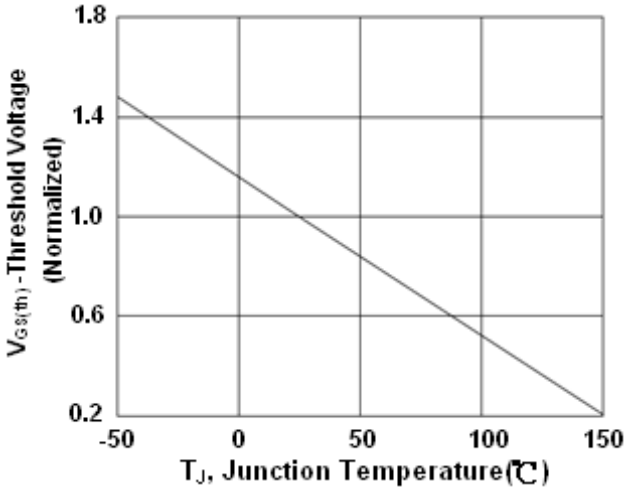


Normalized R_{DSON} vs. T_J

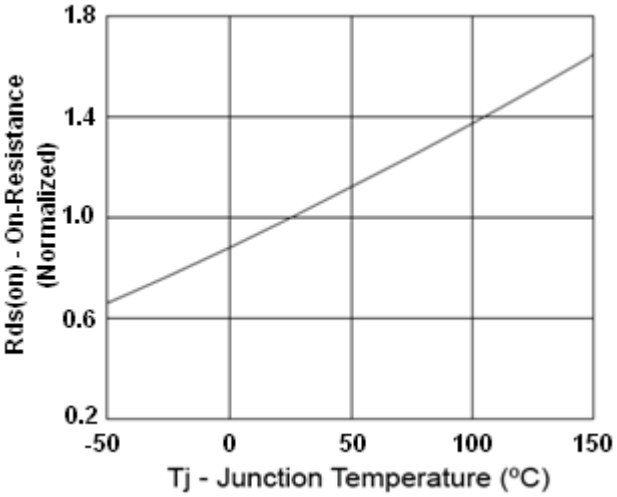


Electrical Characteristics Curve (T_A=25°C, unless otherwise noted)

Capacitance

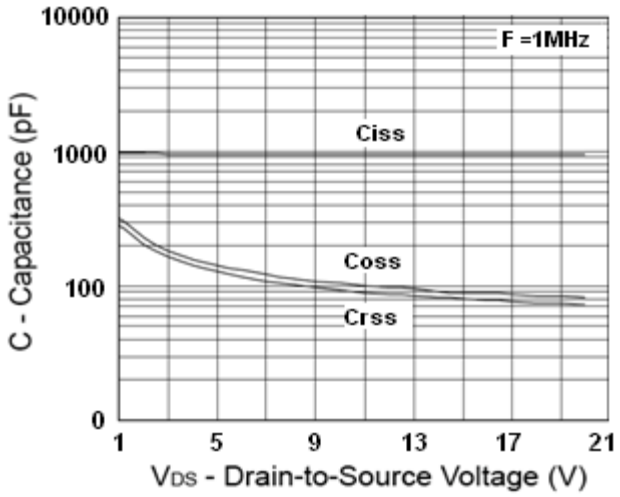


SOP-8 Mechanical Drawing

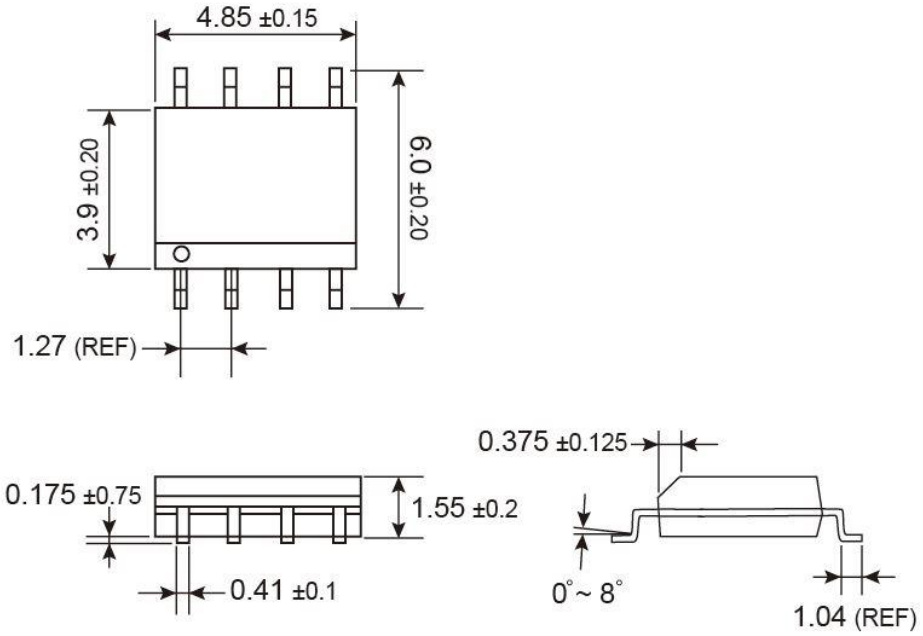

Unit: Millimeters

Marking Diagram



Y = Year Code
M = Month Code for Halogen Free Product
(**O**=Jan, **P**=Feb, **Q**=Mar, **R**=Apl, **S**=May, **T**=Jun, **U**=Jul, **V**=Aug, **W**=Sep, **X**=Oct, **Y**=Nov, **Z**=Dec)
L = Lot Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.