Si/SiC Hybrid Modules – EliteSiC, 3 Channel Flying Capacitor Boost 1000 V, 100 A IGBT, 1200 V, 30 A SiC Diode, Q2 Package

NXH300B100H4Q2F2, NXH300B100H4Q2F2SG-R

This high−density, integrated power module combines high−performance IGBTs with 1200 V SiC diode.

Features

- Extremely Efficient Trench with Field Stop Technology
- Low Switching Loss Reduces System Power Dissipation
- Module Design Offers High Power Density
- Low Inductive Layout
- 3−channel in Q2BOOST Package
- These are Pb−Free Devices

Typical Applications

- Solar Inverter
- Uninterruptible Power Supplies

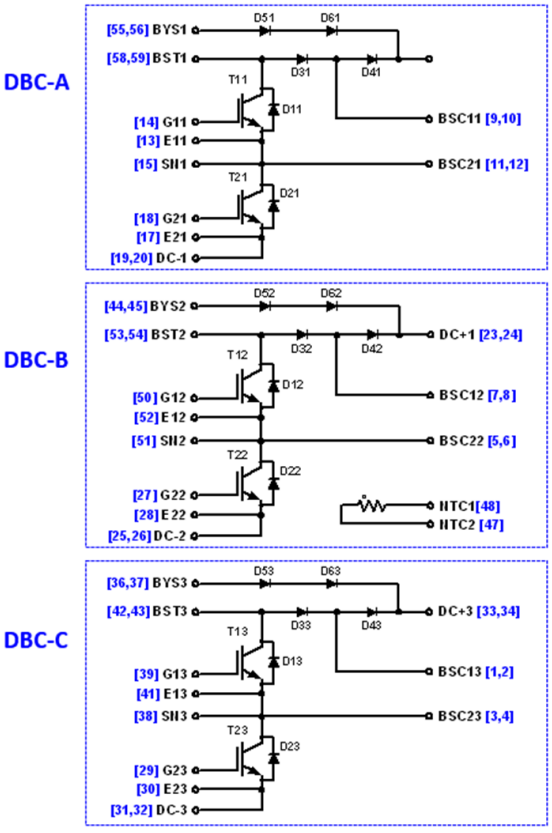

Figure 1. NXH300B100H4Q2F2PG/SG/SG−R Schematic Diagram



PIM53, 93x47 (PRESSFIT)
CASE 180CB



PIM53, 93x47 (SOLDER PIN)
CASE 180CC

MARKING DIAGRAM



NXH300B100H4Q2F2x = Specific Device Code (x = P, S)
AT = Assembly & Test Site Code
YYWW = Year and Work Week Code

PIN CONNECTION

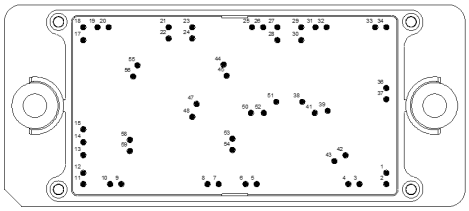

ORDERING INFORMATION

See detailed ordering and shipping information on page 11 of this data sheet.

© Semiconductor Components Industries, LLC, 2020

ABSOLUTE MAXIMUM RATINGS (Note 1) (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
IGBT (T11, T21, T12, T22, T13, T23)			
V_{CES}	Collector−Emitter voltage	1000	V
V_{GE}	Gate−Emitter Voltage Positive transient gate−emitter voltage (Tpulse = 5 μs, D < 0.10)	±20 30	V
I_C	Continuous Collector Current (@ V_{GE} = 20 V, T_C = 80°C)	73	A
$I_{C(Pulse)}$	Pulsed Peak Collector Current @ T_C = 80°C (T_J = 150°C)	219	A
P_{tot}	Power Dissipation (T_J = 150°C, T_C = 80°C)	194	W
T_{JMIN}	Minimum Operating Junction Temperature	−40	°C
T_{JMAX}	Maximum Operating Junction Temperature	175	°C
IGBT INVERSE DIODE (D11, D21, D12, D22, D13, D23) AND BYPASS DIODE (D51, D61, D52, D62, D53, D63)			
V_{RRM}	Peak Repetitive Reverse Voltage	1600	V
I_F	Continuous Forward Current @ T_C = 80°C	36	A
I_{FRM}	Repetitive Peak Forward Current (T_J = 150°C, T_J limited by T_{Jmax})	108	A
P_{tot}	Maximum Power Dissipation @ T_C = 80°C (T_J = 150°C)	79	W
T_{JMIN}	Minimum Operating Junction Temperature	−40	°C
T_{JMAX}	Maximum Operating Junction Temperature	150	°C
BOOST SILICON CARBIDE SCHOTTKY DIODE (D31, D41, D32, D42, D33, D43)			
V_{RRM}	Peak Repetitive Reverse Voltage	1200	V
I_F	Continuous Forward Current @ T_C = 80°C	36	A
I_{FRM}	Repetitive Peak Forward Current (T_J = 150°C, T_J limited by T_{Jmax})	108	A
P_{tot}	Maximum Power Dissipation @ T_C = 80°C (T_J = 150°C)	104	W
T_{JMIN}	Minimum Operating Junction Temperature	−40	°C
T_{JMAX}	Maximum Operating Junction Temperature	175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters.

THERMAL AND INSULATION PROPERTIES (Note 1) (T_J = 25°C unless otherwise noted)

Symbol	Rating	Value	Unit
THERMAL PROPERTIES			
T_{VJOP}	Operating Temperature under Switching Condition	−40 to 150	°C
T_{stg}	Storage Temperature Range	−40 to 125	°C
INSULATION PROPERTIES			
V_{is}	Isolation Test Voltage, t = 2 sec, 50 Hz (Note 3)	4000	V_{RMS}
	Creepage Distance	12.7	mm
CTI	Comparative Tracking Index	>600	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters.
3. 4000 VAC_{RMS} for 1 second duration is equivalent to 3333 VAC_{RMS} for 1 minute duration.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
IGBT (T11, T21, T12, T22, T13, T23)						
$V_{(BR)CES}$	Collector−Emitter Breakdown Voltage	V_{GE} = 0 V, I_C =1 mA	1000	1118	–	V
$V_{CE(SAT)}$	Collector−Emitter Saturation Voltage	V_{GE} = 15 V, I_C = 100 A, T_C = 25°C	–	1.80	2.25	V
		V_{GE} = 15 V, I_C = 100 A, T_C = 150°C	–	2.03	–	
$V_{GE(TH)}$	Gate−Emitter Threshold Voltage	V_{GE} = V_{CE}, I_C = 100 mA	4.1	5.08	5.9	V
I_{CES}	Collector−Emitter Cutoff Current	V_{GE} = 0 V, V_{CE} = 1000 V	–	–	800	μA
I_{GES}	Gate Leakage Current	V_{GE} = ±20 V, V_{CE} = 0 V	–	–	±400	nA
r_g	Internal Gate Resistor		–	5	–	Ω
$t_{d(on)}$	Turn−On Delay Time	T_j = 25°C V_{CE} = 600 V, I_C = 50 A V_{GE} = −9 V, +15 V, R_G = 6 Ω	–	95	–	ns
t_r	Rise Time		–	15.42	–	
$t_{d(off)}$	Turn−Off Delay Time		–	267	–	
t_f	Fall time		–	59	–	
E_{on}	Turn on switching loss		–	1030	–	μJ
E_{off}	Turn off switching loss		–	1200	–	
$t_{d(on)}$	Turn−On Delay Time	T_j = 125°C V_{CE} = 600 V, I_C = 50 A V_{GE} = −9 V, +15 V, R_G = 6 Ω	–	97	–	ns
t_r	Rise Time		–	18	–	
$t_{d(off)}$	Turn−Off Delay Time		–	314	–	
t_f	Fall time		–	93	–	
E_{on}	Turn on switching loss		–	1260	–	μJ
E_{off}	Turn off switching loss		–	2140	–	
C_{ies}	Input capacitance	V_{CE} =20 V, V_{GE} = 0 V, f = 1 MHz	–	6323	–	pF
C_{oes}	Output capacitance		–	241	–	
C_{res}	Reverse transfer capacitance		–	34	–	
Q_g	Gate Charge	V_{CE} = 600 V, V_{GE} = −15/+15 V, I_C = 75 A	–	340	–	nC
R_{thJH}	Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness = 2.1 Mil ±2% λ = 2.9 W/mK	–	0.66	–	K/W
R_{thJC}	Thermal Resistance − chip−to−case		–	0.48	–	K/W
IGBT INVERSE DIODE (D11, D21, D12, D22, D13, D23) AND BYPASS DIODE (D51, D61, D52, D62, D53, D63)						
V_F	Diode Forward Voltage	I_F = 30 A, T_J = 25°C	–	1.04	1.7	V
		I_F = 30 A, T_J = 150°C	–	0.94	–	
R_{thJH}	Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness = 2.1 Mil ±2% λ = 2.9 W/mK	–	1.04	–	K/W
BOOST SILICON CARBIDE SCHOTTKY DIODE (D31, D41, D32, D42, D33, D43)						
I_R	Diode Reverse Leakage Current	V_R = 1200 V, T_J = 25°C	–	–	600	μA
V_F	Diode Forward Voltage	I_F = 30 A, T_J = 25°C	–	1.42	1.7	V
		I_F = 30 A, T_J = 150°C	–	1.85	–	
t_{rr}	Reverse Recovery Time	T_J = 25°C V_{DS} = 600 V, I_C = 50 A V_{GE} = −9 V, 15 V, R_G = 1 Ω	–	15	–	ns
Q_{rr}	Reverse Recovery Charge		–	128	–	nC
I_{RRM}	Peak Reverse Recovery Current		–	13	–	A
di/dt	Peak Rate of Fall of Recovery Current		–	4200	–	A/μs
E_{rr}	Reverse Recovery Energy		–	16	–	μJ

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (continued)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
BOOST SILICON CARBIDE SCHOTTKY DIODE (D31, D41, D32, D42, D33, D43)						
t_{rr}	Reverse Recovery Time	T_J = 125°C V_{DS} = 600 V, I_C = 50 A V_{GE} = −9 V, 15 V, R_G = 1 Ω	–	19	–	ns
Q_{rr}	Reverse Recovery Charge		–	175	–	nC
I_{RRM}	Peak Reverse Recovery Current		–	17	–	A
di/dt	Peak Rate of Fall of Recovery Current		–	3153	–	A/μs
E_{rr}	Reverse Recovery Energy		–	18	–	μJ
R_{thJH}	Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness = 2.1 Mil ±2% λ = 2.9 W/mK	–	0.85	–	K/W
R_{thJC}	Thermal Resistance − chip−to−case		–	0.73	–	K/W
THERMISTOR CHARACTERISTICS						
R_{25}	Nominal resistance		–	22	–	kΩ
R_{100}	Nominal resistance	T = 100°C	–	1486	–	Ω
ΔR/R	Deviation of R25		−5	–	5	%
P_D	Power dissipation		–	200	–	mW
	Power dissipation constant		–	2	–	mW/K
	B−value	B (25/50), tolerance ±3%	–	3950	–	K
	B−value	B (25/100), tolerance ±3%	–	3998	–	K

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL CHARACTERISTICS − IGBT, INVERSE & BYPASS DIODE AND BOOST DIODE

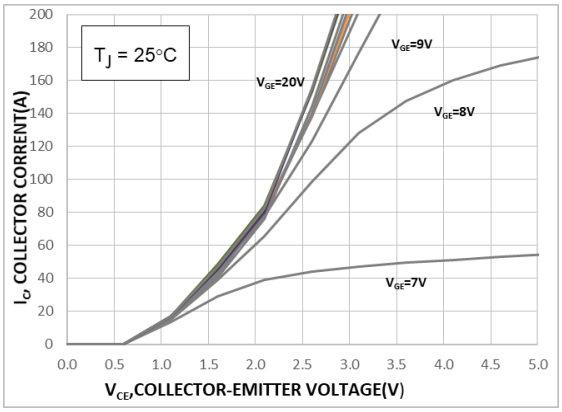

Figure 2. Typical Output Characteristics

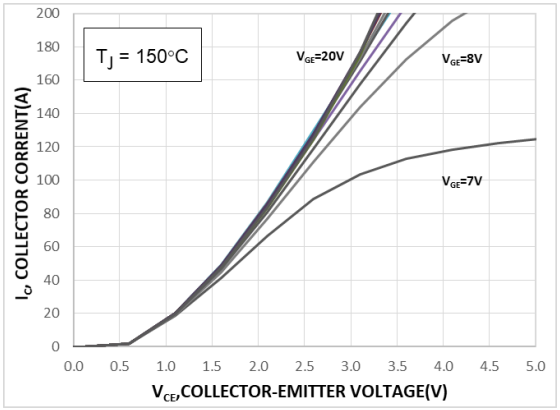

Figure 3. Typical Output Characteristics

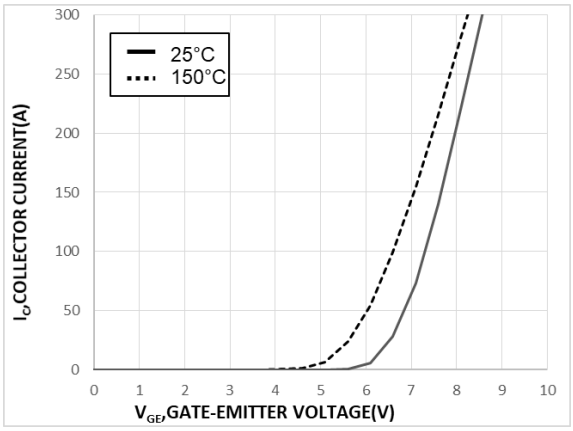

Figure 4. Transfer Characteristics

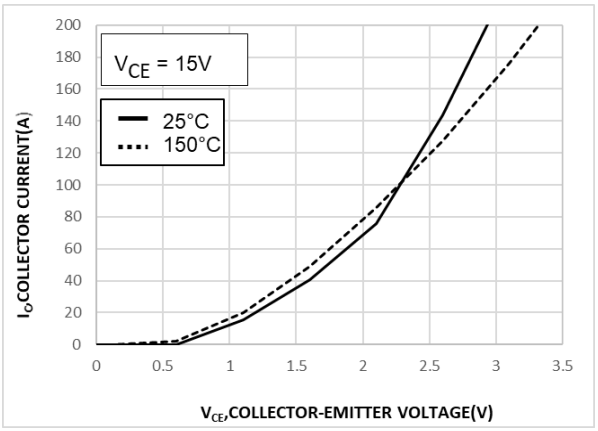

Figure 5. Typical Saturation Voltage Characteristics

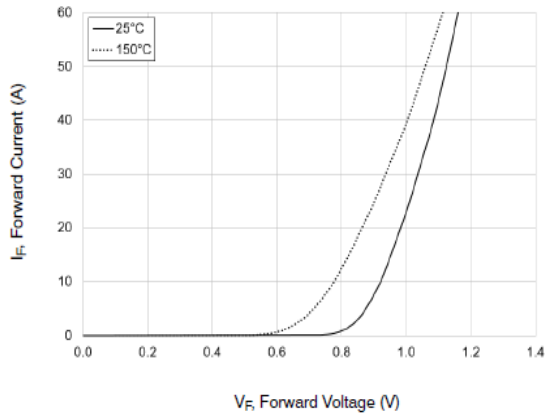

Figure 6. Inverse Diode Forward Characteristics

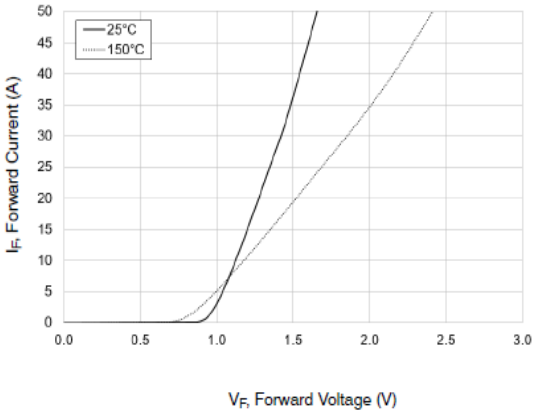

Figure 7. Boost Diode Forward Characteristics

TYPICAL CHARACTERISTICS − IGBT, INVERSE & BYPASS DIODE AND BOOST DIODE (CONTINUED)

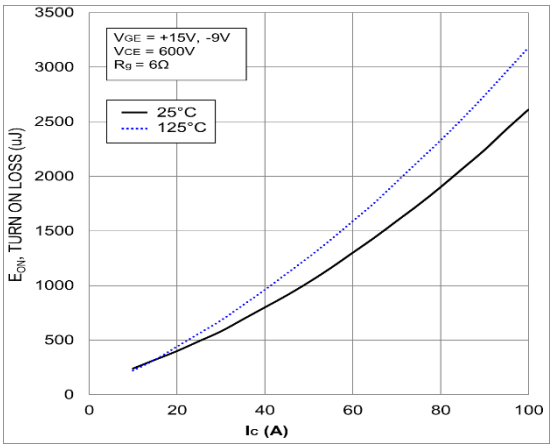

Figure 8. Typical Turn On Loss vs. I_C

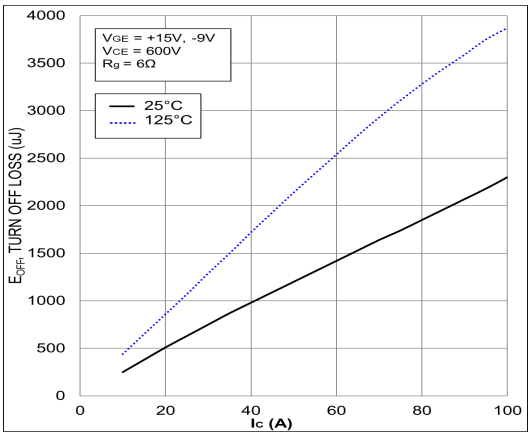

Figure 9. Typical Turn Off Loss vs. I_C

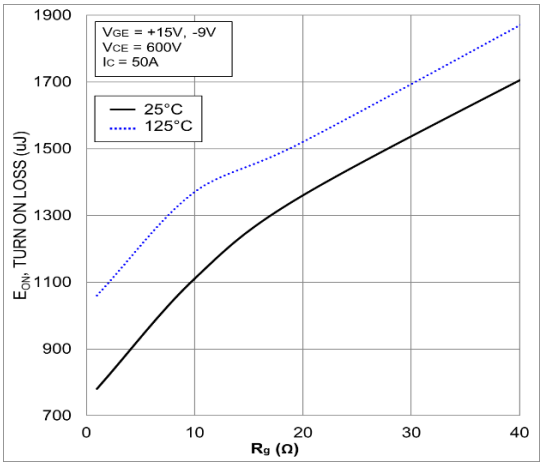

Figure 10. Typical Turn On Loss vs. R_g

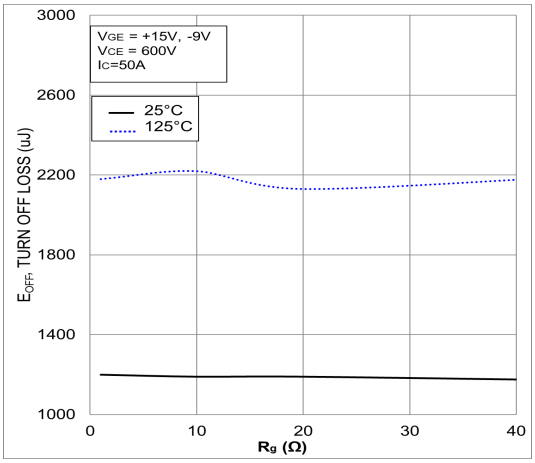

Figure 11. Typical Turn Off Loss vs. R_g

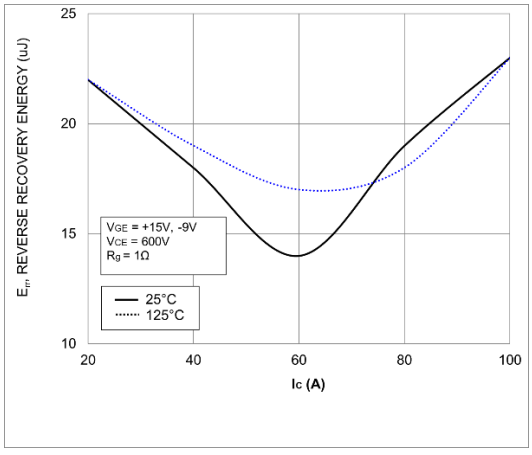

Figure 12. Typical Reverse Recovery Energy Loss vs. I_C

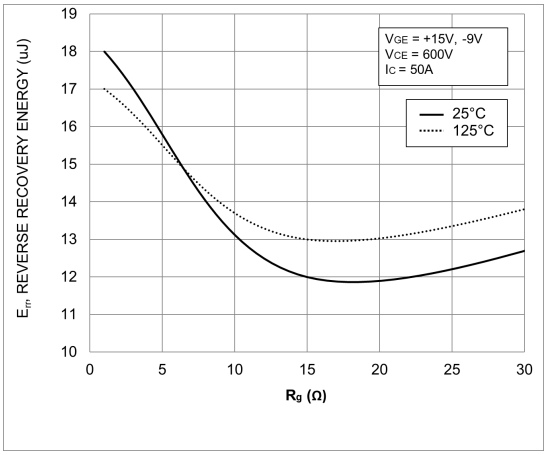

Figure 13. Typical Reverse Recovery Energy Loss vs. R_g

TYPICAL CHARACTERISTICS − IGBT, INVERSE & BYPASS DIODE AND BOOST DIODE (CONTINUED)

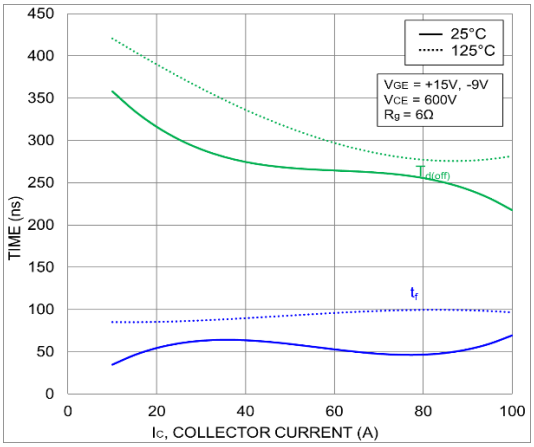

Figure 14. Typical Turn−Off Switching Time vs. I_C

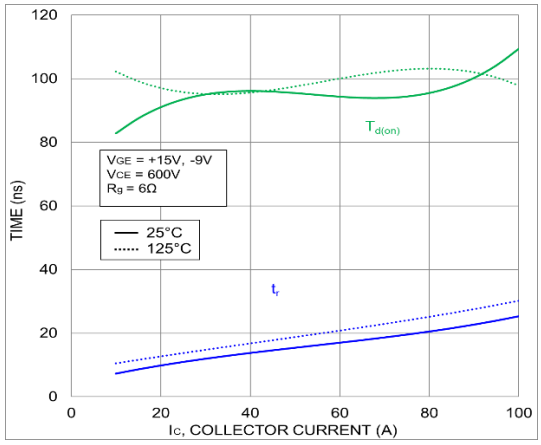

Figure 15. Typical Turn−On Switching Time vs. I_C

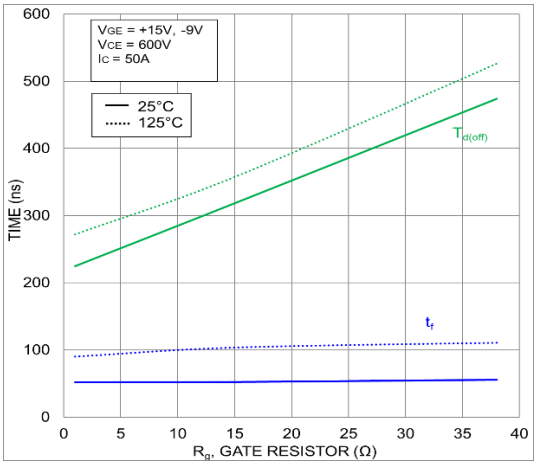

Figure 16. Typical Turn−Off Switching Time vs. Rg

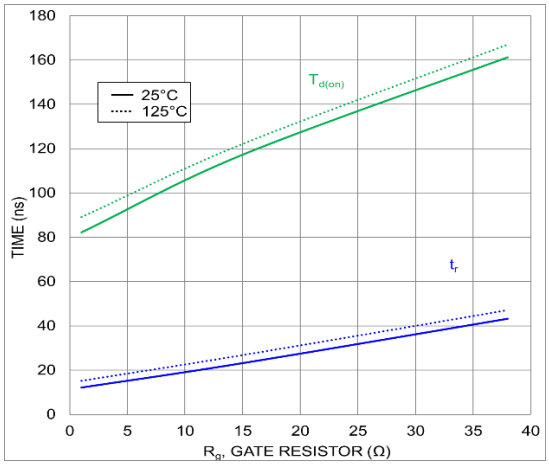

Figure 17. Typical Turn−On Switching Time vs. Rg

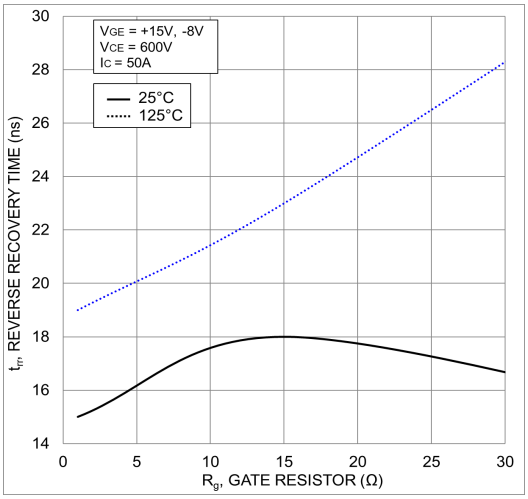

Figure 18. Typical Reverse Recovery Time vs. Rg

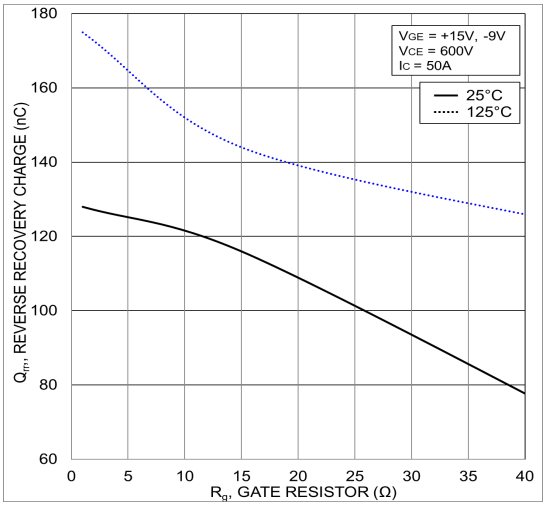

Figure 19. Typical Reverse Recovery Charge vs. Rg

TYPICAL CHARACTERISTICS − IGBT, INVERSE & BYPASS DIODE AND BOOST DIODE (CONTINUED)

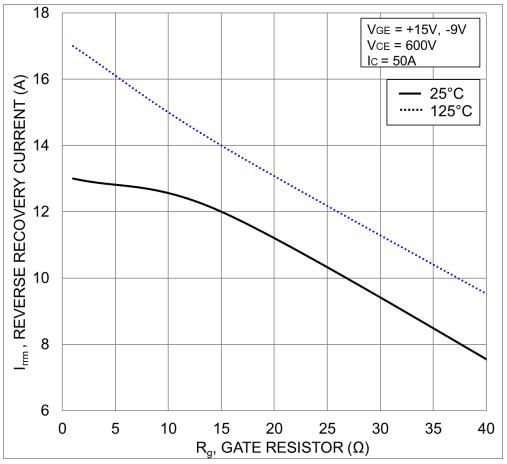

Figure 20. Typical Reverse Recovery Peak Current vs. R_g

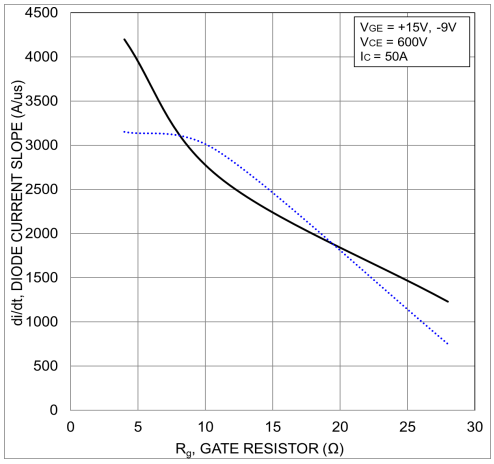

Figure 21. Typical di/dt vs. R_g

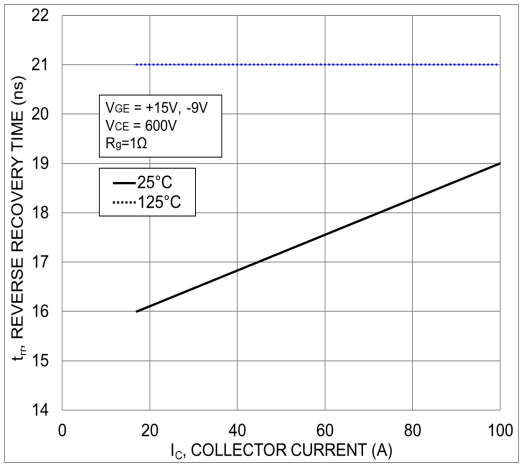

Figure 22. Typical Reverse Recovery Time vs. I_C

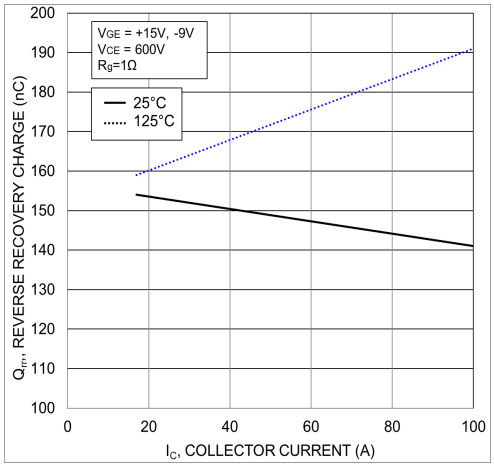

Figure 23. Typical Reverse Recovery Charge vs. I_C

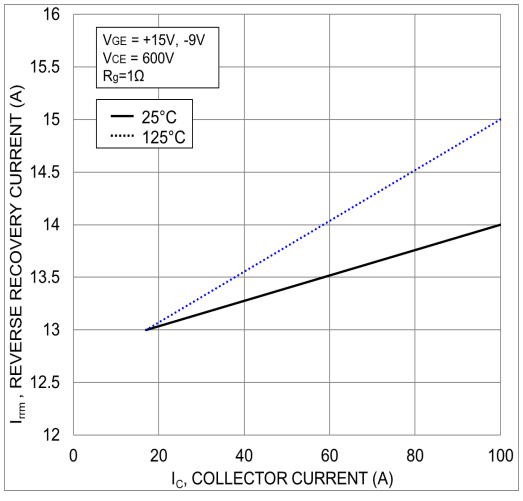

Figure 24. Typical Reverse Recovery Current vs. I_C

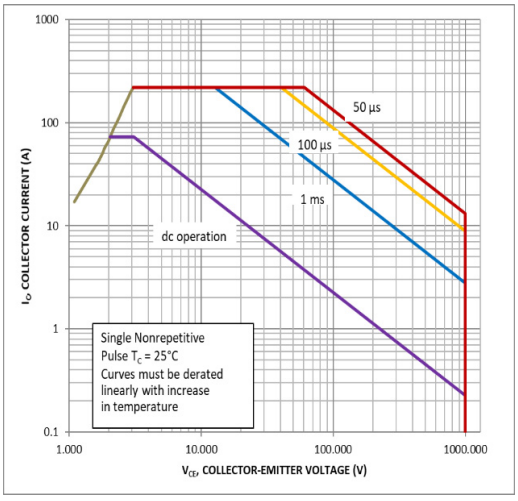

Figure 25. FBSOA

TYPICAL CHARACTERISTICS − IGBT, INVERSE & BYPASS DIODE AND BOOST DIODE (CONTINUED)

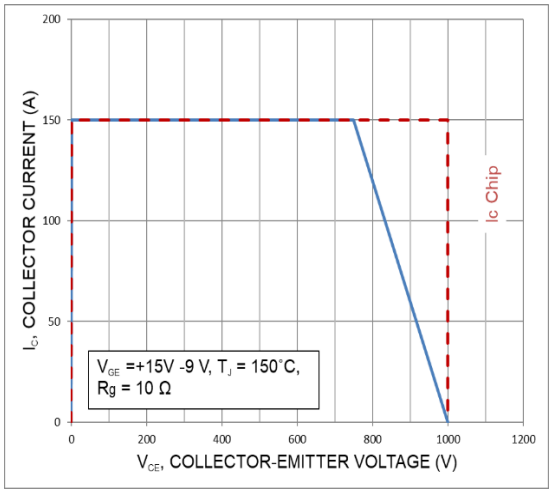

Figure 26. RBSOA

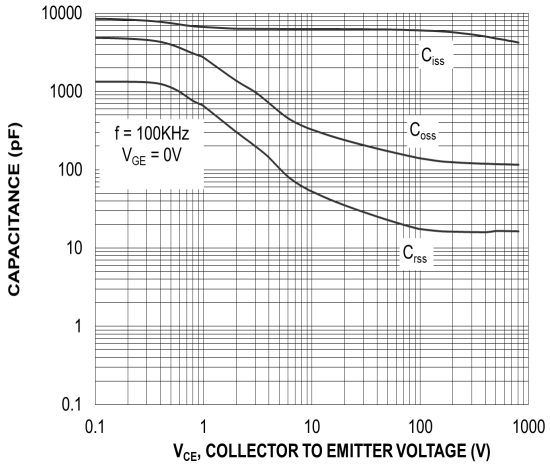

Figure 27. Capacitance Charge

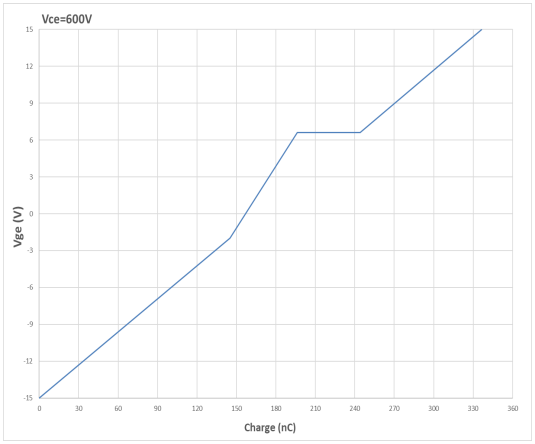

Figure 28. Gate Voltage vs. Gate Charge

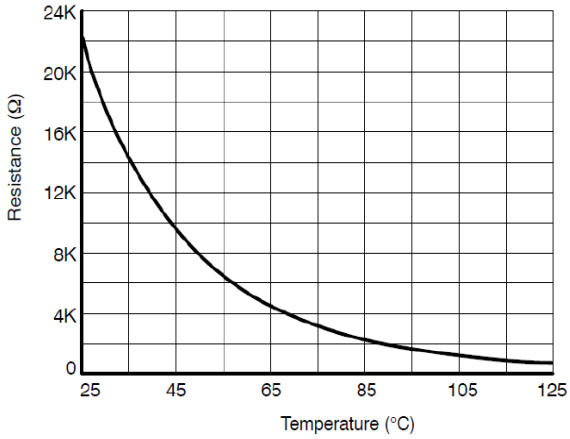

Figure 29. NTC Characteristics

TYPICAL CHARACTERISTICS − IGBT, INVERSE & BYPASS DIODE AND BOOST DIODE (CONTINUED)

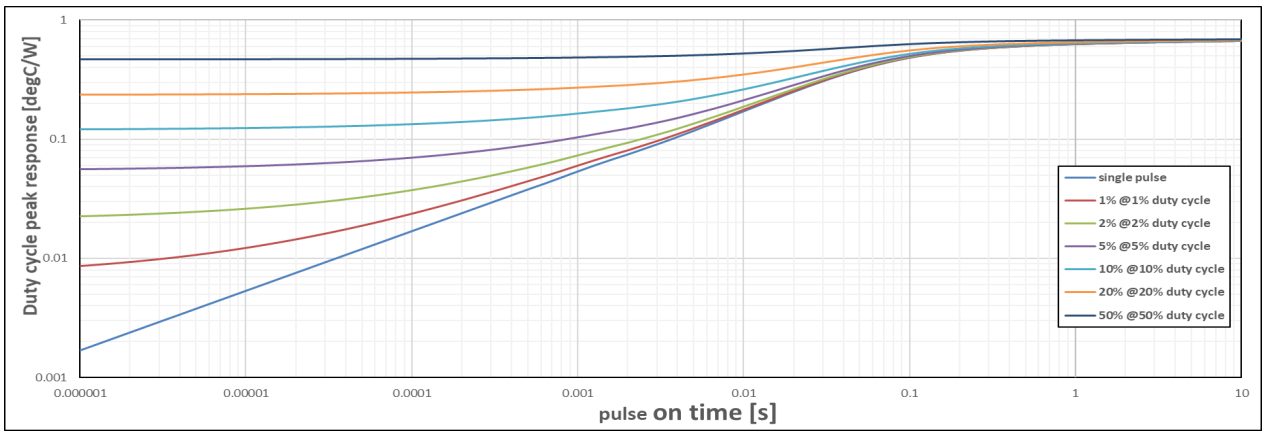

Figure 30. Transient Thermal Impedance (IGBT)

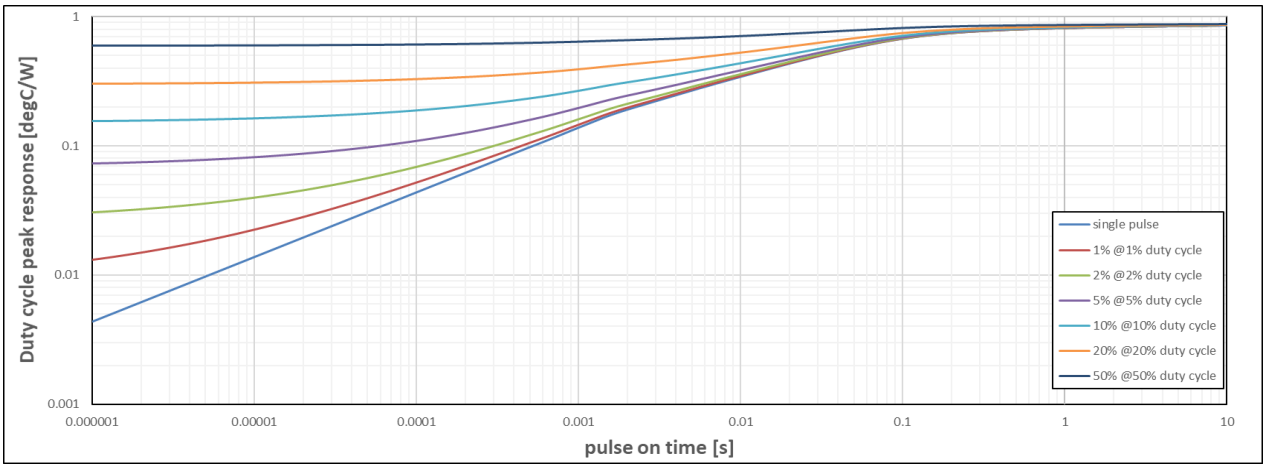

Figure 31. Transient Thermal Impedance (BOOST DIODE)

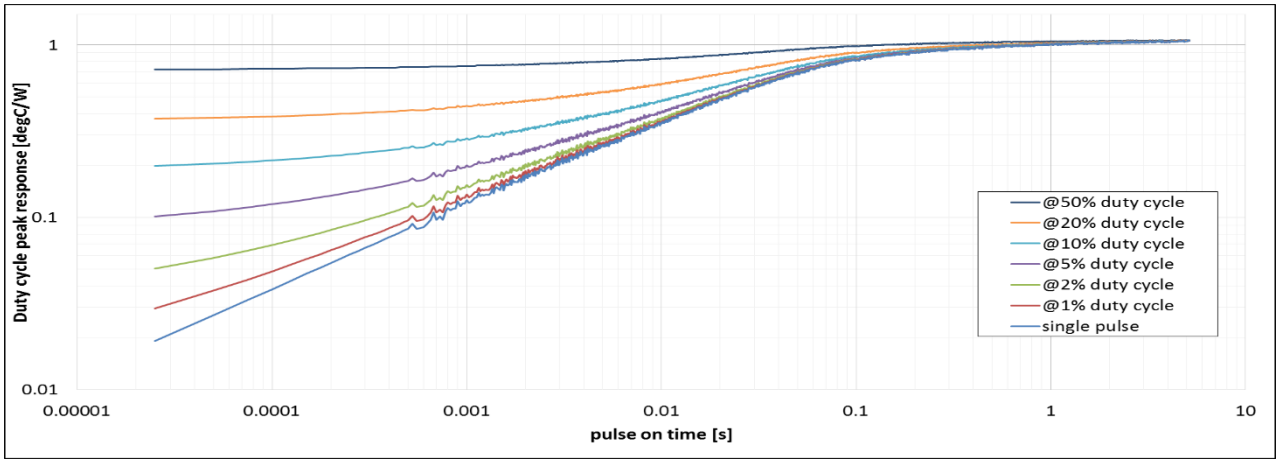

Figure 32. Transient Thermal Impedance (INVERSE&BYPASS DIODE)

ORDERING INFORMATION

Orderable Part Number	Marking	Package	Shipping
NXH300B100H4Q2F2PG PRESS FIT PINS	NXH300B100H4Q2F2PG	Q2BOOST − PIM53, 93x47 (PRESSFIT) (Pb−Free and Halide−Free Press Fit Pins)	12 Units / Blister Tray
NXH300B100H4Q2F2SG, NXH300B100H4Q2F2SG−R SOLDER PINS	NXH300B100H4Q2F2SG, NXH300B100H4Q2F2SG−R	Q2BOOST − PIM53, 93x47 (SOLDER PIN) (Pb−Free and Halide−Free Solder Pins)	12 Units / Blister Tray

PIM53, 93x47 (PRESSFIT)
CASE 180CB
ISSUE O

DATE 30 APR 2020



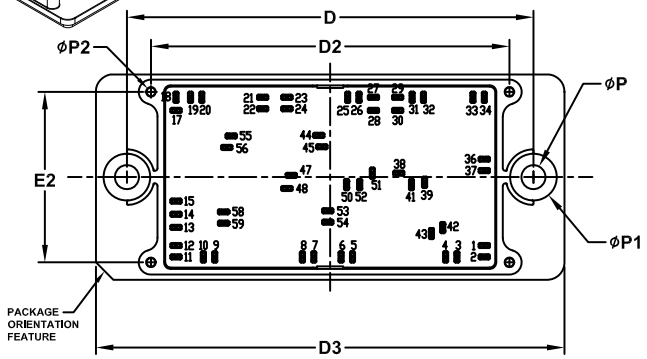

TOP VIEW



END VIEW

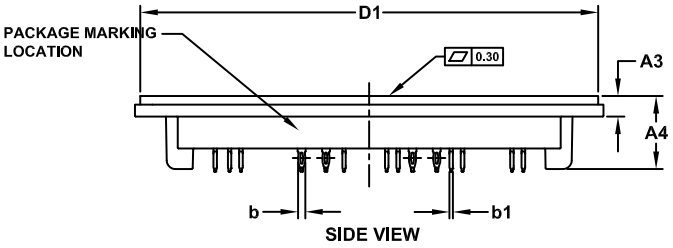

SIDE VIEW

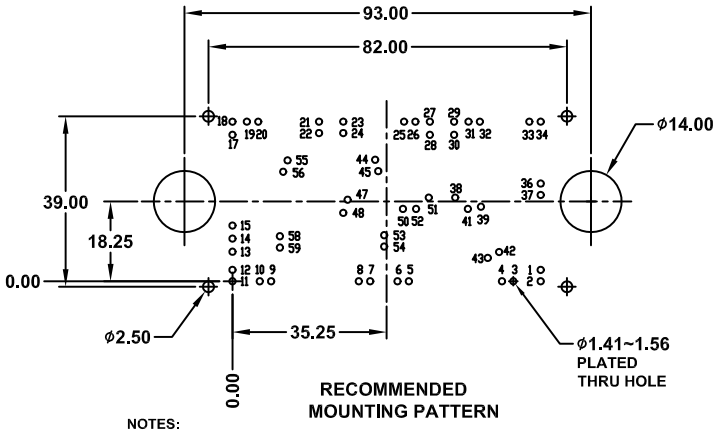

RECOMMENDED
MOUNTING PATTERN

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	16.90	17.30	17.70
A1	13.97	14.18	14.39
A2	11.70	12.00	12.30
A3	4.40	4.70	5.00
A4	16.40	16.70	17.00
b	1.61	1.66	1.71
b1	0.75	0.80	0.85
D	92.90	93.00	93.10
D1	104.45	104.75	105.05
D2	81.80	82.00	82.20
D3	106.90	107.20	107.50
E	46.70	47.00	47.30
E1	44.10	44.40	44.70
E2	38.80	39.00	39.20
P	5.40	5.50	5.60
P1	10.60	10.70	10.80
P2	1.80	2.00	2.20

NOTE 4

PIN	PIN POSITION		PIN	PIN POSITION	
	X	Y		X	Y
1	70.50	2.60	29	50.70	36.50
2	70.50	0.00	30	50.70	33.50
3	64.25	0.00	31	54.00	36.50
4	61.65	0.00	32	56.60	36.50
5	40.35	0.00	33	67.90	36.50
6	37.75	0.00	34	70.50	36.50
7	31.50	0.00	36	70.50	22.35
8	28.90	0.00	37	70.50	19.75
9	8.85	0.00	38	50.95	19.15
10	6.25	0.00	39	56.85	17.05
11	0.00	0.00	41	53.85	16.55
12	0.00	2.60	42	61.00	6.70
13	0.00	6.75	43	58.40	5.35
14	0.00	9.75	44	32.65	27.80
15	0.00	12.75	45	33.35	25.20
17	0.00	33.50	47	26.35	18.65
18	0.00	36.50	48	25.35	15.65
19	3.30	36.50	50	39.00	16.55
20	5.90	36.50	51	44.90	19.15
21	19.80	36.50	52	42.00	16.55
22	19.80	33.90	53	34.70	10.55
23	25.35	36.50	54	34.70	7.95
24	25.35	33.90	55	12.60	27.65
25	39.25	36.50	56	11.60	25.05
26	41.85	36.50	58	10.85	10.30
27	45.15	36.50	59	10.85	7.70
28	45.15	33.50			

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009
2. CONTROLLING DIMENSION : MILLIMETERS
3. DIMENSIONS b AND b1 APPLY TO THE PLATED TERMINALS AND ARE MEASURED AT DIMENSION A1
4. PIN POSITION TOLERANCE IS ± 0.4mm
5. PACKAGE MARKING IS LOCATED AS SHOWN ON THE SIDE OPPOSITE THE PACKAGE ORIENTATION FEATURES

GENERIC
MARKING DIAGRAM*

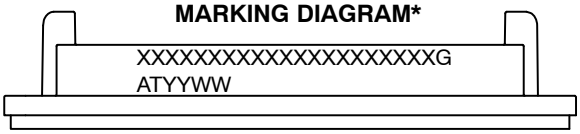

XXXXX = Specific Device Code
G = Pb−Free Package
AT = Assembly & Test Site Code
YYWW= Year and Work Week Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON20720H	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	PIM53 93X47 (PRESS FIT)	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

PIM53, 93x47 (SOLDER PIN)
CASE 180CC
ISSUE O

DATE 04 MAY 2020



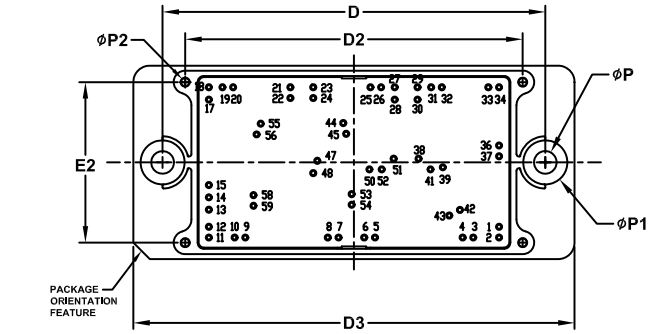

TOP VIEW



END VIEW

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	16.80	17.20	17.60
A2	11.70	12.00	12.30
A3	4.40	4.70	5.00
A4	16.40	16.70	17.00
b	0.95	1.00	1.05
D	92.90	93.00	93.10
D1	104.45	104.75	105.05
D2	81.80	82.00	82.20
D3	106.90	107.20	107.50
E	46.70	47.00	47.30
E1	44.10	44.40	44.70
E2	38.80	39.00	39.20
P	5.40	5.50	5.60
P1	10.60	10.70	10.80
P2	1.80	2.00	2.20

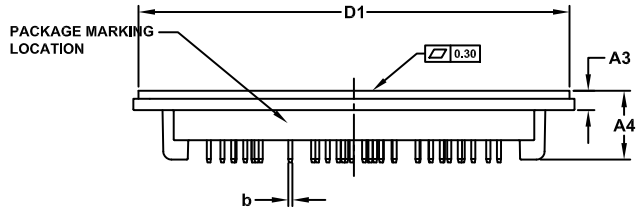

SIDE VIEW

NOTE 4

PIN	PIN POSITION		PIN	PIN POSITION	
	X	Y		X	Y
1	70.50	2.60	29	50.70	36.50
2	70.50	0.00	30	50.70	33.50
3	64.25	0.00	31	54.00	36.50
4	61.65	0.00	32	56.60	36.50
5	40.35	0.00	33	67.90	36.50
6	37.75	0.00	34	70.50	36.50
7	31.50	0.00	36	70.50	22.35
8	28.90	0.00	37	70.50	19.75
9	8.85	0.00	38	50.95	19.15
10	6.25	0.00	39	56.85	17.05
11	0.00	0.00	41	53.85	16.55
12	0.00	2.60	42	61.00	6.70
13	0.00	6.75	43	58.40	5.35
14	0.00	9.75	44	32.65	27.80
15	0.00	12.75	45	33.35	25.20
17	0.00	33.50	47	26.35	18.65
18	0.00	36.50	48	25.35	15.65
19	3.30	36.50	50	39.00	16.55
20	5.90	36.50	51	44.90	19.15
21	19.80	36.50	52	42.00	16.55
22	19.80	33.90	53	34.70	10.55
23	25.35	36.50	54	34.70	7.95
24	25.35	33.90	55	12.60	27.65
25	39.25	36.50	56	11.60	25.05
26	41.85	36.50	58	10.85	10.30
27	45.15	36.50	59	10.85	7.70
28	45.15	33.50			

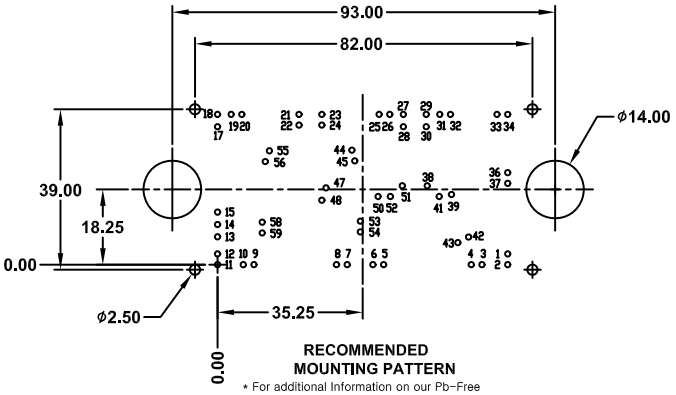

RECOMMENDED
MOUNTING PATTERN

* For additional Information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009
2. CONTROLLING DIMENSION : MILLIMETERS
3. DIMENSIONS b AND b1 APPLY TO THE PLATED TERMINALS AND ARE MEASURED AT DIMENSION A1
4. PIN POSITION TOLERANCE IS ± 0.4mm
5. PACKAGE MARKING IS LOCATED AS SHOWN ON THE SIDE OPPOSITE THE PACKAGE ORIENTATION FEATURES

GENERIC MARKING DIAGRAM*



XXXXX = Specific Device Code
G = Pb−Free Package
AT = Assembly & Test Site Code
YYWW= Year and Work Week Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON20721H**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**PIM53 93X47 (SOLDER PIN)**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.