TEXAS INSTRUMENTS
TPS7B83-Q1
SBVS376 – NOVEMBER 2020

TPS7B83-Q1 150-mA, 40-V, Low-Dropout Regulator

1 Features

- AEC-Q100 qualified for automotive applications:
  - Temperature grade 1: –40°C to +125°C, T_A
  - Junction temperature: –40°C to +150°C, T_J
- Input voltage range: 3 V to 40 V (42 V max)
- Output voltage range: 3.3 V and 5 V (fixed)
- Output current: up to 150 mA
- Output voltage accuracy: ±1% (max)
- Low dropout voltage:
  - 230 mV (max) at 150 mA (V_{OUT} ≥ 3.3 V)
- Low quiescent current:
  - 18 µA (typ)
- Excellent line transient response:
  - ±2% V_{OUT} deviation during cold-crank
  - ±2% V_{OUT} deviation (1-V/µs V_{IN} slew rate)
- Stable with a 2.2-µF or larger capacitor
- Functional Safety-Capable
  - Documentation available to aid functional safety system design
- Package: 3-pin SOT-223

2 Applications

- Reconfigurable instrument clusters
- Body control modules (BCM)
- Always-on battery-connected applications:
  - Automotive gateways
  - Remote keyless entries (RKE)

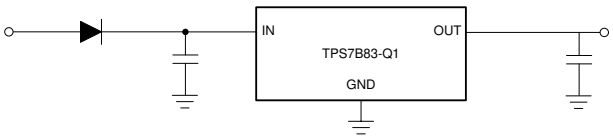

Typical Application Schematic

3 Description

The TPS7B83-Q1 is a low-dropout linear regulator designed to connect to the battery in automotive applications. The device has an input voltage range extending to 40 V, which allows the device to withstand transients (such as load dump) that are anticipated in automotive systems. With only an 18-µA quiescent current, the device is an optimal solution for powering always-on components such as microcontrollers (MCUs) and controller area network (CAN) transceivers in standby systems.

The device has state-of-the-art transient response that allows the output to quickly react to changes in load or line (for example, during cold-crank conditions). Additionally, the device has a novel architecture that minimizes output overshoot when recovering from dropout. During normal operation, the device has a tight DC accuracy of ±1% over line, load, and temperature.

Device Information(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS7B83-Q1	SOT-223 (3)	6.50 mm × 3.50 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

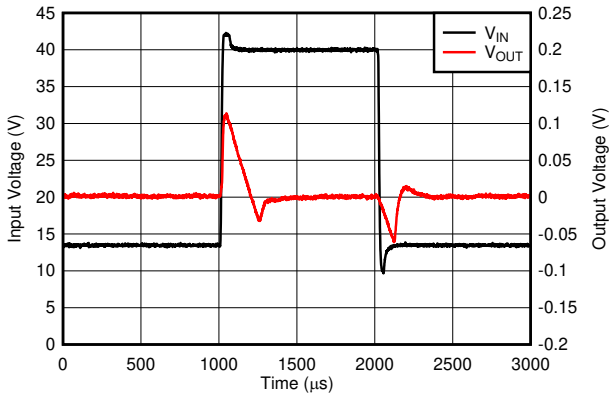

Line Transient Response (3-V/µs V_{IN} Slew Rate)

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features....1
2 Applications....1
3 Description....1
4 Revision History....2
5 Pin Configuration and Functions....3
6 Specifications....3
6.1 Absolute Maximum Ratings....3
6.2 ESD Ratings....3
6.3 Recommended Operating Conditions....4
6.4 Thermal Information....4
6.5 Electrical Characteristics....4
6.6 Typical Characteristics....6
7 Detailed Description....12
7.1 Overview....12
7.2 Functional Block Diagram....12
7.3 Feature Description....13
7.4 Device Functional Modes....14
8 Application and Implementation....15
8.1 Application Information....15
8.2 Typical Application....19
9 Power Supply Recommendations....20
10 Layout....21
10.1 Layout Guidelines....21
10.2 Layout Example....21
11 Device and Documentation Support....22
11.1 Device Support....22
11.2 Receiving Notification of Documentation Updates....22
11.3 Support Resources....22
11.4 Trademarks....22
11.5 Electrostatic Discharge Caution....22
11.6 Glossary....22
12 Mechanical, Packaging, and Orderable Information....22

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
November 2020	*	Initial release.

Copyright © 2021 Texas Instruments Incorporated

5 Pin Configuration and Functions

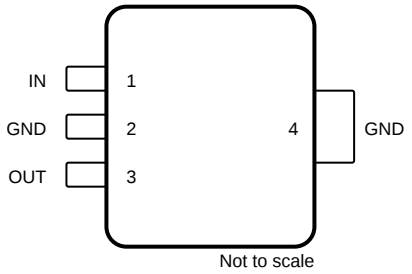

Figure 5-1. DCY Package, 3-Pin SOT-223, Top View

Table 5-1. Pin Functions

PIN		TYPE[1]	DESCRIPTION
NAME	DCY		
GND	2, 4	G	Ground pin. Connect this pin to the thermal pad with a low-impedance connection.
IN	1	P	Input power-supply voltage pin. For best transient response and to minimize input impedance, use the recommended value or larger ceramic capacitor from IN to ground, as listed in the *Recommended Operating Conditions* table and the *Input Capacitor* section. Place the input capacitor as close to the input of the device as possible.
OUT	3	O	Regulated output voltage pin. A capacitor is required from OUT to ground for stability. For best transient response, use the nominal recommended value or larger ceramic capacitor from OUT to ground; see the *Recommended Operating Conditions* table and the *Output Capacitor* section. Place the output capacitor as close to output of the device as possible. If using a high ESR capacitor, decouple the output with a 100-nF ceramic capacitor.

(1) I = input; O = output; P = power; G = ground.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)[1]

		MIN	MAX	UNIT
IN	Unregulated input	–0.3	42	V
OUT	Regulated output	–0.3	V_{IN} + 0.3[2]	V
T_A	Operating ambient temperature	–40	125	°C
T_J	Operating junction temperature	–40	150	°C
T_{stg}	Storage temperature	–65	150	°C

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* isnot implied. Exposure to absolute-maximum-rated conditions for extended periods may affect devicereliability.
(2) The absolute maximum rating is V_{IN} + 0.3 V or 20 V, whichever is smaller.

6.2 ESD Ratings

				VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002[1]		±2000	V
		Charged-device model (CDM), per AEC Q100-011	All pins	±500	
			Corner pins	±750	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordancewith the ANSI/ESDA/JEDEC JS-001 specification.

Copyright © 2021 Texas Instruments Incorporated

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V_{IN}	Input voltage	3		40	V
V_{OUT}	Output voltage	1.2		18	V
I_{OUT}	Output current	0		150	mA
C_{OUT}	Output capacitor(2)	2.2		220	µF
ESR	Output capacitor ESR requirements(3)	0.001		2	Ω
C_{IN}	Input capacitor(1)	0.1	1		µF
T_J	Operating junction temperature	–40		150	°C

(1) For robust EMI performance the minimum input capacitance is 500 nF.
(2) Effective output capacitance of 1 µF minimum required for stability.
(3) If using a large ESR capacitor it is recommended to decouple this with a 100-nF ceramic capacitor to improve transient performance.

6.4 Thermal Information

THERMAL METRIC(1) (2)		TPS7B83-Q1 DCY 3 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance(3)	77.1	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	41.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	11.7	°C/W
ψ_{JT}	Junction-to-top characterization parameter	3.3	°C/W
ψ_{JB}	Junction-to-board characterization parameter	11.5	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	11.5	°C/W

(1) The thermal data is based on the JEDEC standard high K profile,JESD 51-7. Two-signal, two-plane, four-layer board with 2-oz. copper. The copper pad is soldered tothe thermal land pattern. Also, correct attachment procedure must be incorporated.
(2) For more information about traditional and new thermal metrics,see the Semiconductor and IC PackageThermal Metrics application report.
(3) The 1s0p $R_{\theta JA}$ is 154.6°C/W for the DCY package.

6.5 Electrical Characteristics

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 0 mA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, C_{IN} = 1 µF typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{OUT}	Regulated output accuracy DCY	V_{IN} = V_{OUT} + 500 mV to 40 V, I_{OUT} = 100 µA to 150 mA (1)	T_J = 25ºC	–0.75		0.75	%
			T_J = –40°C to +150ºC	–1		1	
$\Delta V_{OUT(\Delta VIN)}$	Line regulation	Change in percent of output voltage	V_{IN} = V_{OUT} + 500 mV to 40 V, I_{OUT} = 100 µA			0.2	%
$\Delta V_{OUT(\Delta IOUT)}$	Load regulation	Change in percent of output voltage	V_{IN} = V_{OUT} + 500 mV, I_{OUT} = 100 µA to 150 mA			0.2	
ΔV_{OUT}	Load transient response settling time(2) (3)	C_{OUT} = 10 µF	C_{OUT} = 10 µF			100	µs
	Load transient response overshoot, undershoot(3)		I_{OUT} = 45 mA to 105 mA	–2%		10%	%V_{OUT}
			I_{OUT} = 0 mA to 150 mA	–10%			

Copyright © 2021 Texas Instruments Incorporated

6.5 Electrical Characteristics (continued)

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 0 mA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, C_{IN} = 1 µF typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
I_Q	Quiescent current	V_{IN} = V_{OUT} + 500 mV to 40 V, I_{OUT} = 0 mA	T_J = 25ºC		18	21	µA
			T_J = –40°C to +150ºC			26	
		I_{OUT} = 500 µA	T_J = –40°C to +150ºC			35	
V_{DO}	Dropout voltage	I_{OUT} ≤ 1 mA, V_{OUT} ≥ 3.3 V, V_{IN} = $V_{OUT(NOM)}$ x 0.95				47	mV
		I_{OUT} = 105 mA, V_{OUT} ≥ 3.3 V, V_{IN} = $V_{OUT(NOM)}$			130	180	
		I_{OUT} = 150 mA, V_{OUT} ≥ 3.3 V, V_{IN} = $V_{OUT(NOM)}$			160	230	
$V_{UVLO(RISING)}$	Rising input supply UVLO	V_{IN} rising		2.6	2.7	2.82	V
$V_{UVLO(FALLING)}$	Falling input supply UVLO	V_{IN} falling		2.38	2.5	2.6	V
$V_{UVLO(HYST)}$	V_{UVLO} hysteresis				230		mV
I_{CL}	Output current limit	V_{IN} = $V_{OUT(nom)}$ + 1 V, V_{OUT} short to 90% x $V_{OUT(NOM)}$		180	220	260	mA
PSRR	Power-supply ripple rejection	V_{IN} - V_{OUT} = 500 mV, frequency = 1 kHz, I_{OUT} = 150 mA			55		dB
V_n	Output noise voltage	V_{OUT} = 3.3 V, BW = 10 Hz to 100 kHz			280		μV_{RMS}
$T_{SD(SHUTDOWN)}$	Junction shutdown temperature				175		°C
$T_{SD(HYST)}$	Hysteresis of thermal shutdown				20		°C

(1) Power dissipation is limited to 2W for IC production testing purposes. The power dissipation can be higher during normal operation. Please see the thermal dissipation section for more information on how much power the device can dissipate while maintaining a junction temperature below 150°C.
(2) The settling time is measured from when I_{OUT} is stepped from 45mA to 105 mA to when the output voltage recovers to V_{OUT} = $V_{OUT(nom)}$ - 5 mV.
(3) This specification is specified by design.

Copyright © 2021 Texas Instruments Incorporated

6.6 Typical Characteristics

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 100 µA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, and C_{IN} = 1 µF (unless otherwise noted)

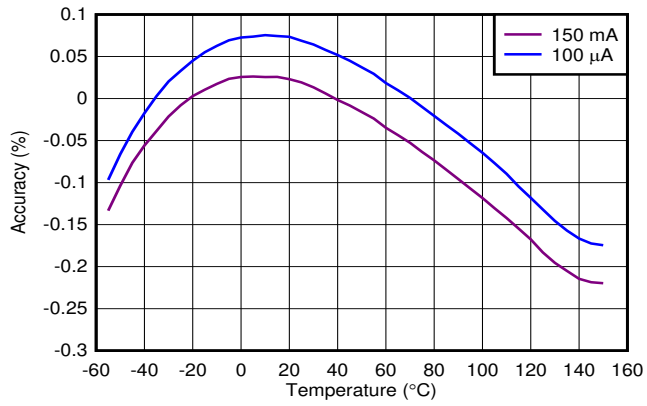

Figure 6-1. Accuracy vs Temperature

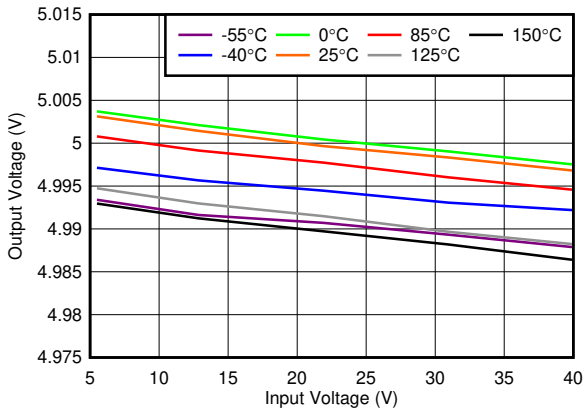

V_{OUT} = 5 V, I_{OUT} = 150 mA

Figure 6-2. Line Regulation vs V_{IN}

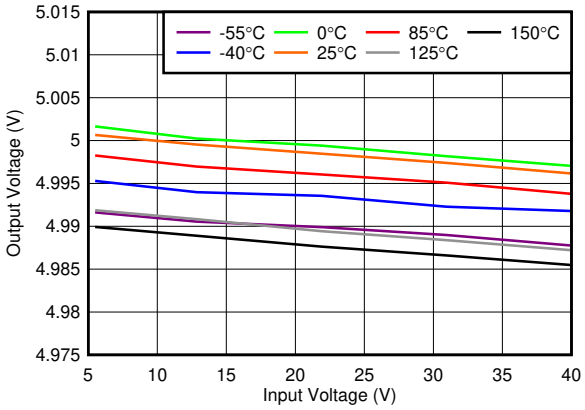

V_{OUT} = 5 V, I_{OUT} = 5 mA

Figure 6-3. Line Regulation vs V_{IN}

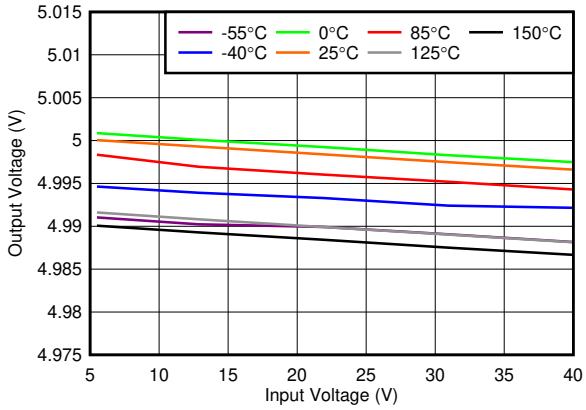

V_{OUT} = 5 V, I_{OUT} = 1 mA

Figure 6-4. Line Regulation vs V_{IN}

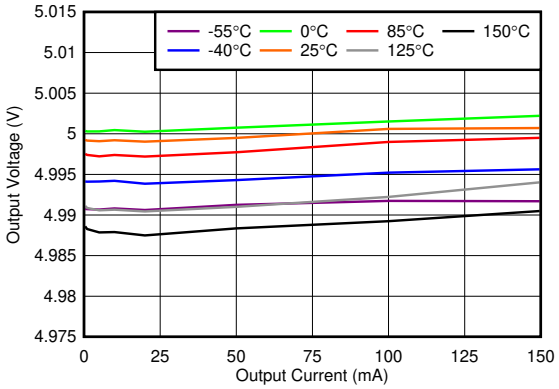

V_{OUT} = 5 V

Figure 6-5. Load Regulation vs I_{OUT}

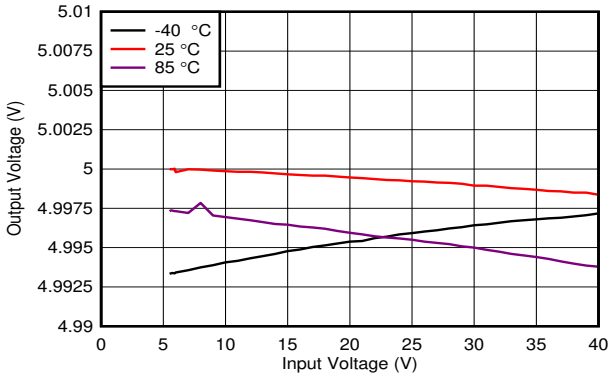

C_{OUT} = 10 µF

Figure 6-6. Line Regulation at 50 mA

Copyright © 2021 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 100 µA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, and C_{IN} = 1 µF (unless otherwise noted)

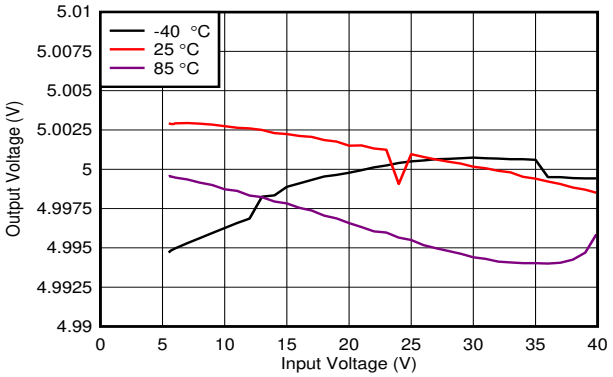

C_{OUT} = 10 µF

Figure 6-7. Line Regulation at 100 mA

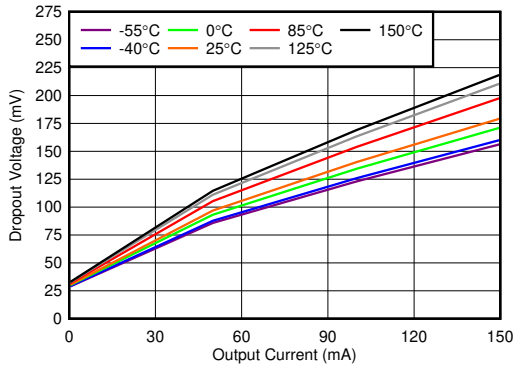

V_{IN} = 3 V

Figure 6-8. Dropout Voltage (V_{DO}) vs I_{OUT}

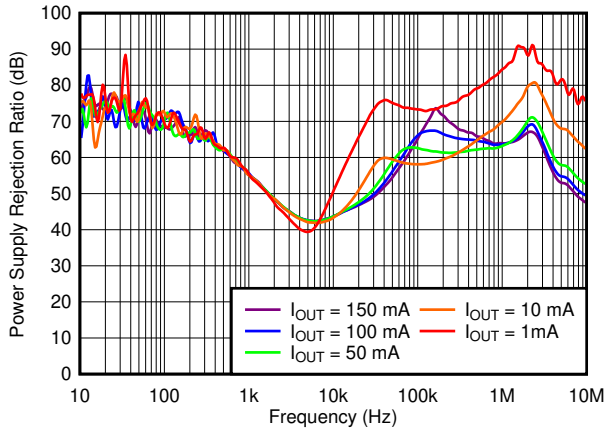

C_{OUT} = 10 µF (X7R 50 V), V_{OUT} = 5 V

Figure 6-9. PSRR vs Frequency and I_{OUT}

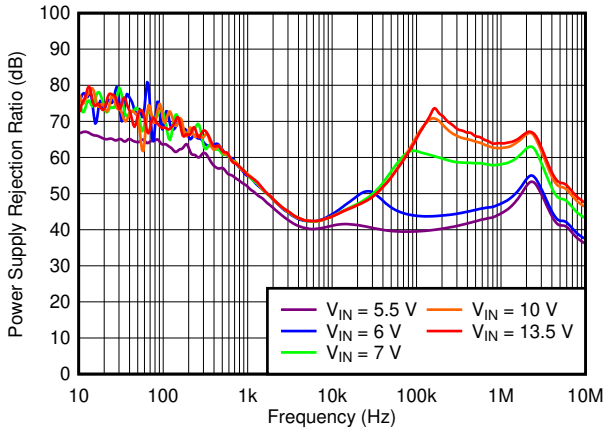

C_{OUT} = 10 µF (X7R 50 V), I_{OUT} = 150 mA, V_{OUT} = 5 V

Figure 6-10. PSRR vs Frequency and V_{IN}

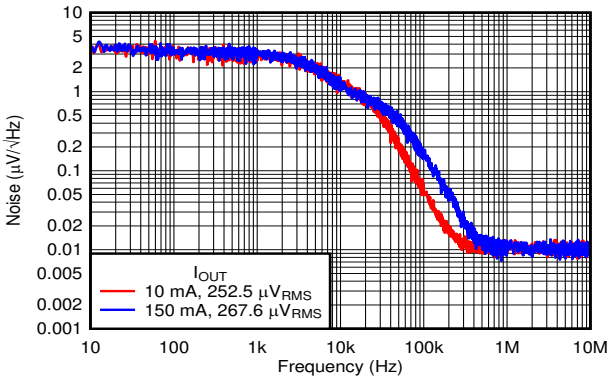

V_{OUT} = 3.3 V, C_{OUT} = 10 µF

Figure 6-11. Noise vs Frequency at 3.3 V

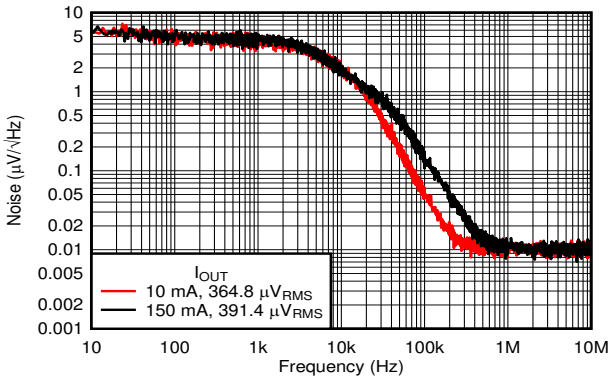

V_{OUT} = 5 V, C_{OUT} = 10 µF

Figure 6-12. Noise vs Frequency at 5.0 V

Copyright © 2021 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 100 µA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, and C_{IN} = 1 µF (unless otherwise noted)

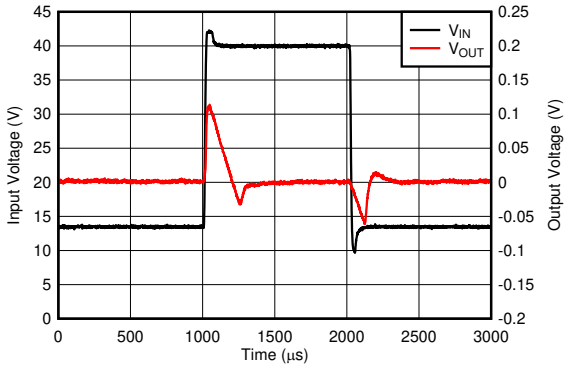

V_{OUT} = 5 V, I_{OUT} = 1 mA, V_{IN} = 13.5 V to 40 V, slew rate = 2.7 V/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-13. Line Transients at 13.5 V to 40 V

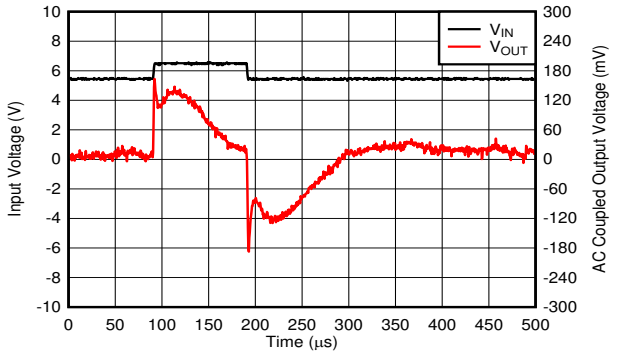

V_{OUT} = 5 V, V_{IN} = 5.5 V to 6.5 V, t_{rise} = 1 µs, C_{OUT} = 10 µF

Figure 6-14. Line Transients at 5.5 V to 6.5 V

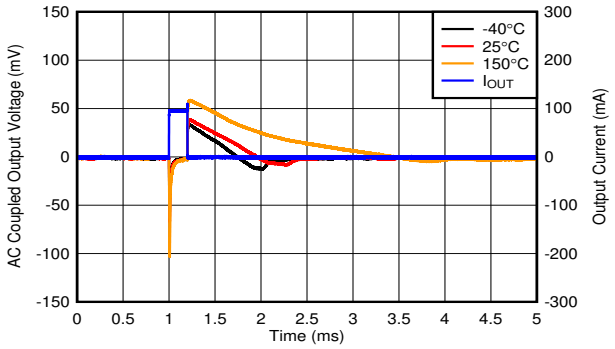

V_{OUT} = 5 V, I_{OUT} = 0 mA to 100 mA, slew rate = 1 A/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-15. Load Transient, No Load to 100 mA

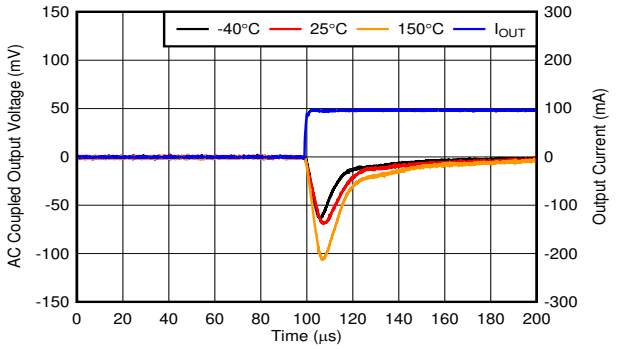

V_{OUT} = 5 V, I_{OUT} = 0 mA to 100 mA, slew rate = 1 A/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-16. Load Transient, No Load to 100-mA Rising Edge

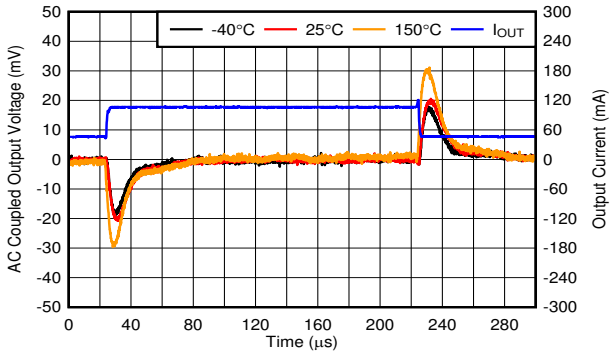

V_{OUT} = 5 V, I_{OUT} = 45 mA to 105 mA, slew rate = 0.1 A/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-17. Load Transient, 45 mA to 105 mA

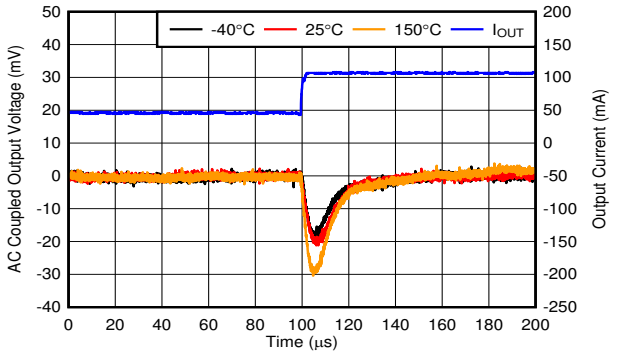

V_{OUT} = 5 V, I_{OUT} = 45 mA to 105 mA, slew rate = 0.1 A/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-18. Load Transient, 45-mA to 105-mA Rising Edge

Copyright © 2021 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 100 µA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, and C_{IN} = 1 µF (unless otherwise noted)

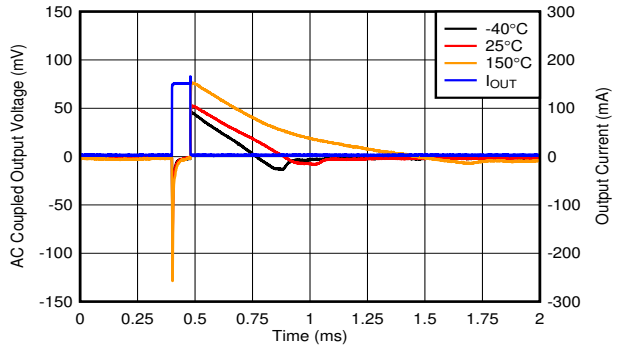

V_{OUT} = 5 V, I_{OUT} = 0 mA to 150 mA, slew rate = 1 A/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-19. Load Transient, No Load to 150 mA

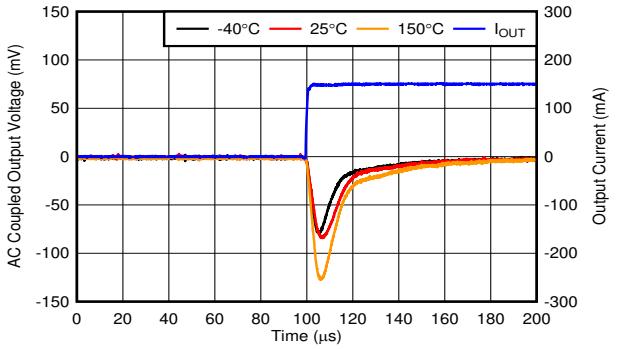

V_{OUT} = 5 V, I_{OUT} = 0 mA to 150 mA, slew rate = 1 A/µs, V_{EN} = 3.3 V, C_{OUT} = 10 µF

Figure 6-20. Load Transient, No Load to 150-mA Rising Edge

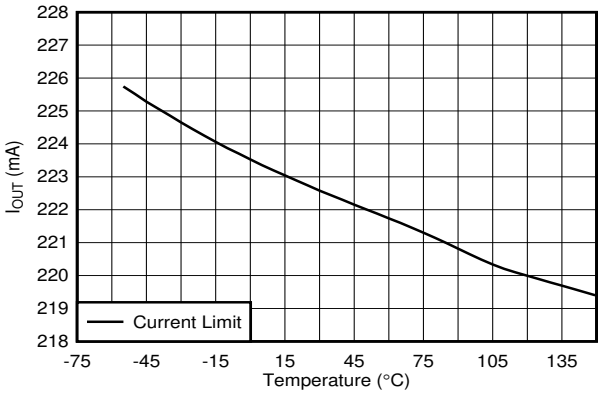

V_{IN} = V_{OUT} + 1 V, V_{OUT} = 90% × $V_{OUT(NOM)}$

Figure 6-21. Output Current Limit vs Temperature

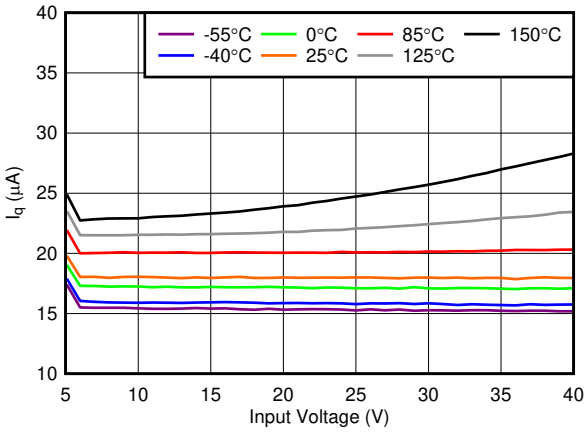

V_{OUT} = 5 V

Figure 6-22. Quiescent Current (I_Q) vs V_{IN}

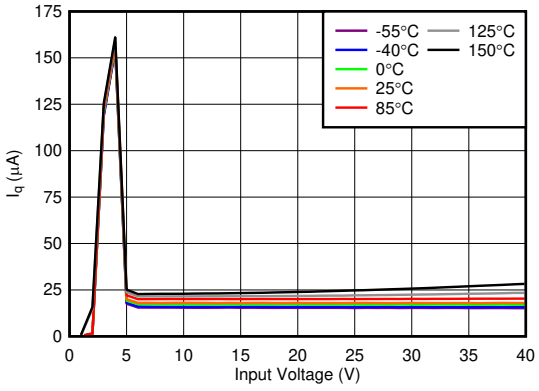

V_{OUT} = 5 V

Figure 6-23. Quiescent Current (I_Q) vs V_{IN}

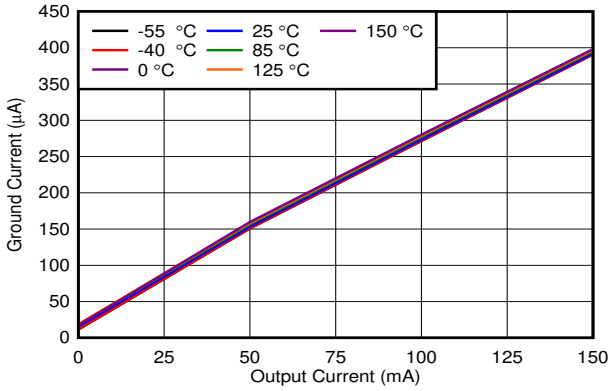

Figure 6-24. Ground Current (I_{GND}) vs I_{OUT}

6.6 Typical Characteristics (continued)

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 100 µA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, and C_{IN} = 1 µF (unless otherwise noted)

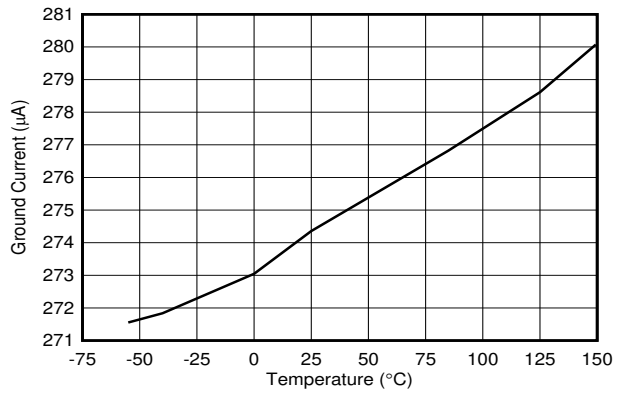

I_{OUT} = 100 mA

Figure 6-25. Ground Current

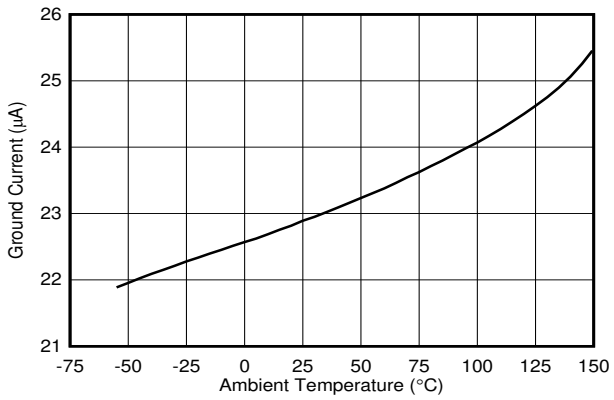

I_{OUT} = 500 µA

Figure 6-26. Ground Current

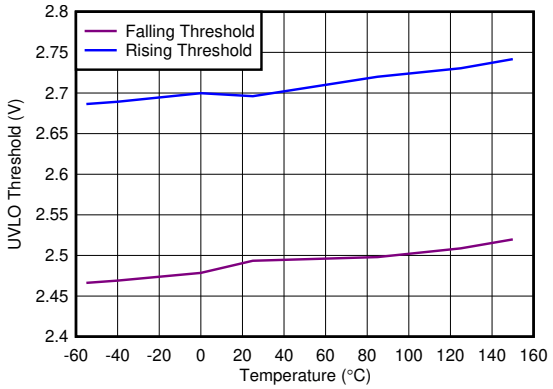

Figure 6-27. Undervoltage Lockout (UVLO) Threshold vs Temperature

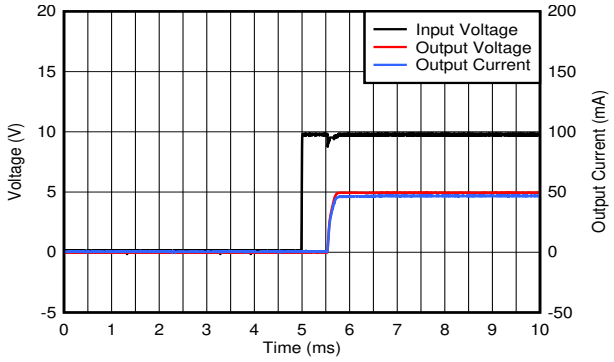

C_{OUT} = 10 µF

Figure 6-28. Startup Plot

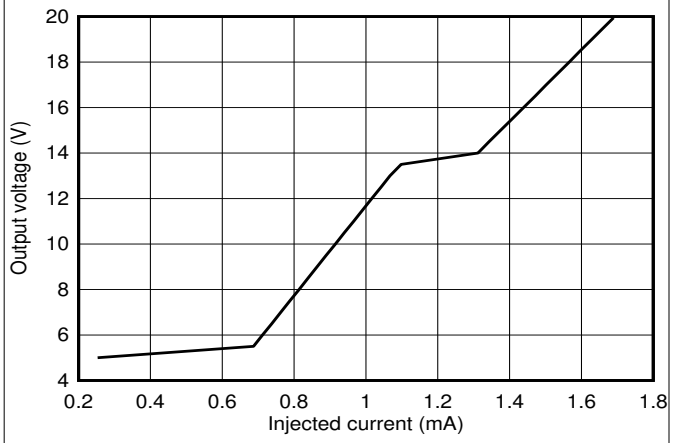

Figure 6-29. Output Voltage vs Injected Current

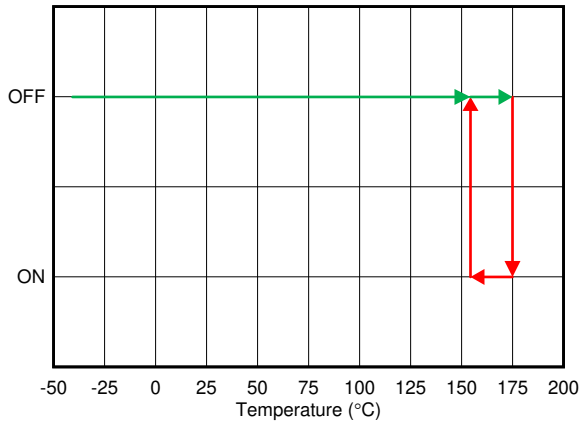

Figure 6-30. Thermal Shutdown

Copyright © 2021 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

specified at T_J = –40°C to +150°C, V_{IN} = 13.5 V, I_{OUT} = 100 µA, C_{OUT} = 2.2 µF, 1 mΩ < C_{OUT} ESR < 2 Ω, and C_{IN} = 1 µF (unless otherwise noted)

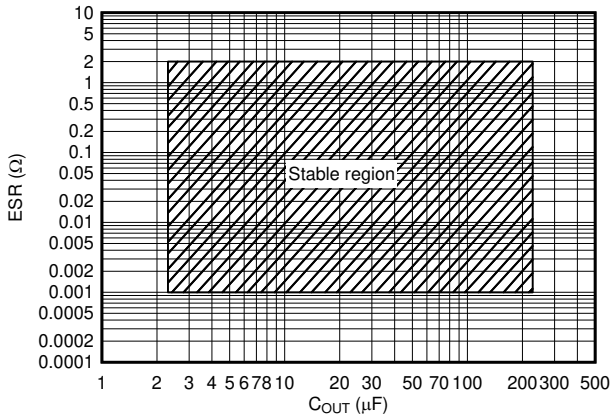

Figure 6-31. Stability ESR vs C_{OUT}

7 Detailed Description

7.1 Overview

The TPS7B83-Q1 is a low-dropout linear regulator (LDO) designed to connect to the battery in automotive applications. The device has an input voltage range extending to 40 V, which allows the device to withstand transients (such as load dumps) that are anticipated in automotive systems. With only a 18-µA quiescent current at light loads, the device is an optimal solution for powering always-on components.

The device has a state-of-the-art transient response that allows the output to quickly react to changes in the load or line (for example, during cold-crank conditions). Additionally, the device has a novel architecture that minimizes output overshoot when recovering from dropout. During normal operation, the device has a tight DC accuracy of ±1% over line, load, and temperature.

7.2 Functional Block Diagram

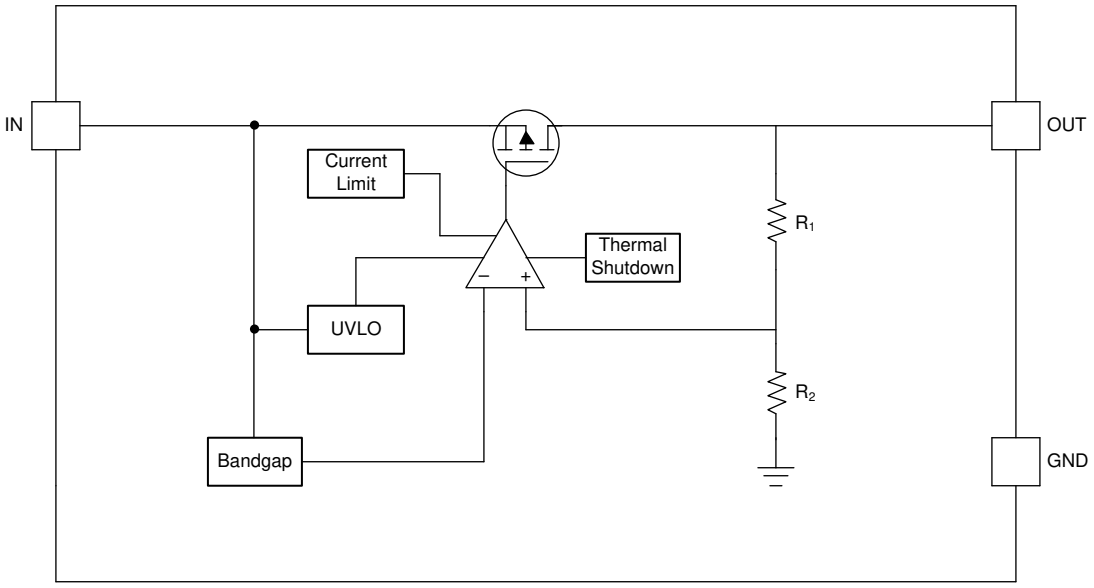

Copyright © 2021 Texas Instruments Incorporated

7.3 Feature Description

7.3.1 Undervoltage Lockout

The device has an independent undervoltage lockout (UVLO) circuit that monitors the input voltage, allowing a controlled and consistent turn on and off of the output voltage. To prevent the device from turning off if the input drops during turn on, the UVLO has hysteresis as specified in the *Electrical Characteristics* table.

7.3.2 Thermal Shutdown

The device contains a thermal shutdown protection circuit to disable the device when the junction temperature (T_J) of the pass transistor rises to $T_{SD(shutdown)}$ (typical). Thermal shutdown hysteresis assures that the device resets (turns on) when the temperature falls to $T_{SD(reset)}$ (typical).

The thermal time-constant of the semiconductor die is fairly short, thus the device may cycle on and off when thermal shutdown is reached until power dissipation is reduced. Power dissipation during startup can be high from large V_{IN} – V_{OUT} voltage drops across the device or from high inrush currents charging large output capacitors. Under some conditions, the thermal shutdown protection disables the device before startup completes.

For reliable operation, limit the junction temperature to the maximum listed in the *Recommended Operating Conditions* table. Operation above this maximum temperature causes the device to exceed its operational specifications. Although the internal protection circuitry of the device is designed to protect against thermal overall conditions, this circuitry is not intended to replace proper heat sinking. Continuously running the device into thermal shutdown or above the maximum recommended junction temperature reduces long-term reliability.

7.3.3 Current Limit

The device has an internal current limit circuit that protects the regulator during transient high-load current faults or shorting events. The current limit is a brickwall scheme. In a high-load current fault, the brickwall scheme limits the output current to the current limit (I_{CL}). I_{CL} is listed in the *Electrical Characteristics* table.

The output voltage is not regulated when the device is in current limit. When a current limit event occurs, the device begins to heat up because of the increase in power dissipation. When the device is in brickwall current limit, the pass transistor dissipates power [(V_{IN} – V_{OUT}) × I_{CL}]. If thermal shutdown is triggered, the device turns off. After the device cools down, the internal thermal shutdown circuit turns the device back on. If the output current fault condition continues, the device cycles between current limit and thermal shutdown. For more information on current limits, see the *Know Your Limits* application report.

Figure 7-1 shows a diagram of the current limit.

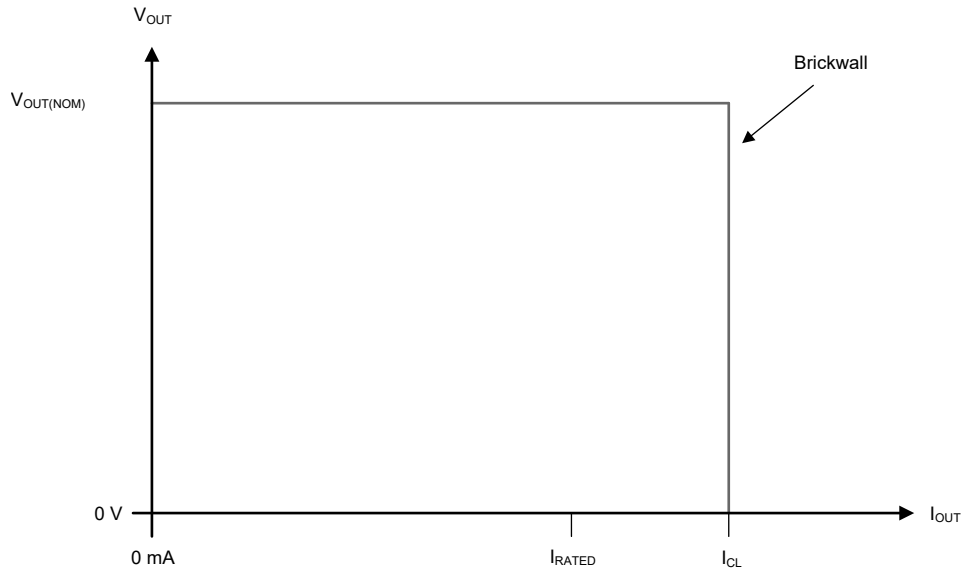

Figure 7-1. Current Limit

7.4 Device Functional Modes

7.4.1 Device Functional Mode Comparison

The *Device Functional Mode Comparison* table shows the conditions that lead to the different modes of operation. See the *Electrical Characteristics* table for parameter values.

Table 7-1. Device Functional Mode Comparison

OPERATING MODE	PARAMETER		
	V_{IN}	I_{OUT}	T_J
Normal operation	$V_{IN} > V_{OUT(nom)} + V_{DO}$ and $V_{IN} > V_{IN(min)}$	$I_{OUT} < I_{OUT(max)}$	$T_J < T_{SD(shutdown)}$
Dropout operation	$V_{IN(min)} < V_{IN} < V_{OUT(nom)} + V_{DO}$	$I_{OUT} < I_{OUT(max)}$	$T_J < T_{SD(shutdown)}$
Disabled (any true condition disables the device)	$V_{IN} < V_{UVLO}$	Not applicable	$T_J > T_{SD(shutdown)}$

7.4.2 Normal Operation

The device regulates to the nominal output voltage when the following conditions are met:

- The input voltage is greater than the nominal output voltage plus the dropout voltage ($V_{OUT(nom)} + V_{DO}$)
- The output current is less than the current limit ($I_{OUT} < I_{CL}$)
- The device junction temperature is less than the thermal shutdown temperature ($T_J < T_{SD}$)
- The enable voltage has previously exceeded the enable rising threshold voltage and has not yet decreased to less than the enable falling threshold

7.4.3 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout mode. In this mode, the output voltage tracks the input voltage. During this mode, the transient performance of the device becomes significantly degraded because the pass transistor is in the ohmic or triode region, and acts as a switch. Line or load transients in dropout can result in large output-voltage deviations.

When the device is in a steady dropout state (defined as when the device is in dropout, $V_{IN} < V_{OUT(NOM)} + V_{DO}$, directly after being in a normal regulation state, but *not* during startup), the pass transistor is driven into the ohmic or triode region. When the input voltage returns to a value greater than or equal to the nominal output voltage plus the dropout voltage ($V_{OUT(NOM)} + V_{DO}$), the output voltage can overshoot for a short period of time while the device pulls the pass transistor back into the linear region.

Copyright © 2021 Texas Instruments Incorporated

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

8.1.1 Input and Output Capacitor Selection

The TPS7B83-Q1 requires an output capacitor of 2.2 µF or larger (1 µF or larger capacitance) for stability and an equivalent series resistance (ESR) between 0.001 Ω and 2 Ω. For the best transient performance, use X5R- and X7R-type ceramic capacitors because these capacitors have minimal variation in value and ESR over temperature. When choosing a capacitor for a specific application, be mindful of the DC bias characteristics for the capacitor. Higher output voltages cause a significant derating of the capacitor. For best performance, the maximum recommended output capacitance is 220 µF.

Although an input capacitor is not required for stability, good analog design practice is to connect a capacitor from IN to GND. Some input supplies have a high impedance, thus placing the input capacitor on the input supply helps reduce the input impedance. This capacitor counteracts reactive input sources and improves transient response, input ripple, and PSRR. If the input supply has a high impedance over a large range of frequencies, several input capacitors can be used in parallel to lower the impedance over frequency. Use a higher-value capacitor if large, fast, rise-time load transients are anticipated, or if the device is located several inches from the input power source.

8.1.2 Dropout Voltage

Dropout voltage (V_{DO}) is defined as the input voltage minus the output voltage ($V_{IN} – V_{OUT}$) at the rated output current (I_{RATED}), where the pass transistor is fully on. I_{RATED} is the maximum I_{OUT} listed in the *Recommended Operating Conditions* table. The pass transistor is in the ohmic or triode region of operation, and acts as a switch. The dropout voltage indirectly specifies a minimum input voltage greater than the nominal programmed output voltage at which the output voltage is expected to stay in regulation. If the input voltage falls to less than the nominal output regulation, then the output voltage falls as well.

For a CMOS regulator, the dropout voltage is determined by the drain-source on-state resistance ($R_{DS(ON)}$) of the pass transistor. Therefore, if the linear regulator operates at less than the rated current, the dropout voltage for that current scales accordingly. The following equation calculates the $R_{DS(ON)}$ of the device.

$$R_{DS(ON)} = \frac{V_{DO}}{I_{RATED}} \quad (1)$$

8.1.3 Reverse Current

Excessive reverse current can damage this device. Reverse current flows through the intrinsic body diode of the pass transistor instead of the normal conducting channel. At high magnitudes, this current flow degrades the long-term reliability of the device.

Conditions where reverse current can occur are outlined in this section, all of which can exceed the absolute maximum rating of $V_{OUT} \leq V_{IN} + 0.3$ V.

- If the device has a large C_{OUT} and the input supply collapses with little or no load current
- The output is biased when the input supply is not established
- The output is biased above the input supply

If reverse current flow is expected in the application, external protection is recommended to protect the device. Reverse current is not limited in the device, so external limiting is required if extended reverse voltage operation is anticipated.

Copyright © 2021 Texas Instruments Incorporated

8.1.4 Power Dissipation (P_D)

Circuit reliability requires consideration of the device power dissipation, location of the circuit on the printed circuit board (PCB), and correct sizing of the thermal plane. The PCB area around the regulator must have few or no other heat-generating devices that cause added thermal stress.

To first-order approximation, power dissipation in the regulator depends on the input-to-output voltage difference and load conditions. The following equation calculates power dissipation (P_D).

$$P_D = (V_{IN} – V_{OUT}) \times I_{OUT} \quad (2)$$

Note

Power dissipation can be minimized, and therefore greater efficiency can be achieved, by correct selection of the system voltage rails. For the lowest power dissipation use the minimum input voltage required for correct output regulation.

For devices with a thermal pad, the primary heat conduction path for the device package is through the thermal pad to the PCB. Solder the thermal pad to a copper pad area under the device. This pad area must contain an array of plated vias that conduct heat to additional copper planes for increased heat dissipation.

The maximum power dissipation determines the maximum allowable ambient temperature (T_A) for the device. According to the following equation, power dissipation and junction temperature are most often related by the junction-to-ambient thermal resistance ($R_{\theta JA}$) of the combined PCB and device package and the temperature of the ambient air (T_A).

$$T_J = T_A + (R_{\theta JA} \times P_D) \quad (3)$$

Thermal resistance ($R_{\theta JA}$) is highly dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The junction-to-ambient thermal resistance listed in the *Thermal Information* table is determined by the JEDEC standard PCB and copper-spreading area, and is used as a relative measure of package thermal performance.

8.1.4.1 Thermal Performance Versus Copper Area

The most used thermal resistance parameter, $R_{\theta JA}$, is highly dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The $R_{\theta JA}$ recorded in the *Thermal Information* table in the *Specifications* section is determined by the JEDEC standard (see Figure 8-1), PCB, and copper-spreading area, and is only used as a relative measure of package thermal performance. For a well-designed thermal layout, $R_{\theta JA}$ is actually the sum of the package junction-to-case (bottom) thermal resistance ($R_{\theta JCbot}$) plus the thermal resistance contribution by the PCB copper.

Copyright © 2021 Texas Instruments Incorporated

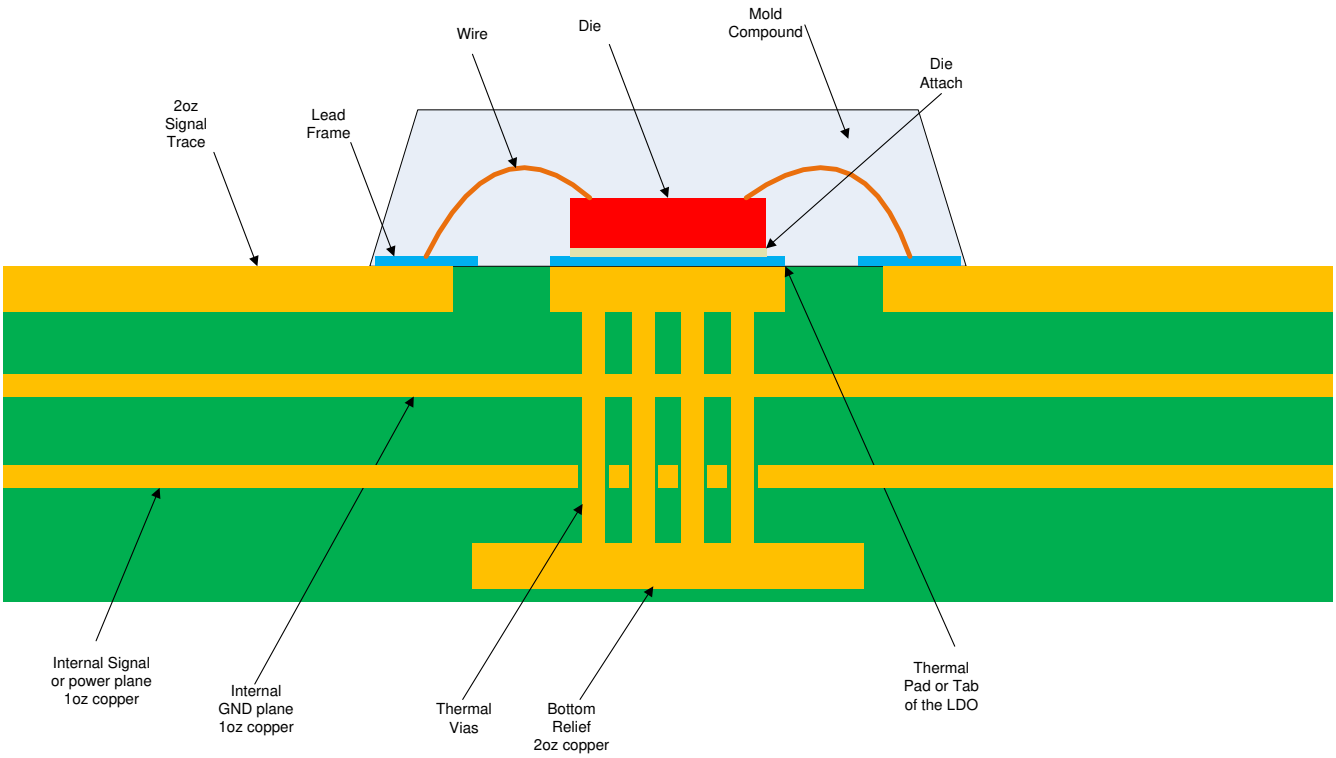

Figure 8-1. JEDEC Standard 2s2p PCB

Figure 8-2 and Figure 8-3 depict the functions of $R_{\theta JA}$ and ψ_{JB} versus copper area and thickness. These plots are generated with a 101.6-mm x 101.6-mm x 1.6-mm PCB of two and four layers. For the four-layer board, the inner planes use a 1-oz copper thickness. Outer layers are simulated with both a 1-oz and 2-oz copper thickness. A 4 x 4 array of thermal vias of 300-µm drill diameter and 25-µm Cu plating is located beneath the thermal pad of the device. The thermal vias connect the top layer, the bottom layer and, in the case of the 4-layer board, the first inner GND plane. Each of the layers has a copper plane of equal area.

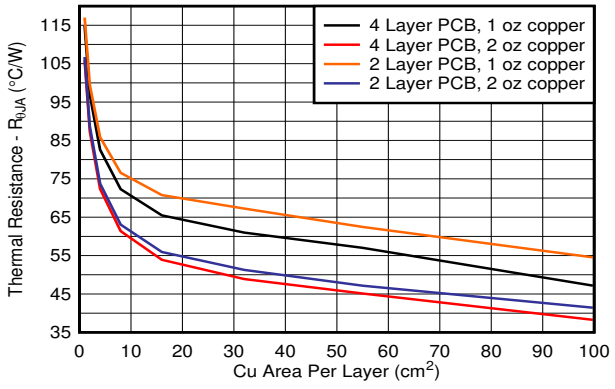

Figure 8-2. $R_{\theta JA}$ vs Copper Area 2s2p DCY Package

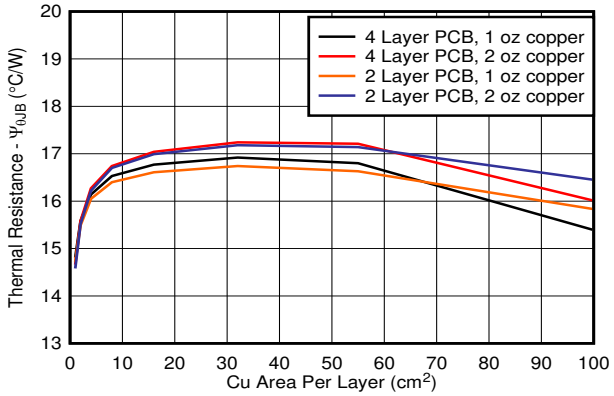

Figure 8-3. ψ_{JB} vs Copper Area 2s2p DCY Package

Copyright © 2021 Texas Instruments Incorporated

8.1.5 Estimating Junction Temperature

The JEDEC standard now recommends the use of psi (Ψ) thermal metrics to estimate the junction temperatures of the linear regulator when in-circuit on a typical PCB board application. These metrics are not thermal resistance parameters and instead offer a practical and relative way to estimate junction temperature. These psi metrics are determined to be significantly independent of the copper area available for heat-spreading. The *Thermal Information* table lists the primary thermal metrics, which are the junction-to-top characterization parameter (ψ_{JT}) and junction-to-board characterization parameter (ψ_{JB}). These parameters provide two methods for calculating the junction temperature (T_J), as described in the following equations. Use the junction-to-top characterization parameter (ψ_{JT}) with the temperature at the center-top of device package (T_T) to calculate the junction temperature. Use the junction-to-board characterization parameter (ψ_{JB}) with the PCB surface temperature 1 mm from the device package (T_B) to calculate the junction temperature.

$$T_J = T_T + \psi_{JT} \times P_D \quad (4)$$

where:

- P_D is the dissipated power
- T_T is the temperature at the center-top of the device package

$$T_J = T_B + \psi_{JB} \times P_D \quad (5)$$

where

- T_B is the PCB surface temperature measured 1 mm from the device package and centered on the package edge

For detailed information on the thermal metrics and how to use them, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2021 Texas Instruments Incorporated

8.2 Typical Application

Figure 8-4 shows a typical application circuit for the TPS7B83-Q1. Use different values of external components, depending on the end application. An application may require a larger output capacitor during fast load steps in order to prevent a reset from occurring. TI recommends a low-ESR ceramic capacitor with a dielectric of type X5R or X7R.

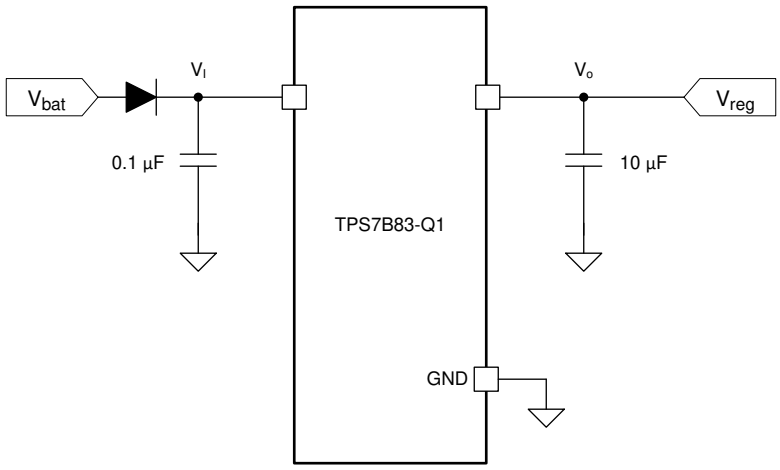

Figure 8-4. Typical Application Schematic for the TPS7B83-Q1

8.2.1 Design Requirements

For this design example, use the parameters listed in Table 8-1 as the input parameters.

Table 8-1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage range	6 V to 40 V
Output voltage	5 V
Output current	100 mA
Output capacitor	10 µF

8.2.2 Detailed Design Procedure

8.2.2.1 Input Capacitor

The device requires an input decoupling capacitor, the value of which depends on the application. The typical recommended value for the decoupling capacitor is 1 µF. The voltage rating must be greater than the maximum input voltage.

8.2.2.2 Output Capacitor

The device requires an output capacitor to stabilize the output voltage. The capacitor value must be between 2.2 µF and 200 µF and the ESR range must be between 1 mΩ and 2 Ω. For this design a low ESR, 10-µF ceramic capacitor was used to improve transient performance.

Copyright © 2021 Texas Instruments Incorporated

8.2.3 Application Curves

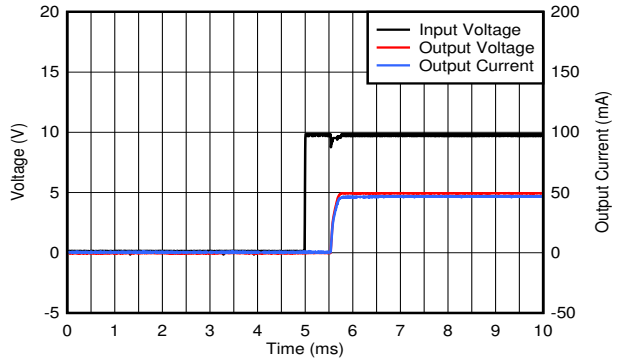

Figure 8-5. Power-Up Waveform

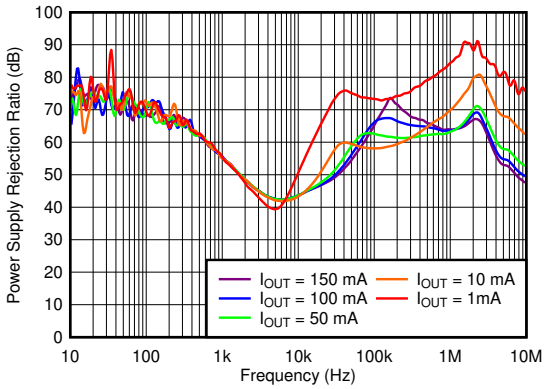

Figure 8-6. PSRR

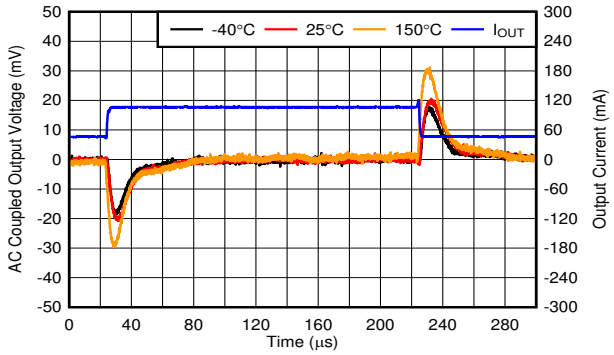

Figure 8-7. Transient Response

9 Power Supply Recommendations

This device is designed for operation from an input voltage supply with a range between 3 V and 40 V. This input supply must be well regulated. If the input supply is located more than a few inches from the TPS7B83-Q1, add an electrolytic capacitor and a ceramic bypass capacitor at the input.

Copyright © 2021 Texas Instruments Incorporated

10 Layout

10.1 Layout Guidelines

For best overall performance, place all circuit components on the same side of the circuit board and as near as practical to the respective LDO pin connections. Place ground return connections to the input and output capacitor, and to the LDO ground pin as close as possible to each other, connected by a wide, component-side, copper surface. The use of vias and long traces to the input and output capacitors is strongly discouraged and negatively affects system performance. TI also recommends a ground reference plane either embedded in the PCB itself or located on the bottom side of the PCB opposite the components. This reference plane serves to assure accuracy of the output voltage, shield noise, and behaves similarly to a thermal plane to spread (or sink) heat from the LDO device when connected to the thermal pad. In most applications, this ground plane is necessary to meet thermal requirements.

10.1.1 Package Mounting

Solder pad footprint recommendations for the TPS7B83-Q1 are available at the end of this document and at www.ti.com.

10.1.2 Board Layout Recommendations to Improve PSRR and Noise Performance

As depicted in Figure 10-1, place the input and output capacitors close to the device for the layout of the TPS7B83-Q1. In order to enhance the thermal performance, place as many vias as possible around the device. These vias improve the heat transfer between the different GND planes in the PCB.

To improve ac performance such as PSRR, output noise, and transient response, TI recommends a board design with separate ground planes for IN and OUT, with each ground plane connected only at the GND pin of the device. In addition, the ground connection for the output capacitor must connect directly to the GND pin of the device.

Minimize equivalent series inductance (ESL) and ESR in order to maximize performance and ensure stability. Place each capacitor as close as possible to the device and on the same side of the PCB as the regulator itself.

Do not place any of the capacitors on the opposite side of the PCB from where the regulator is installed. TI strongly discourages the use of vias and long traces to connect the capacitors because these can negatively impact system performance and may even cause instability.

If possible, and to ensure the maximum performance specified in this document, use the same layout pattern used for the TPS7B83-Q1 evaluation board, available at www.ti.com.

10.2 Layout Example

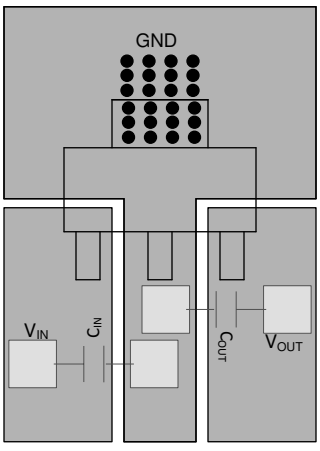

Figure 10-1. SOT-223 (DCY) Layout

Copyright © 2021 Texas Instruments Incorporated

11 Device and Documentation Support

11.1 Device Support

11.1.1 Device Nomenclature

Table 11-1. Device Nomenclature(1)

PRODUCT	V_{OUT}
TPS7B83**xx**QDCYRQ1	**xx** is the nominal output voltage (for example, 33 = 3.3 V V; 50 = 5.0 V). **Q** indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. **Q1** indicates that this device is an automotive grade (AEC-Q100) device.

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or visit the device product folder on www.ti.com.

11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.6 Glossary

TI Glossary — This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2021 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS7B8333QDCYRQ1	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8333
TPS7B8333QDCYRQ1.A	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8333
TPS7B8333QDCYRQ1M3	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8333
TPS7B8333QDCYRQ1M3.A	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8333
TPS7B8333QDCYRQ1W	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8333
TPS7B8333QDCYRQ1W.A	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8333
TPS7B8350QDCYRQ1	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8350
TPS7B8350QDCYRQ1.A	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8350
TPS7B8350QDCYRQ1M3	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8350
TPS7B8350QDCYRQ1M3.A	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8350
TPS7B8350QDCYRQ1W	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8350
TPS7B8350QDCYRQ1W.A	Active	Production	SOT-223 (DCY) | 4	2500 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	7B8350

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

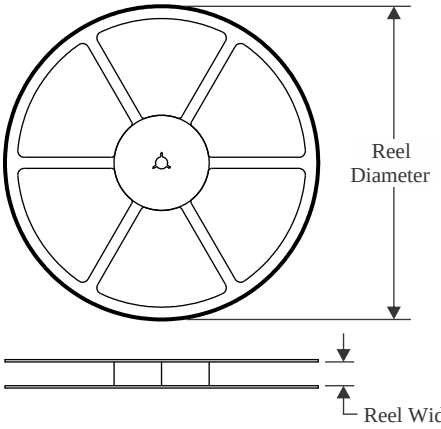

TAPE DIMENSIONS

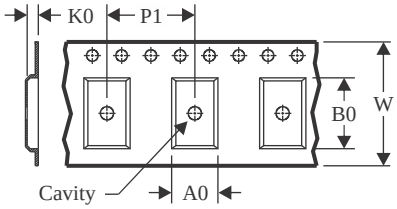

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

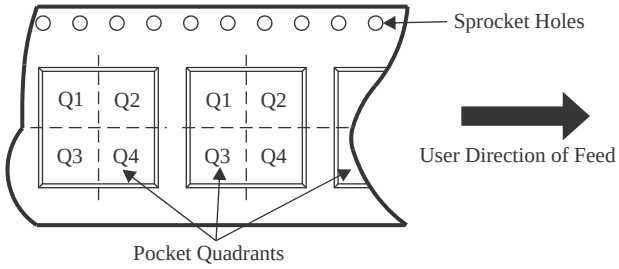

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS7B8333QDCYRQ1	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
TPS7B8333QDCYRQ1M3	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
TPS7B8333QDCYRQ1W	SOT-223	DCY	4	2500	330.0	16.4	7.05	7.4	1.9	8.0	16.0	Q3
TPS7B8350QDCYRQ1	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
TPS7B8350QDCYRQ1M3	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
TPS7B8350QDCYRQ1W	SOT-223	DCY	4	2500	330.0	16.4	7.05	7.4	1.9	8.0	16.0	Q3

TAPE AND REEL BOX DIMENSIONS

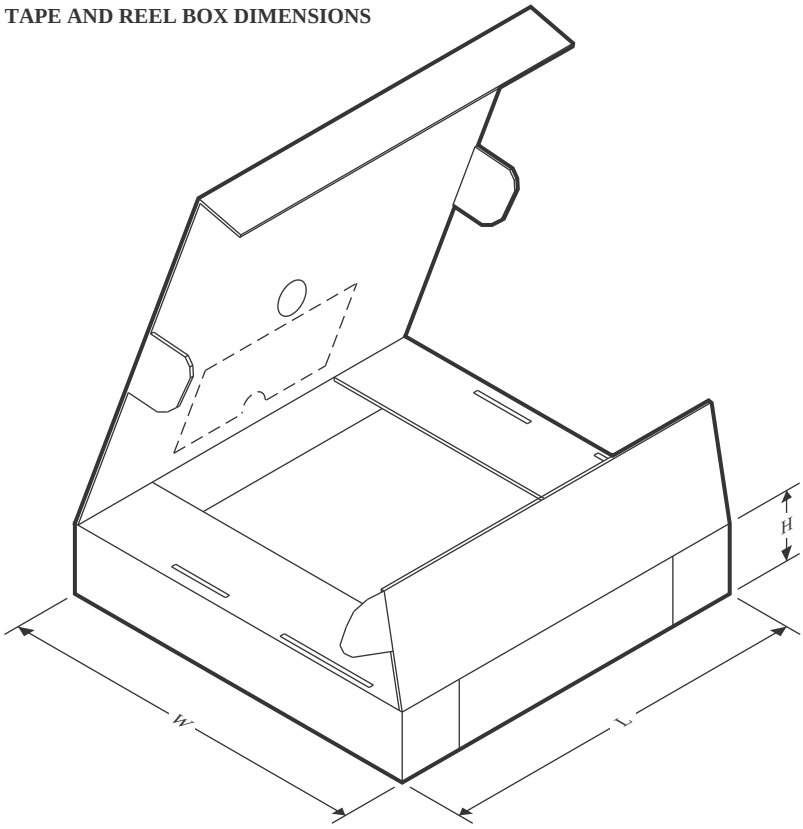

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS7B8333QDCYRQ1	SOT-223	DCY	4	2500	340.0	340.0	38.0
TPS7B8333QDCYRQ1M3	SOT-223	DCY	4	2500	340.0	340.0	38.0
TPS7B8333QDCYRQ1W	SOT-223	DCY	4	2500	340.0	340.0	38.0
TPS7B8350QDCYRQ1	SOT-223	DCY	4	2500	340.0	340.0	38.0
TPS7B8350QDCYRQ1M3	SOT-223	DCY	4	2500	366.0	364.0	50.0
TPS7B8350QDCYRQ1W	SOT-223	DCY	4	2500	340.0	340.0	38.0

PACKAGE OUTLINE

DCY0004A

SOT-223 - 1.8 mm max height

PLASTIC SMALL OUTLINE

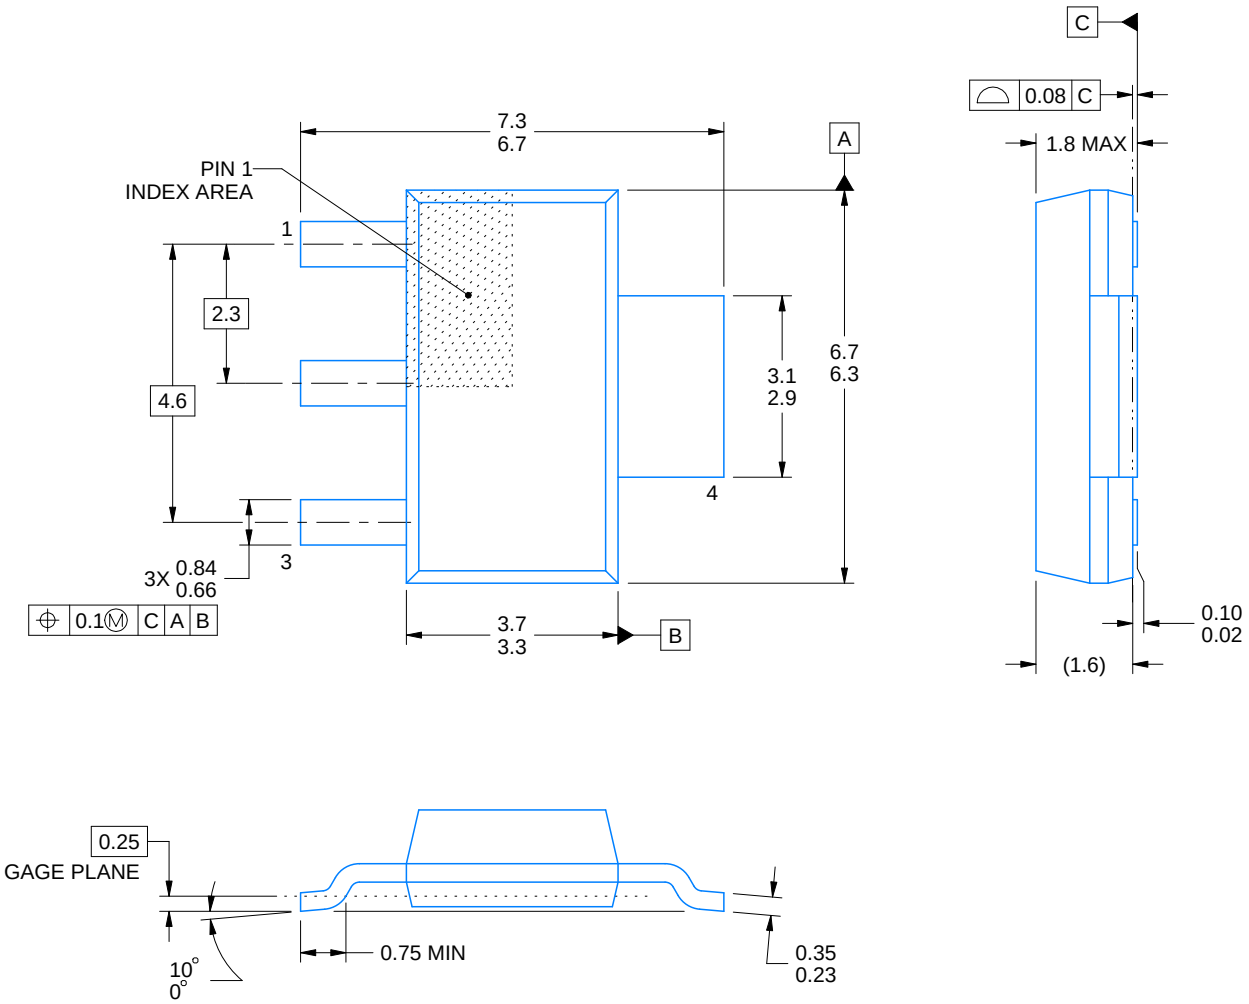

4214843/C 05/2026

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC TO-261.

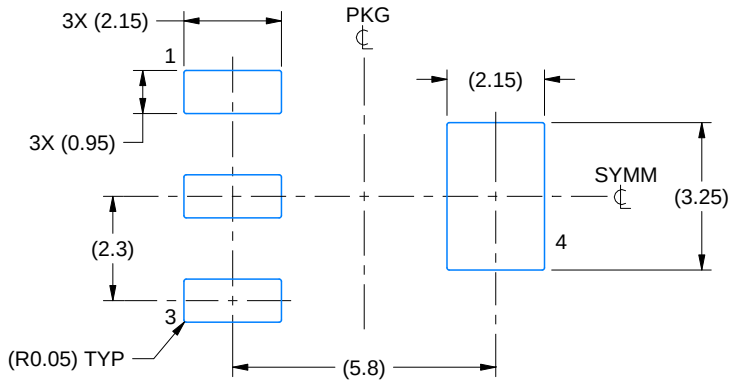

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:6X

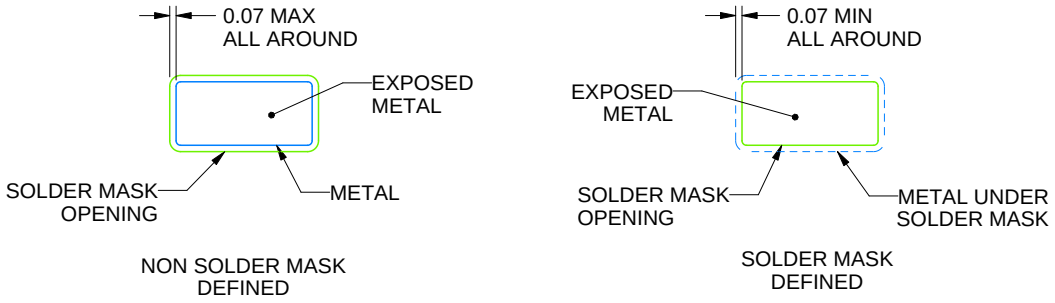

SOLDER MASK DETAILS

4214843/C 05/2026

NOTES: (continued)

4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DCY0004A

SOT-223 - 1.8 mm max height

PLASTIC SMALL OUTLINE

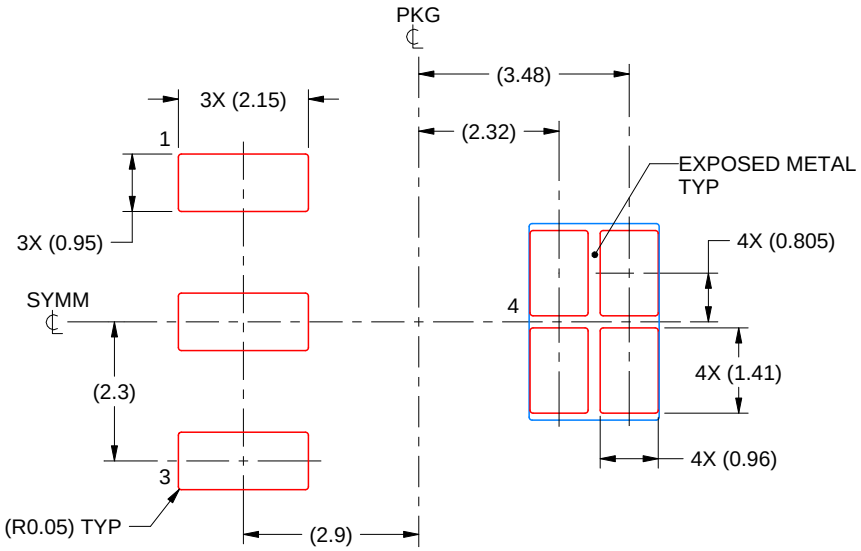

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X

4214843/C 05/2026

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.