TIP41CN
TIP42CN

COMPLEMENTARY SILICON POWER TRANSISTORS

PRELIMINARY DATA

- COMPLEMENTARY PNP-NPN DEVICES
- NEW ENHANCED SERIES
- HIGH SWITCHING SPEED
- h_{FE} GROUPING
- h_{FE} IMPROVED LINEARITY


APPLICATION

- GENERAL PURPOSE CIRCUITS
- AUDIO AMPLIFIER
- POWER LINEAR AND SWITCHING

DESCRIPTION

The TIP41CN is a silicon base island technology NPN power transistor Jedec TO-220 plastic package with improved performances than the industry standard TIP41C that make this device suitable for audio, power linear and switching applications.
The complementary PNP type is TIP42CN.

Figure 1: Package



TO-220

Figure 2: Internal Schematic Diagram

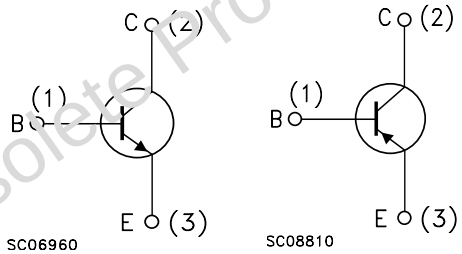


Table 1: Order Codes

Part Number	Marking	Package	Packaging
TIP41CN (#)	TIP41C NR TIP41C NO TIP41C NY	TO-220	Tube
TIP42CN (#)	TIP42C NR TIP42C NO TIP42C NY	TO-220	Tube

See:note on page 2

Table 2: Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
		NPN	TIP41CN	
		PNP	TIP42CN	
V_{CBO}	Collector-Base Voltage (I_E = 0)		100	V
V_{CEO}	Collector-Emitter Voltage (I_B = 0)		100	V
V_{EBO}	Emitter-Base Voltage (I_C = 0)		5	V
I_C	Collector Current		6	A
I_{CM}	Collector Peak Current (t_p < 5ms)		10	A

Obsolete Product(s) - Obsolete Product(s)

Symbol	Parameter		Value	Unit
		NPN	TIP41CN	
		PNP	TIP42CN	
I_B	Base Current		3	A
P_{tot}	Total Dissipation at $T_C \leq 25\ ^oC$		65	W
T_{stg}	Storage Temperature		-65 to 150	°C
T_J	Max. Operating Junction Temperature		150	°C

For PNP types voltage and current values are negative.

Table 3: Electrical Characteristics (T_{case} = 25 ^oC unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I_{CEO}	Collector Cut-off Current (I_B = 0)	V_{CE} = 60 V				0.7	mA
I_{EBO}	Emitter Cut-off Current (I_C = 0)	V_{EB} = 5 V				1	mA
I_{CES}	Collector Cut-off Current (V_{BE} = 0)	V_{CE} = 100 V				0.4	mA
$V_{CEO(sus)}$*	Collector-Emitter Sustaining Voltage (I_B = 0)	I_C = 30 mA		100			V
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 6 A	I_B = 0.6 A			1.5	V
$V_{BE(on)}$*	Base-Emitter Voltage	I_C = 6 A	V_{CE} = 4 V			2	V
h_{FE}*	DC Current Gain	I_C = 0.3 A	V_{CE} = 4 V	30			
		I_C = 3 A	V_{CE} = 4 V				
		Group R		15		28	
		Group O		24		44	
		Group Y		42		75	

* Pulsed: Pulsed duration = 300 μs, duty cycle $\leq$ 2 %.
For PNP types voltage and current values are negative.
Note: Product is pre-selected in DC current gain (Group R, Group O and Group Y). STMicroelectronics reserves the right to ship either groups according to production availability. Please contact your nearest STMicrolectronics sales office for delivery details.

Obsolete Product(s) - Obsolete Product(s)

Figure 3: DC Current Gain (NPN)

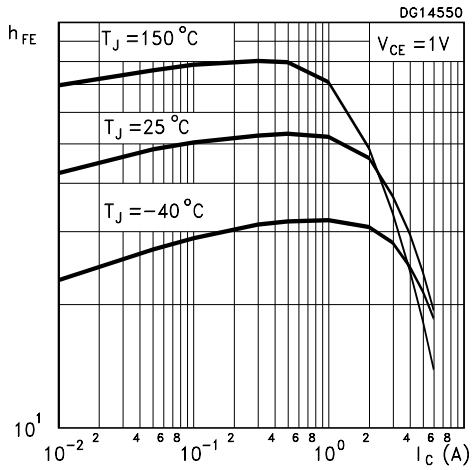


Figure 4: DC Current Gain (NPN)

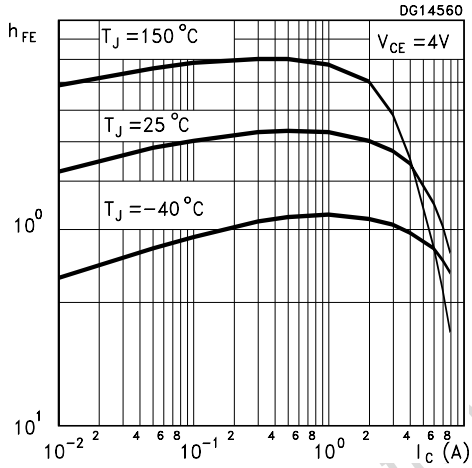


Figure 5: Collector-Emitter Saturation Voltage (NPN)

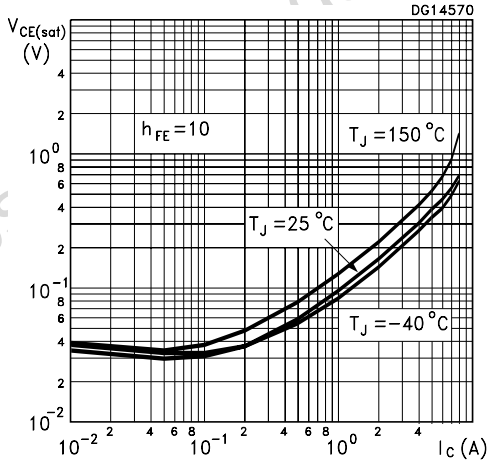


Figure 6: DC Current Gain (PNP)

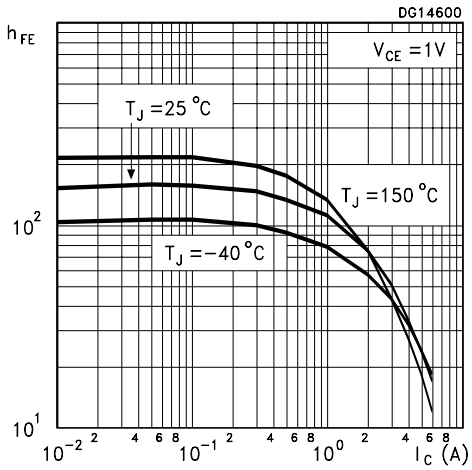


Figure 7: DC Current Gain (PNP)

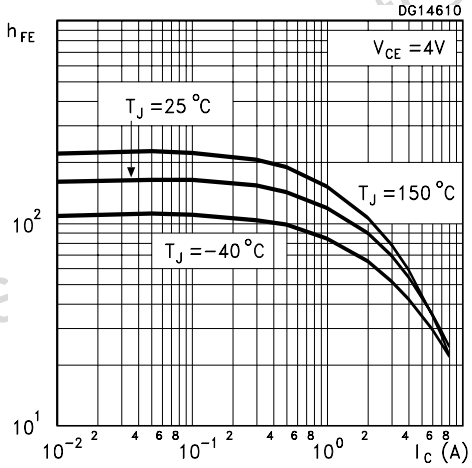


Figure 8: Collector-Emitter Saturation Voltage (PNP)

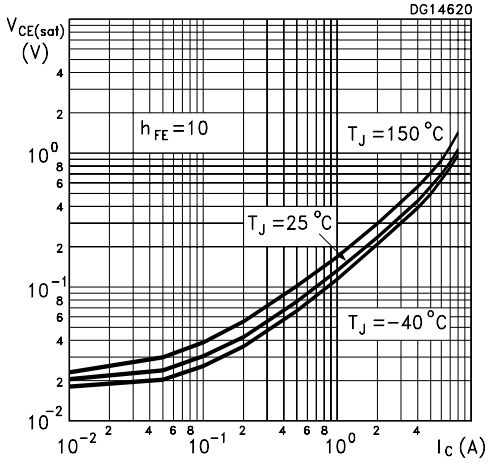


Figure 9: Base-Emitter Saturation Voltage (NPN)

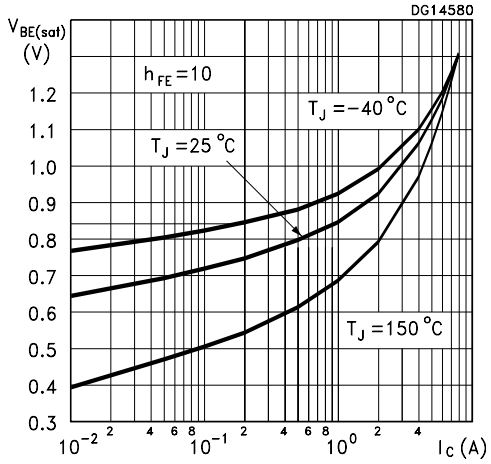


Figure 10: $BT_{(ON)}$ Time (NPN)

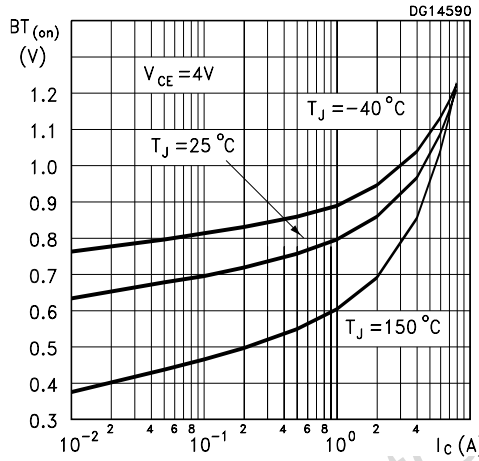


Figure 11: Resistive Load Switching Time (NPN

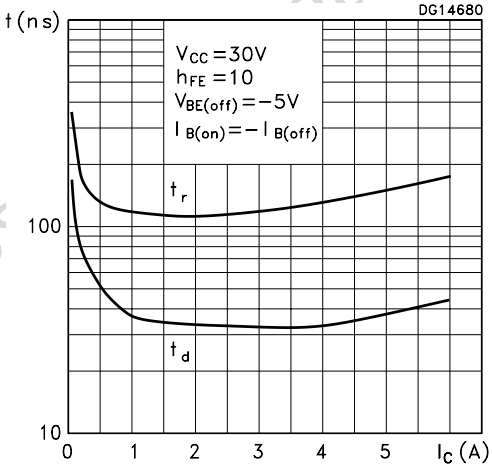


Figure 12: Base-Emitter Saturation Voltage (PNP

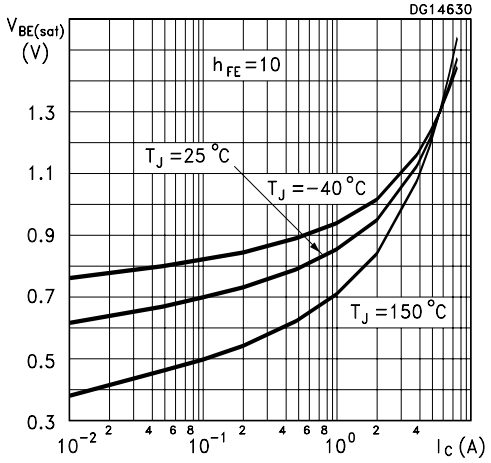


Figure 13: $BT_{(ON)}$ Time (PNP)

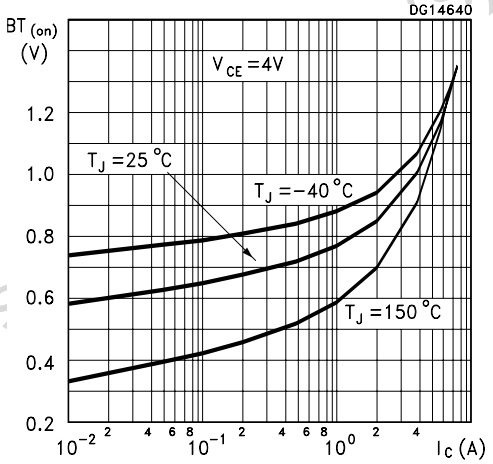


Figure 14: Resistive Load Switching Time (PNP)

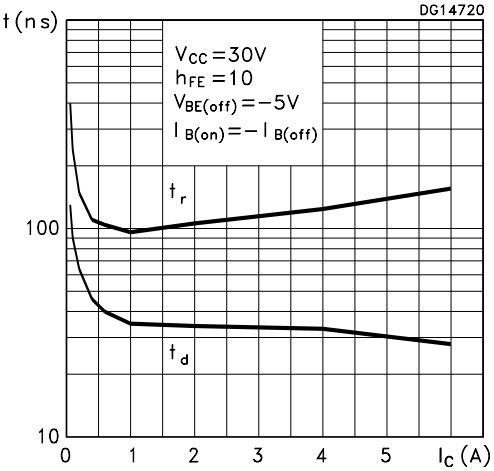


Figure 15: Resistive Load Switching Time (NPN)

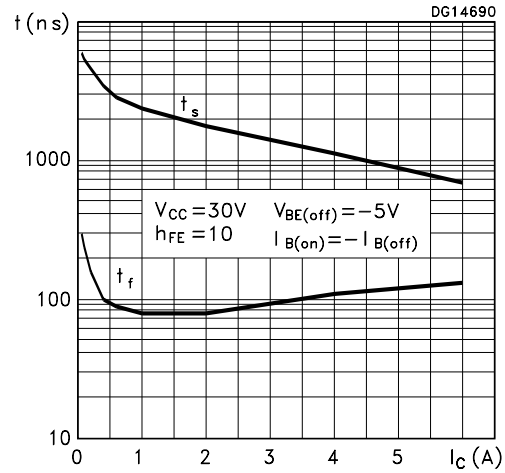


Figure 16: Collector-Base e Collector-Emitter Capacitance (NPN)

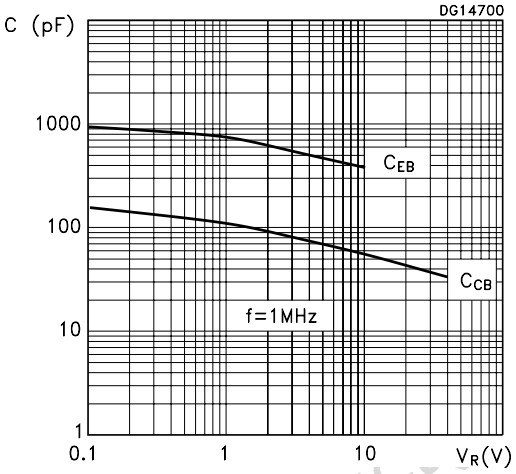


Figure 17: Resistive Load Switching Time (PNP)


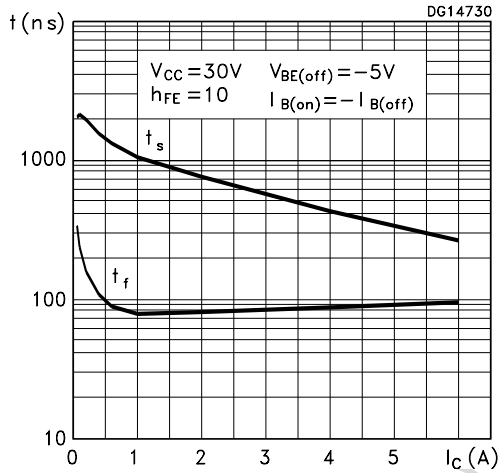


Figure 18: Collector-Base e Collector-Emitter Capacitance (PNP)

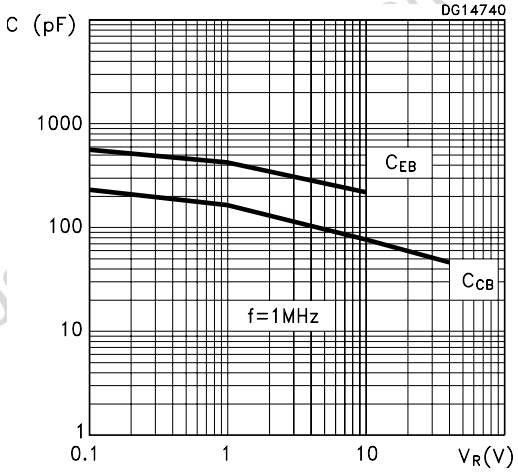

Obsolete Product(s) - Obs

TO-220 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
b	0.61		0.88	0.024		0.034
b1	1.15		1.70	0.045		0.066
c	0.49		0.70	0.019		0.027
D	15.25		15.75	0.60		0.620
E	10		10.40	0.393		0.409
e	2.40		2.70	0.094		0.106
e1	4.95		5.15	0.194		0.202
F	1.23		1.32	0.048		0.052
H1	6.20		6.60	0.244		0.256
J1	2.40		2.72	0.094		0.107
L	13		14	0.511		0.551
L1	3.50		3.93	0.137		0.154
L20		16.40			0.645	
L30		28.90			1.137	
øP	3.75		3.85	0.147		0.151
Q	2.65		2.95	0.104		0.116

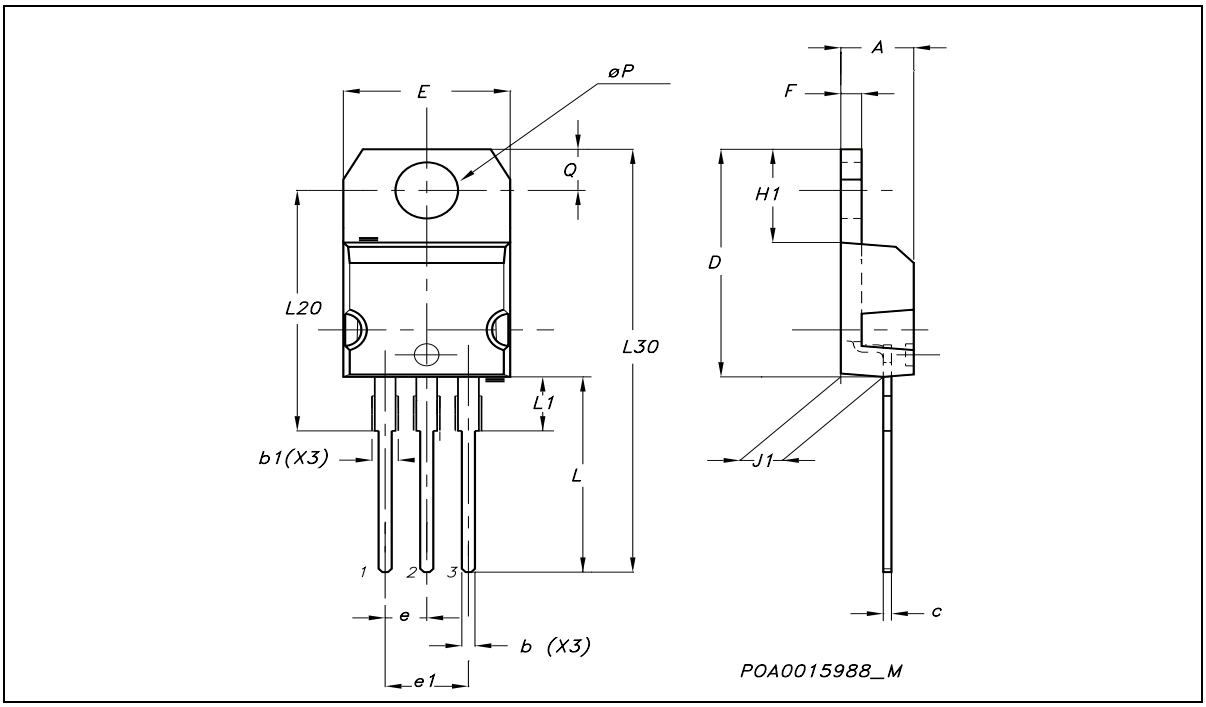


Table 4:

Version	Release Date	Change Designator
18-Mar-2005	1	First release.
06-Apr-2005	2	Further curves have been added.

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.