FAIRCHILD SEMICONDUCTOR™

November 1983
Revised April 2002

CD4051BC • CD4052BC • CD4053BC
Single 8-Channel Analog Multiplexer/Demultiplexer • Dual 4-Channel Analog Multiplexer/Demultiplexer • Triple 2-Channel Analog Multiplexer/Demultiplexer

CD4051BC • CD4052BC • CD4053BC Single 8-Channel Analog Multiplexer/Demultiplexer • Dual 4-Channel Analog Multiplexer/Demultiplexer • Triple 2-Channel Analog Multiplexer/Demultiplexer

General Description

The CD4051BC, CD4052BC, and CD4053BC analog multiplexers/demultiplexers are digitally controlled analog switches having low "ON" impedance and very low "OFF" leakage currents. Control of analog signals up to $15V_{p-p}$ can be achieved by digital signal amplitudes of 3–15V. For example, if V_{DD} = 5V, V_{SS} = 0V and V_{EE} = –5V, analog signals from –5V to +5V can be controlled by digital inputs of 0–5V. The multiplexer circuits dissipate extremely low quiescent power over the full V_{DD}–V_{SS} and V_{DD}–V_{EE} supply voltage ranges, independent of the logic state of the control signals. When a logical "1" is present at the inhibit input terminal all channels are "OFF".

CD4051BC is a single 8-channel multiplexer having three binary control inputs. A, B, and C, and an inhibit input. The three binary signals select 1 of 8 channels to be turned "ON" and connect the input to the output.

CD4052BC is a differential 4-channel multiplexer having two binary control inputs, A and B, and an inhibit input. The two binary input signals select 1 or 4 pairs of channels to be turned on and connect the differential analog inputs to the differential outputs.

CD4053BC is a triple 2-channel multiplexer having three separate digital control inputs, A, B, and C, and an inhibit input. Each control input selects one of a pair of channels which are connected in a single-pole double-throw configuration.

Features

- Wide range of digital and analog signal levels: digital 3 – 15V, analog to $15V_{p-p}$
- Low "ON" resistance: 80Ω (typ.) over entire $15V_{p-p}$ signal-input range for $V_{DD} - V_{EE}$ = 15V
- High "OFF" resistance: channel leakage of ±10 pA (typ.) at $V_{DD} - V_{EE}$ = 10V
- Logic level conversion for digital addressing signals of 3 – 15V ($V_{DD} - V_{SS}$ = 3 – 15V) to switch analog signals to 15 V_{p-p} ($V_{DD} - V_{EE}$ = 15V)
- Matched switch characteristics: ΔR_{ON} = 5Ω (typ.) for $V_{DD} - V_{EE}$ = 15V
- Very low quiescent power dissipation under all digital-control input and supply conditions: 1 μ W (typ.) at $V_{DD} - V_{SS} = V_{DD} - V_{EE}$ = 10V
- Binary address decoding on chip

Ordering Code:

Order Number	Package Number	Package Description
CD4051BCM	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
CD4051BCSJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
CD4051BCMTC	MTC16	16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
CD4051BCN	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
CD4052BCM	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
CD4052BCSJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
CD4052BCN	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
CD4053BCM	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
CD4053BCSJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
CD4053BCN	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide


Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

© 2002 Fairchild Semiconductor Corporation

Connection Diagrams


Pin Assignments for DIP and SOIC

CD4051BC




TOP VIEW

CD4052BC



TOP VIEW

CD4053BC



TOP VIEW


Truth Table

INPUT STATES				"ON" CHANNELS		
INHIBIT	**C**	**B**	**A**	**CD4051B**	**CD4052B**	**CD4053B**
0	0	0	0	0	0X, 0Y	cx, bx, ax
0	0	0	1	1	1X, 1Y	cx, bx, ay
0	0	1	0	2	2X, 2Y	cx, by, ax
0	0	1	1	3	3X, 3Y	cx, by, ay
0	1	0	0	4		cy, bx, ax
0	1	0	1	5		cy, bx, ay
0	1	1	0	6		cy, by, ax
0	1	1	1	7		cy, by, ay
1	*	*	*	NONE	NONE	NONE


*Don't Care condition.

Logic Diagrams

CD4051BC

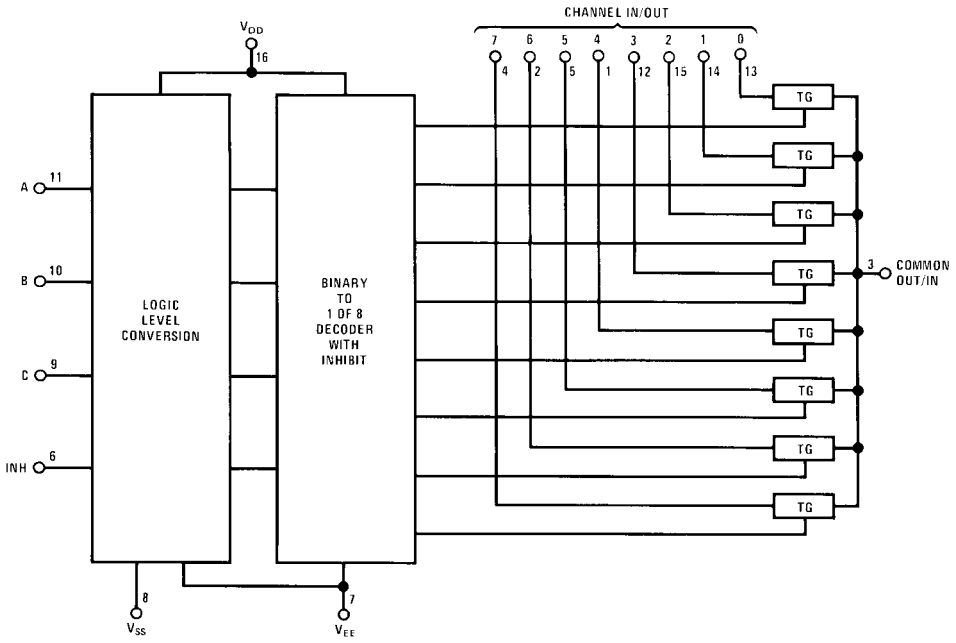


CD4052BC

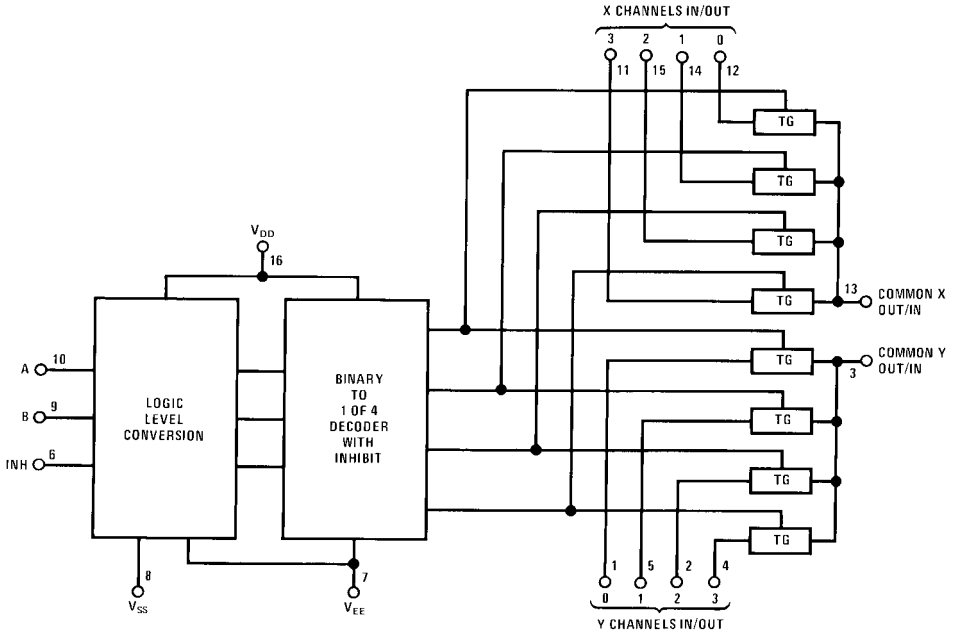

Logic Diagrams (Continued)

CD4053BC

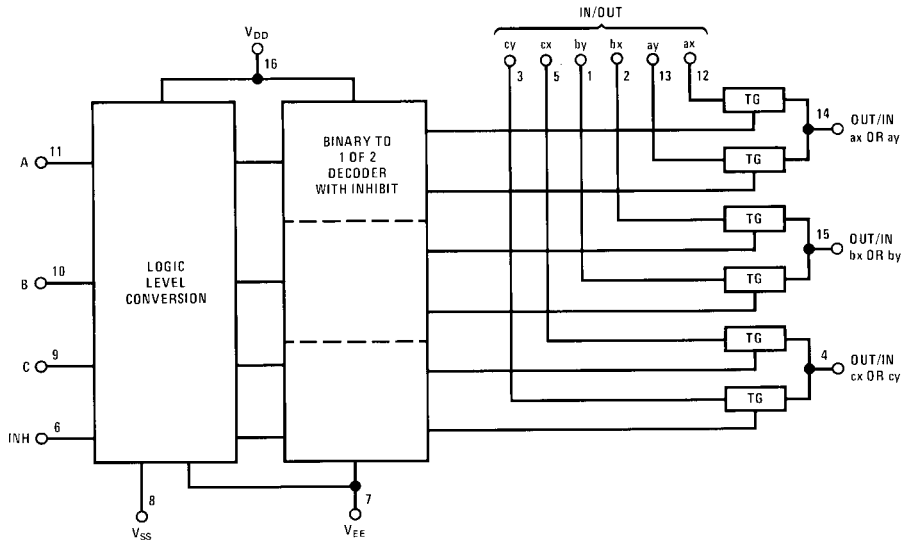

Absolute Maximum Ratings(Note 1)

DC Supply Voltage (V_{DD})	−0.5 V_{DC} to +18 V_{DC}
Input Voltage (V_{IN})	−0.5 V_{DC} to V_{DD} +0.5 V_{DC}
Storage Temperature Range (T_S)	−65°C to +150°C
Power Dissipation (P_D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature (T_L) (soldering, 10 seconds)	260°C

Recommended Operating Conditions

DC Supply Voltage (V_{DD})	+5 V_{DC} to +15 V_{DC}
Input Voltage (V_{IN})	0V to V_{DD} V_{DC}
Operating Temperature Range (T_A)	
CD4051BC/CD4052BC/CD4053BC	−55°C to +125°C

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The Electrical Characteristics tables provide conditions for actual device operation.

DC Electrical Characteristics (Note 2)

Symbol	Parameter	Conditions	−55°C		+25°			125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
Control A, B, C and Inhibit										
I_{IN}	Input Current	V_{DD} = 15V, V_{EE} = 0V, V_{IN} = 0V		−0.1		-10^{-5}	−0.1		−1.0	µA
		V_{DD} = 15V, V_{EE} = 0V, V_{IN} = 15V		0.1		10^{-5}	0.1		1.0	µA
I_{DD}	Quiescent Device Current	V_{DD} = 5V		5			5		150	µA
		V_{DD} = 10V		10			10		300	µA
		V_{DD} = 15V		20			20		600	µA
Signal Inputs (V_{IS}) and Outputs (V_{OS})										
R_{ON}	"ON" Resistance (Peak for $V_{EE} \le V_{IS} \le V_{DD}$)	R_L = 10 kΩ (any channel selected), V_{DD} = 2.5V, V_{EE} = −2.5V or V_{DD} = 5V, V_{EE} = 0V		800		270	1050		1300	Ω
		V_{DD} = 5V, V_{EE} = −5V or V_{DD} = 10V, V_{EE} = 0V		310		120	400		550	Ω
		V_{DD} = 7.5V, V_{EE} = −7.5V or V_{DD} = 15V, V_{EE} = 0V		200		80	240		320	Ω
ΔR_{ON}	Δ "ON" Resistance Between Any Two Channels	R_L = 10 kΩ (any channel selected), V_{DD} = 2.5V, V_{EE} = −2.5V or V_{DD} = 5V, V_{EE} = 0V				10				Ω
		V_{DD} = 5V, V_{EE} = −5V or V_{DD} = 10V, V_{EE} = 0V				10				Ω
		V_{DD} = 7.5V, V_{EE} = −7.5V or V_{DD} = 15V, V_{EE} = 0V				5				Ω
	"OFF" Channel Leakage Current, any channel "OFF"	V_{DD}=7.5V, V_{EE}=−7.5V, O/I=±7.5V, I/O=0V		±50		±0.01	±50		±500	nA
	"OFF" Channel Leakage Current, all channels "OFF" (Common OUT/IN)	Inhibit = 7.5V, V_{DD} = 7.5V, V_{EE} = −7.5V, O/I = 0V, I/O = ±7.5V, CD4051		±200		±0.08	±200		±2000	nA
		D4052		±200		±0.04	±200		±2000	nA
		CD4053		±200		±0.02	±200		±2000	nA

DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	−55°C		+25°			125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
Control Inputs A, B, C and Inhibit										
V_{IL}	LOW Level Input Voltage	$V_{EE} = V_{SS}$ R_L = 1 kΩ to V_{SS}								
		I_{IS}<2 μA on all OFF Channels								
		$V_{IS} = V_{DD}$ thru 1 kΩ								
		V_{DD} = 5V		1.5			1.5		1.5	
		V_{DD} = 10V		3.0			3.0		3.0	V
		V_{DD} = 15V		4.0			4.0		4.0	
V_{IH}	HIGH Level Input Voltage	V_{DD} = 5	3.5		3.5			3.5		
		V_{DD} = 10	7		7			7		V
		V_{DD} = 15	11		11			11		

Note 2: All voltages measured with respect to V_{SS} unless otherwise specified.

AC Electrical Characteristics (Note 3)

$T_A = 25°C$, $t_r = t_f = 20$ ns, unless otherwise specified.

Symbol	Parameter	Conditions	V_{DD}	Min	Typ	Max	Units
t_{PZH},	Propagation Delay Time from	$V_{EE} = V_{SS} = 0V$	5V		600	1200	
t_{PZL}	Inhibit to Signal Output	$R_L = 1\ k\Omega$	10V		225	450	ns
	(channel turning on)	$C_L = 50$ pF	15V		160	320	
t_{PHZ},	Propagation Delay Time from	$V_{EE} = V_{SS} = 0V$	5V		210	420	
t_{PLZ}	Inhibit to Signal Output	$R_L = 1\ k\Omega$	10V		100	200	ns
	(channel turning off)	$C_L = 50$ pF	15V		75	150	
C_{IN}	Input Capacitance						
	Control input				5	7.5	pF
	Signal Input (IN/OUT)				10	15	
C_{OUT}	Output Capacitance						
	(common OUT/IN)						
	CD4051		10V		30		
	CD4052	$V_{EE} = V_{SS} = 0V$	10V		15		pF
	CD4053		10V		8		
C_{IOS}	Feedthrough Capacitance				0.2		pF
C_{PD}	Power Dissipation Capacitance						
	CD4051				110		
	CD4052				140		pF
	CD4053				70		
Signal Inputs (V_{IS}) and Outputs (V_{OS})							
	Sine Wave Response	$R_L = 10\ k\Omega$					
	(Distortion)	$f_{IS} = 1$ kHz	10V		0.04		%
		$V_{IS} = 5\ V_{p-p}$					
		$V_{EE} = V_{SI} = 0V$					
	Frequency Response, Channel	$R_L = 1\ k\Omega$, $V_{EE} = 0V$, $V_{IS} = 5V_{p-p}$,	10V		40		MHz
	"ON" (Sine Wave Input)	$20 \log_{10} V_{OS}/V_{IS} = -3$ dB					
	Feedthrough, Channel "OFF"	$R_L = 1\ k\Omega$, $V_{EE} = V_{SS} = 0V$, $V_{IS} = 5V_{p-p}$,	10V		10		MHz
		$20 \log_{10} V_{OS}/V_{IS} = -40$ dB					
	Crosstalk Between Any Two	$R_L = 1\ k\Omega$, $V_{EE} = V_{SS} = 0V$, $V_{IS}(A) = 5V_{p-p}$	10V		3		MHz
	Channels (frequency at 40 dB)	$20 \log_{10} V_{OS}(B)/V_{IS}(A) = -40$ dB (Note 4)					
t_{PHL}	Propagation Delay Signal	$V_{EE} = V_{SS} = 0V$	5V		25	55	
t_{PLH}	Input to Signal Output	$C_L = 50$ pF	10V		15	35	ns
			15V		10	25	
Control Inputs, A, B, C and Inhibit							
	Control Input to Signal	$V_{EE} = V_{SS} = 0V$, $R_L = 10\ k\Omega$ at both ends					
	Crosstalk	of channel.	10V		65		mV (peak)
		Input Square Wave Amplitude = 10V					
t_{PHL},	Propagation Delay Time from	$V_{EE} = V_{SS} = 0V$	5V		500	1000	
t_{PLH}	Address to Signal Output	$C_L = 50$ pF	10V		180	360	ns
	(channels "ON" or "OFF")		15V		120	240	

Note 3: AC Parameters are guaranteed by DC correlated testing.


Note 4: A, B are two arbitrary channels with A turned "ON" and B "OFF".

Special Considerations


In certain applications the external load-resistor current may include both V_{DD} and signal-line components. To avoid drawing V_{DD} current when switch current flows into IN/OUT pin, the voltage drop across the bidirectional switch must not exceed 0.6V at $T_A \leq 25°C$, or 0.4V at $T_A > 25°C$ (calculated from R_{ON} values shown). No V_{DD} current will flow through R_L if the switch current flows into OUT/IN pin.

Typical Performance Characteristics


"ON" Resistance vs Signal Voltage for $T_A = 25°C$




"ON" Resistance as a Function of Temperature for $V_{DD} - V_{EE} = 10V$




"ON" Resistance as a Function of Temperature for $V_{DD} - V_{EE} = 15V$




"ON" Resistance as a Function of Temperature for $V_{DD} - V_{EE} = 5V$




Switching Time Waveforms

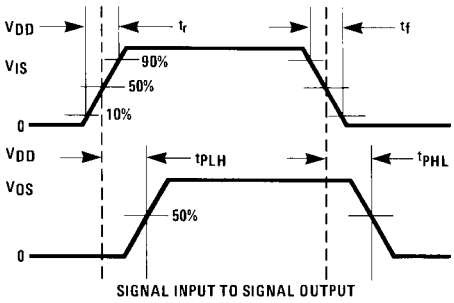



SIGNAL INPUT TO SIGNAL OUTPUT

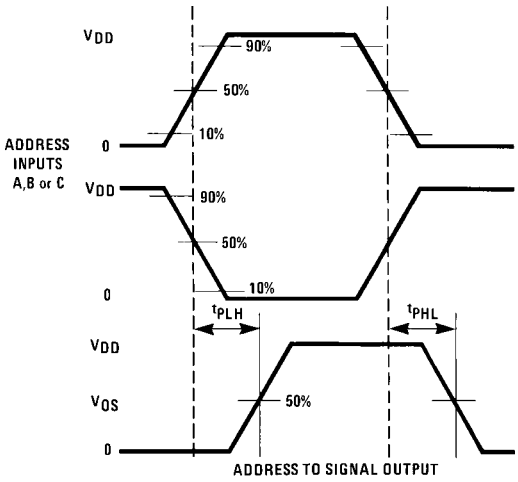


ADDRESS TO SIGNAL OUTPUT

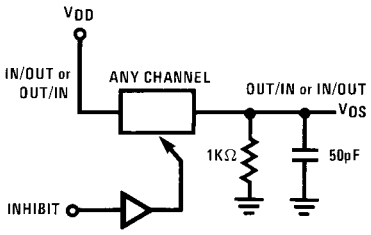


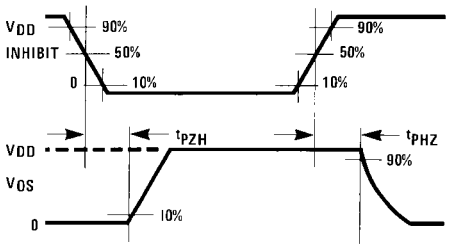



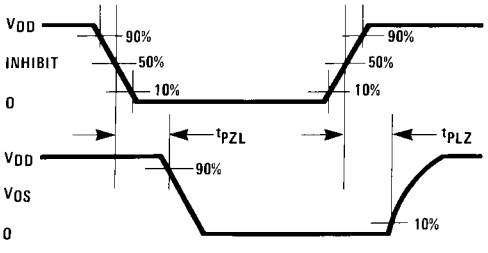


Physical Dimensions inches (millimeters) unless otherwise noted

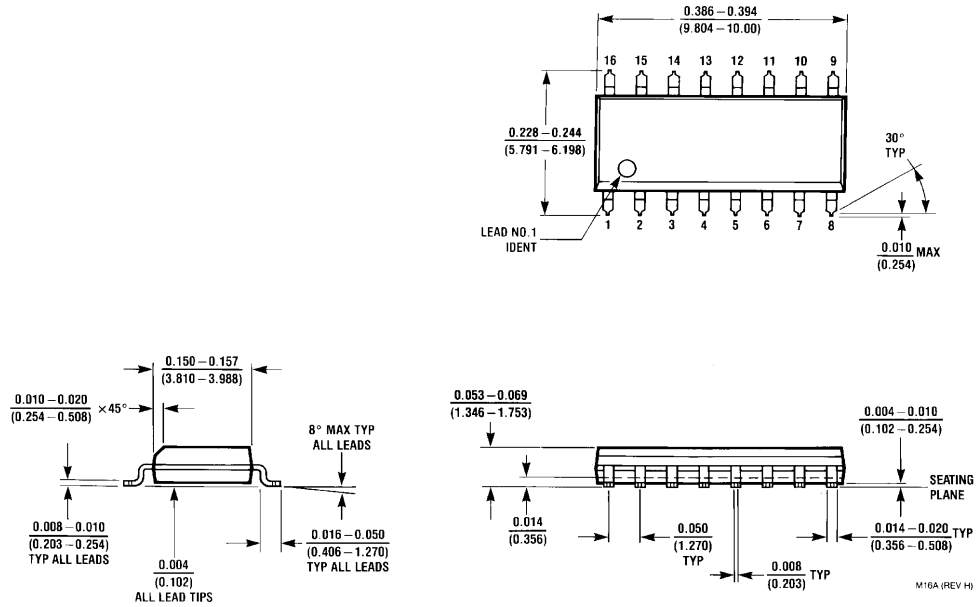

16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
Package Number M16A

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

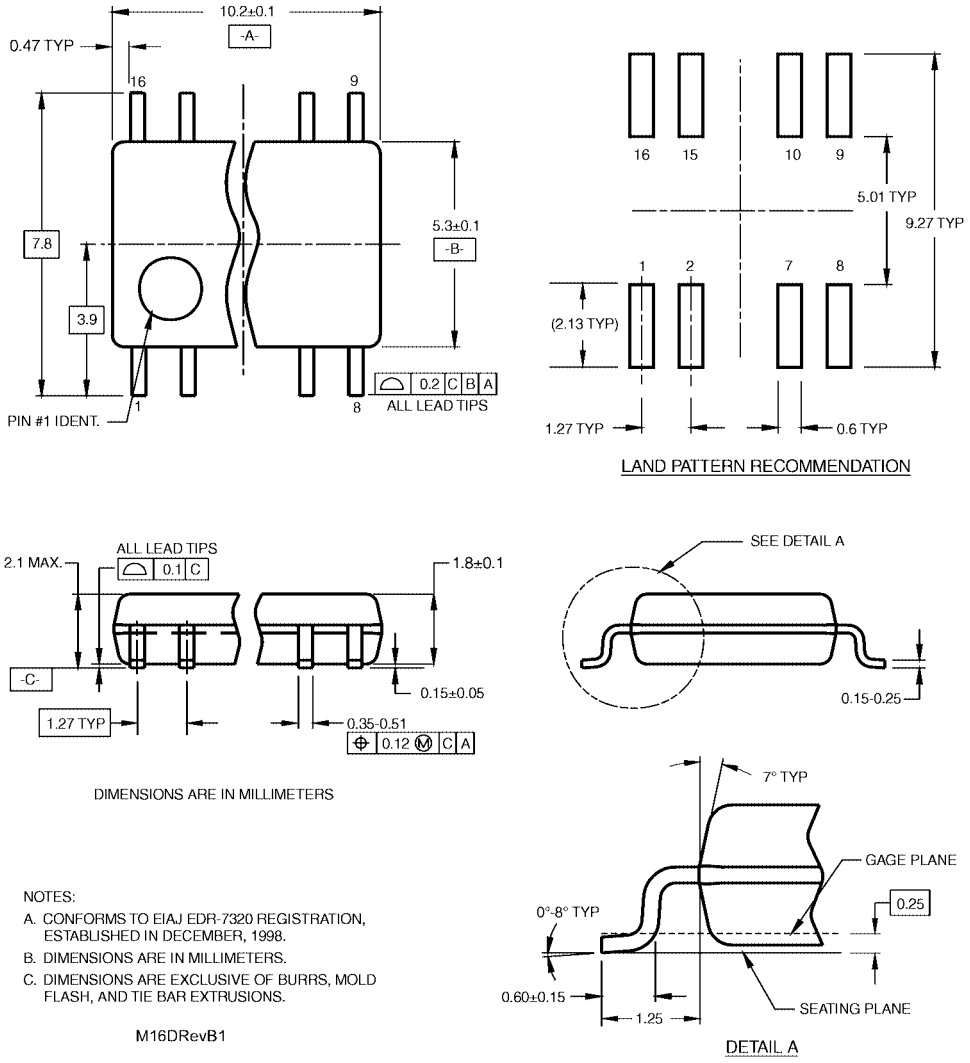

NOTES:

A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.


B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M16DRevB1


16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
Package Number M16D

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

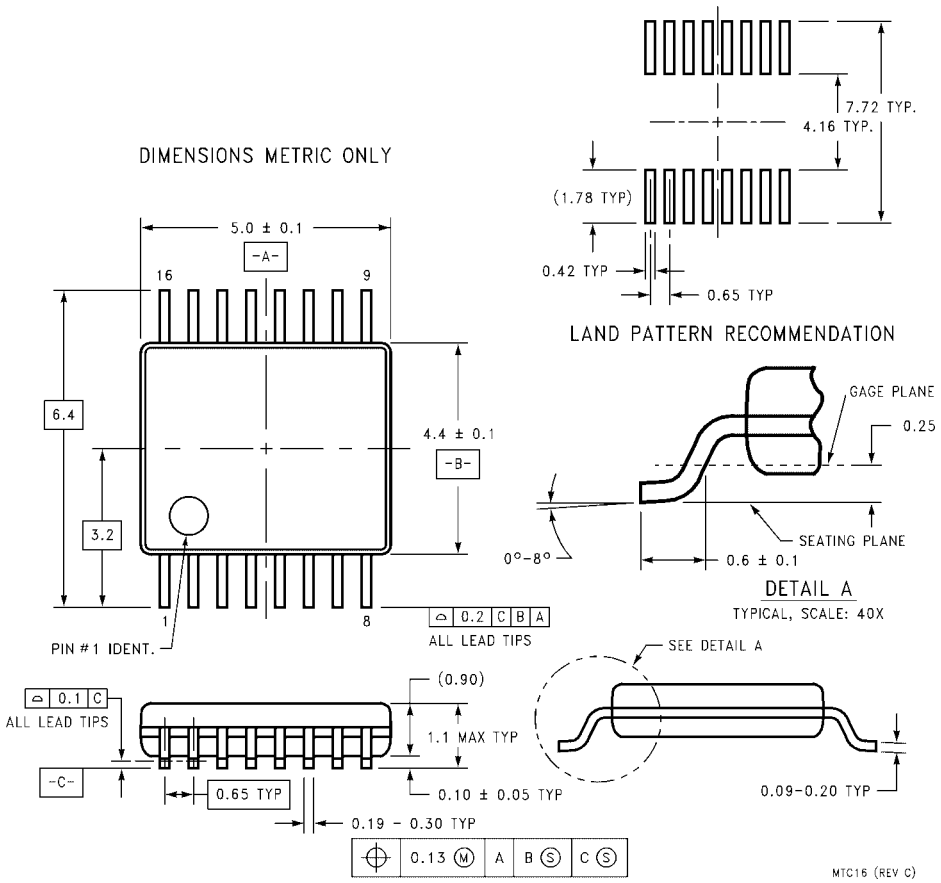

16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
Package Number MTC16

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

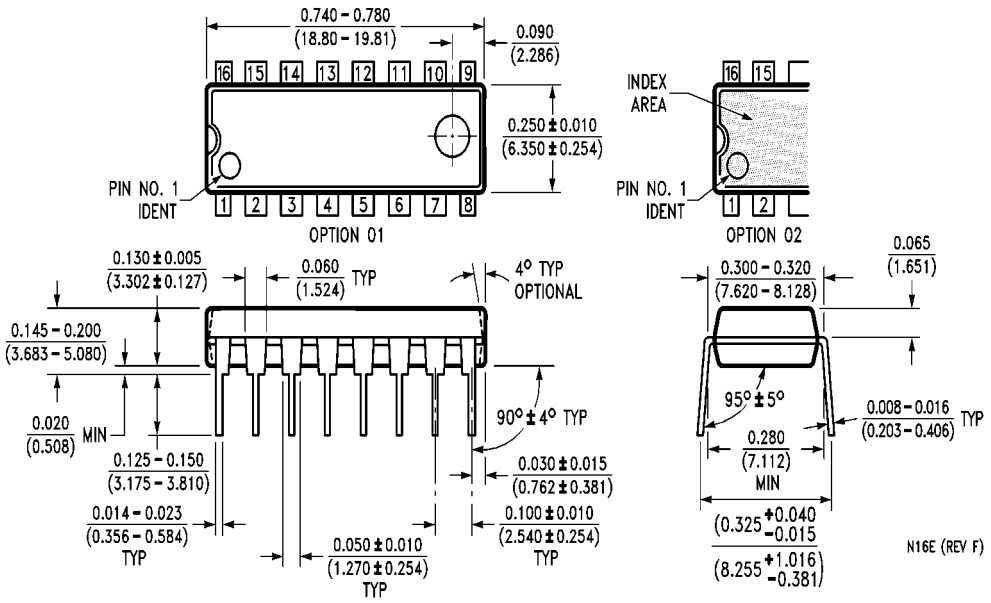

16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
Package Number N16E

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.